




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) "Acacia Evolution" Chrome plated wall mounted basin mixer; Nominal flow rate 4.7L/Min in WELS Grade 1 ; Registration No. TM 18-0127
Dimensions	201mm spout long
Model	CF-1304.101.50 (Mixer) 40.8051.010 (Aerator)
Material/Finish	Brass/ Chrome Plated
Manufacturer	American Standard (PRC)
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

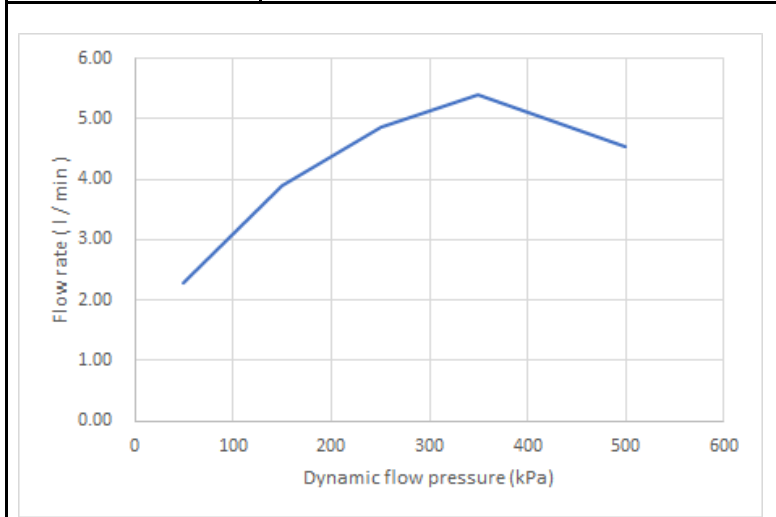

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l/min)	2.28	3.90	4.85	5.40	4.55

Note: Same product but different model no: WF-1303.101.50


* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

- Water Saving:
Conserving water is as important to us as it is to you. It makes ecological and economical sense. After all, the less water you use, the better future we have.
Ceramic Disc Cartridge:
American Standard patents its ceramic disc valve technology which keeps faucets drip-free with smooth handle performance for a lifetime of use.
Design Philosophy:
American Standard products are designed to express the uniqueness of your personality. Our design philosophy focuses on total relaxation, maximum utility and technological innovations.

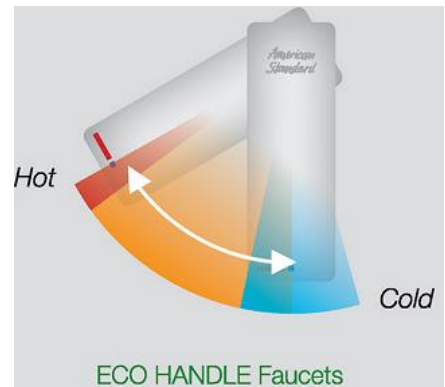

PREVENTS WATER WASTAGE

By providing a resistance midway when lifting the lever, this technology gives you better water volume control, saving you precious water.



PROVIDES UP TO 30% ENERGY SAVINGS

Unlike conventional mixers, Acacia Evolution's Eco Handle releases cold water instead of warm water upon lifting the lever. This saves you precious energy as it prevents the boiler from heating up, resulting up to 30% energy savings. To get hot water, you only need to move the lever to the left.



GOOD DESIGN AWARD 2014

Acacia Evolution **Water Evolution**

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.): TM 18-0127




自願參與用水效益標籤計劃 - 水龍頭
Voluntary Water Efficiency Labelling Scheme - Water Taps



茲證明
This is to certify that

將下列水龍頭在本計劃內註冊：
has registered the following water tap under this scheme :

牌子 / Brand	:	American Standard
型號 / Model	:	CF-1304.101.50 + 40.8051.010
種類 / Type	:	Mixing
原產地 / Country or Region Origin	:	China

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:		滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1	
耗水量 <i>Water Consumption</i>	:	4.7	公升/分鐘 <i>litres/minute</i>

簽發日期: 31 May 2018
Date of Issue:

 水務署
Water Supplies Department



水務署署長(周世威代行)
for Director of Water Supplies



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

48/F Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號
Our ref.
來函檔號
Your ref.



2023 T/J(699/2023)

電話

Tel.

傳真

Fax.

: 2824 0578

31 August 2023



**Approval of “AMERICAN STANDARD” Basin Mixer
(General Acceptance No. C20230643)**

Your E-Application [file-id: ETJ-GA-20230705-75] dated 6 July 2023 and subsequent submission received by this department on 9 August 2023 refer.

Having considered the test report ref. 222320PC220195 issued on 28 November 2022 by Fugro Technical Services Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Jiangmen LIXIL AS Sanitary Fitting Manufacturing Co Ltd

Country of Origin: the Mainland of China

Brand: American Standard

Details of Fitting: 1/2" Wall mounted single lever basin mixer

Model: CF-1304.101.50

Body Markings: *American Standard*

Expiry Date: 25 August 2027



This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

“The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply.”

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,



(YAU Hau Yin)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only