



Acme Sanitary Ware Co Ltd



Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk



Pure Freude
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Allure" Chrome plated thermostatic shower mixer with concealed body	<div>Illustration/ Drawing</div> <div></div>
Dimensions	L171 x W101 x H197 mm	
Model	19380000 (Thermostatic shower mixer) 35500000 (Separate concealed body)	
Finish	Chrome Plated	
Country of origin	Germany	
Manufacturer	GROHE Limited	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen (852) 2388-7171 / (852) 2710-8012	
Contact Tel/Fax	acme@acmesanitary.com.hk	
E-mail	www.acmesanitary.com.hk	
Website		
"Allure" <u>Thermostatic shower mixer</u>	<ul style="list-style-type: none">· set for final installation for GROHE Rapido T 35 500 000 / 35 050 000· GROHE StarLight chrome finish· temperature scale handle with GROHE SafeStop safety stop at 38°C (calibration required)· GROHE SafeStop Plus optional temperature limiter at 43°C included· volume handle with GROHE EcoButton (economy button with individually adjustable economy stop)· metal handles· metal escutcheon· covered fixing· ceramic headpart 1/2", 180°· without concealed body· TMV2 compliant when used with 35 050 000	<div><u>"GROHE Rapido T"</u> <u>Thermostatic mixer for concealed installation</u></div> <div></div> <ul style="list-style-type: none">· for use with Grohtherm Special· without finishing trim set· flat installation depth 70 - 95 mm· easy to install, premounted and tested unit· GROHE TurboStat compact cartridge with wax thermoelement· two top outlets 1/2", lockable· high flow rate up to 50 l/min. by use of three outlets· bottom outlet 1/2" can be used only with separate stop valve· safe to install, stable built-in-box and protective cap· fixation options for solid walls and dry cladding· material for wall sealing included· Aquadimmer-diverter for bath mixer or stop valve for shower mixer in finishing trim set· body of DR brass· built-in non return valves and dirt strainers· GROHE EcoJoy technology for less water and perfect flow· min. recommended pressure 1.0 bar

Note: [YouTube \(35500000 Grohe Rapido T Universal\) https://www.youtube.com/watch?v=M5vICM45qkE](https://www.youtube.com/watch?v=M5vICM45qkE)

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www.acmesanitaryware.com.hk



Pure Freude
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	



SANITARY WARE SPECIFICATION SHEET

GROHE ALLURE

BEAUTY MEETS FUNCTION

Perfectly balanced proportions on the outside and technically advanced on the inside – Allure unites inherent beauty with unmatched performance. Cylindrical bodies rise from square and rectangular base plates adding to its minimalist appeal, while the collection offers a choice of two handle styles – a flat lever or a tri-spoke design – to meet your exacting requirements.

Faucets and fittings in this collection illustrate our commitment to unrivalled quality in the bathroom.

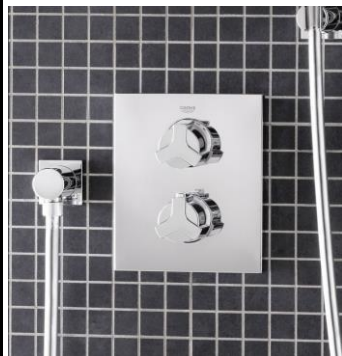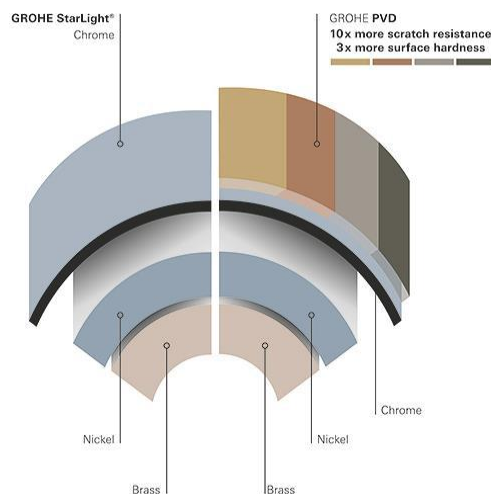

GROHE SafeStop (Plus) – double scalding protection at 38°C and (optional) 43°C

Great for homes with children, this safety feature is set at 38°C, preventing you from turning up the water temperature too high. If desired, higher temperatures can be selected by pushing the button. Optional for extra safety: the easy-to-fit GROHE SafeStop Plus limiter ensures that the temperature does not exceed 43°C.



GROHE EcoButton – reduce your water consumption by up to 50% at the push of a button

Using this button you can select either a full water flow, e.g. for quick tub filling, or reduce your water consumption by up to 50% – without compromising on your comfort!



Constant water temperature thanks to reliable GROHE TurboStat technology

Our precise control technology ensures an instant water flow at the desired temperature and keeps it constant irrespective of any fluctuations in water pressure or supply.



GROHE EcoJoy with water-saving function for reduced consumption

GROHE EcoJoy reduces water consumption by up to 50% without compromising on performance. Whenever you turn on your tap, you will enjoy a full jet of water while saving money nonetheless.

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd


Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www.acmesanitaryware.com.hk



Pure Freude
an Wasser


PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

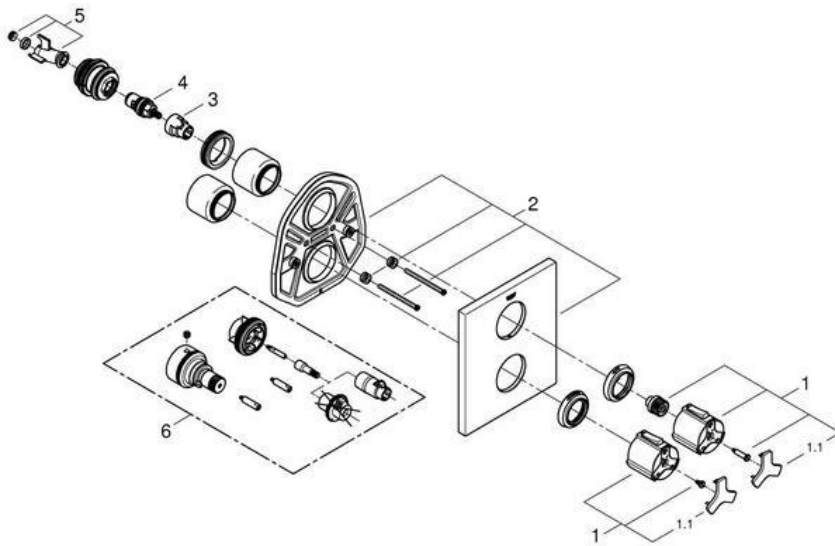

Pos.-nr.	Prod. description	Order-nr.
1	Scale handle Neotherm	47786000
1.1	Cover cap	0635600M
2	Escutcheon	47785000
3	Stop	10093000
4	Ceramic headpart, 1/2"	45346000
5	Adapter	12702000
6	Extension-set 27.5 mm	47780000*

* Optional accessories

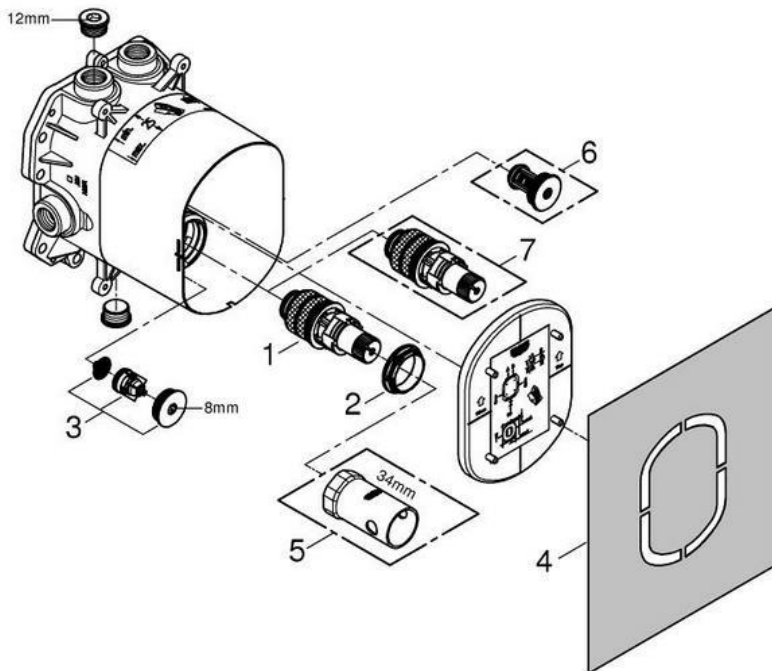

Pos.-nr.	Prod. Description	Order-nr.
1	Thermostatic compact cartridge 3/4"	47483000
2	Fitting ring	47765000
3	Non-return valve	47753000
4	Repl. kit f. seal	48263000
5	Socket spanner	19332000*
6	Safety combination (DIN EN 1717)	29007000*
7	Thermostatic compact cartridge 3/4"	47186000*

* Optional accessories

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.