











Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

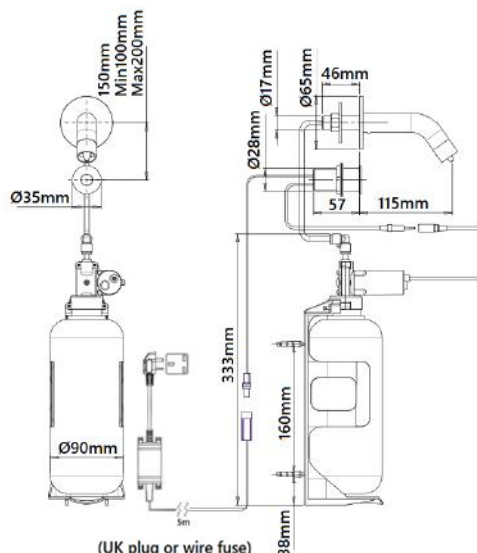SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Stern (Israel) "Extreme CS SD AISI316" Stainless steel AISI316 liquid soap dispenser with built-in sensor in AC Supply with 5m wire AC 110-240 Vac 50/60Hz to 12V 2.5A IP68 waterproof switching transformer	Illustration/ Drawing														
Dimensions	L115 x W35 x H65 mm															
Model	Extreme CS Soap Dispenser E AISI316															
Code Number	237890-316															
Finish	Stainless Steel AISI316															
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen															
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012															
E-mail	acme@acmesanitary.com.hk															
Website	www.acmesanitary.com.hk															
EXTREME CS SD E AISI316 Ref # 237890-316 Touch free electronic soap dispenser for installations in brick walls. Activated by concealed sensor built into the spout. Stainless Steel AISI316 body, other finishes available. Includes a 1 liter soap bottle and bottle support. Optional for remote installation: extension cable and longer piping. The following functions can be performed by using Stern remote control: soap quantity selection, refill the soap tank, temporary off, coming back to factory settings. *Versions for multifeed installation available.																
Application: Closing automatically without dripping, Stern’s touch free soap dispenser helps to ensure that the bathroom will stay organized and neat. Combined with Extreme WM touch free electronic faucet, it creates a germ-free and automated environment.																
Use: Touch free electronic soap dispenser. The soap dispenser is activated automatically when the users bring their hands within the sensor range and stops when the users remove their hands.																
<table><tr><th colspan="2">PRODUCT AT A GLANCE</th></tr><tr><td>Installation</td><td>Wall mounted. Regular installation with the bottle below the lavatory or remote installation with bottle support kit to be secured to the wall.</td></tr><tr><td>Power Supply</td><td><ul style="list-style-type: none">Battery box for six (6) DD batteries12V transformer</td></tr><tr><td>Soap</td><td>1 Liter soap bottle. This soap dispenser includes a peristaltic pump that allows the use of any kind of liquid soap, detergent or antibacterial gel.</td></tr><tr><td>Soap Dose</td><td>Factory setting for 0.7 to 0.9 cc depending on the selected soap. The soap quantity can be changed using the soap dispenser’s remote control.</td></tr><tr><td>Refill</td><td>Easy to use refill button in order the soap will start to come out of the soap dispenser spout. This function can also be performed with the remote control.</td></tr></table>			PRODUCT AT A GLANCE		Installation	Wall mounted. Regular installation with the bottle below the lavatory or remote installation with bottle support kit to be secured to the wall.	Power Supply	<ul style="list-style-type: none">Battery box for six (6) DD batteries12V transformer	Soap	1 Liter soap bottle. This soap dispenser includes a peristaltic pump that allows the use of any kind of liquid soap, detergent or antibacterial gel.	Soap Dose	Factory setting for 0.7 to 0.9 cc depending on the selected soap. The soap quantity can be changed using the soap dispenser’s remote control.	Refill	Easy to use refill button in order the soap will start to come out of the soap dispenser spout. This function can also be performed with the remote control.		
PRODUCT AT A GLANCE																
Installation	Wall mounted. Regular installation with the bottle below the lavatory or remote installation with bottle support kit to be secured to the wall.															
Power Supply	<ul style="list-style-type: none">Battery box for six (6) DD batteries12V transformer															
Soap	1 Liter soap bottle. This soap dispenser includes a peristaltic pump that allows the use of any kind of liquid soap, detergent or antibacterial gel.															
Soap Dose	Factory setting for 0.7 to 0.9 cc depending on the selected soap. The soap quantity can be changed using the soap dispenser’s remote control.															
Refill	Easy to use refill button in order the soap will start to come out of the soap dispenser spout. This function can also be performed with the remote control.															
<table><tr><th colspan="2">OPTIONS</th></tr><tr><th>OPTION</th><th>CODE</th></tr><tr><td>Remote control</td><td>07100008</td></tr><tr><td>Matching battery-powered faucet</td><td>237801</td></tr><tr><td>Matching transformer-powered faucet</td><td>237800</td></tr><tr><td>6-pack: 6 soap dispensers and a remote control</td><td>Upon request</td></tr><tr><td>Multifeed system</td><td>Upon request</td></tr></table>			OPTIONS		OPTION	CODE	Remote control	07100008	Matching battery-powered faucet	237801	Matching transformer-powered faucet	237800	6-pack: 6 soap dispensers and a remote control	Upon request	Multifeed system	Upon request
OPTIONS																
OPTION	CODE															
Remote control	07100008															
Matching battery-powered faucet	237801															
Matching transformer-powered faucet	237800															
6-pack: 6 soap dispensers and a remote control	Upon request															
Multifeed system	Upon request															
<table><tr><td></td><td>Installation: Wall mounted concealed</td></tr><tr><td></td><td>Power source: 12 V transformer</td></tr><tr><td></td><td>Stern Soap & Water: Extreme WM matching faucet</td></tr><tr><td></td><td>Default soap dosage: 1.4 cc</td></tr><tr><td></td><td>Soap viscosity: 100-3800 cPs</td></tr></table>			Installation: Wall mounted concealed		Power source: 12 V transformer		Stern Soap & Water: Extreme WM matching faucet		Default soap dosage: 1.4 cc		Soap viscosity: 100-3800 cPs					
	Installation: Wall mounted concealed															
	Power source: 12 V transformer															
	Stern Soap & Water: Extreme WM matching faucet															
	Default soap dosage: 1.4 cc															
	Soap viscosity: 100-3800 cPs															
																

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

stern

SPARE PARTS LIST

Extreme CS SD E AISI316 (237890-316)

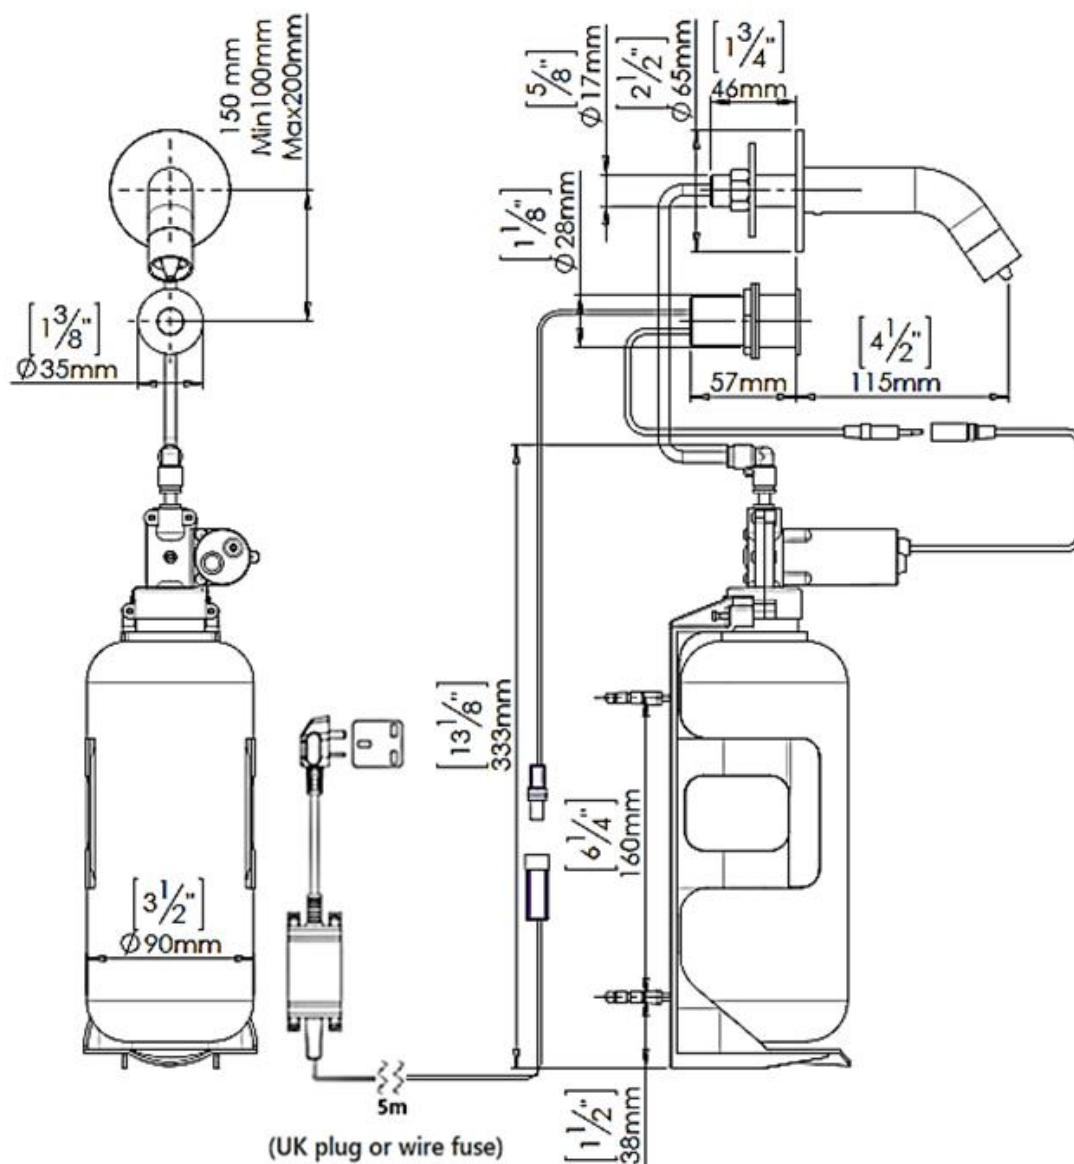

PVD Polished Brass



PVD Copper



PVD Satin Gold



Stainless Steel
AISI316 Material



Stainless Steel
(Brushed Nickel)



PVD Antique
Bronze



PVD Rose Gold



Matt Black

Note: In order to locate the relevant spare part, please check the corresponding parts and part number in the drawing. Minimum order quantity will be required.

* All information of the above is for the reference only. No prior notice is made if any changes.



TROUBLE SHOOTING

