



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET


Item Descriptions	GROHE (Germany) "Euphoria 110 Massage" Cool sunrise shower system mixer for wall mounting including hand shower (27221XXX) ; Nominal flow rate 9L/min in WELS Grade 1; Registration No. SB 19-0045
Dimensions	Height: 920mm
Model	27226GL1
Finish	Cool Sunrise
Manufacturer	GROHE Limited
Country of Origin	Germany
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing



Hand Shower

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l / min)	6.33	9.33	9.20	8.45	8.70

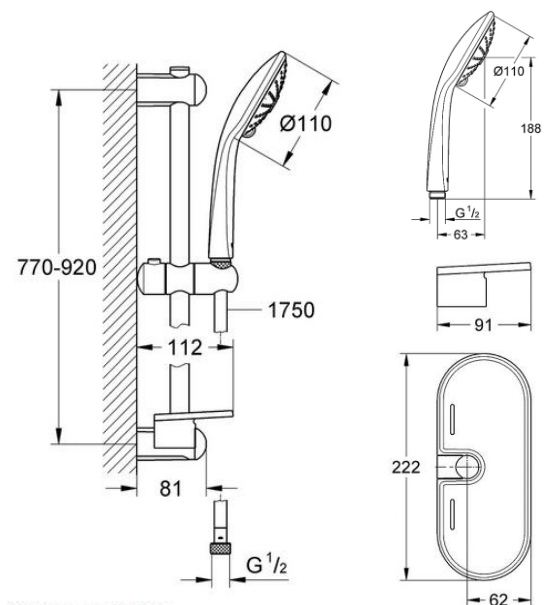

Colour options:

- 001 | StarLight Chrome
- DC1 | SuperSteel
- DA1 | Warm Sunset
- A01 | Hard Graphite
- AL1 | Brushed Hard Graphite
- GL1 | Cool Sunrise
- GN1 | Brushed Cool Sunrise
- DL1 | Brushed Warm Sunset
- BE1 | Polished Nickel
- EN1 | Brushed Nickel

"Euphoria 110 Massage" shower rail set 3 sprays, Cool Sunrise finish Rain, SmartRain and Massage Spray

Consisting of :
hand shower Massage (27 221 GL0)
shower rail 900 mm (27 500 GL0)
Silverflex shower hose 1750 mm (28 388 GL0)
GROHE EasyReach tray (27 596 000)

GROHE DreamSpray perfect spray pattern
GROHE StarLight finish
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE QuickFix (upper bracket adjustable to adapt to existing holes)
SpeedClean anti-limescale system
Inner WaterGuide for a longer life
Twistfree preventing the hose from twisting
suitable for instantaneous heater
min. recommended pressure 1 bar

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

"Euphoria 110 Massagex"

27221GL0


Hand shower 3 sprays

- Rain, Massage, SmartRain
- **GROHE DreamSpray** perfect spray pattern
- **GROHE SprayDimmer** (Stepless flow rate reduction)
- **GROHE StarLight** finish
- spray plate white
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- Universal Mounting System. Fits all standard shower hoses
- suitable for instantaneous heater
- min. recommended pressure 1 bar



Hand Shower

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l / min)	6.33	9.33	9.20	8.45	8.70

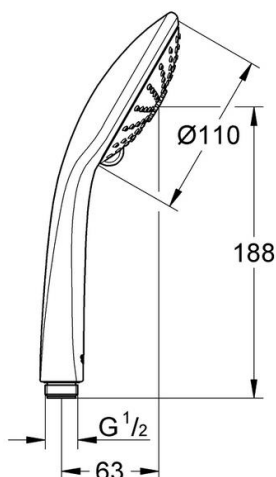


RAIN SPRAY

Wide and luxurious – a soft, delicate pattern to soothe the skin. Mimicking warm summer rain, the spray provides a full and even coverage.



SMARTRAIN SPRAY

All the features and benefits of our authentic Rain spray but with a reduced flow. A smart pattern that uses less water to deliver full showering enjoyment.

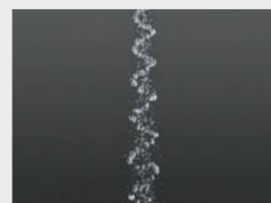

MASSAGE SPRAY

A pulsating spray pattern for a stimulating massage. Gives a unique and invigorating all-over massage.



Easy to clean thanks to the GROHE StarLight chrome coating

Just wipe the tap down with a dry cloth – the ultra smooth surface finish is scratch resistant and ensures a lasting luminous sheen. You'll save plenty of time cleaning while your tap always looks shiny and new.



SpeedClean – no limescale build-up on your shower head

Limescale is no longer an issue with our SpeedClean nozzles: thanks to the integrated anti-lime system, you will find the nozzles of your GROHE shower head super easy to clean. To remove any limescale residue from the flexible silicone nozzles, simply wipe them off with your hand.



Coating protected by Inner WaterGuide

A strong insulation of the water guide inside the shower prevents its surface from heating up, so it will never be too hot for you to touch. At the same time, this serves to protect the finish of your GROHE shower, further enhancing its great durability.


Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

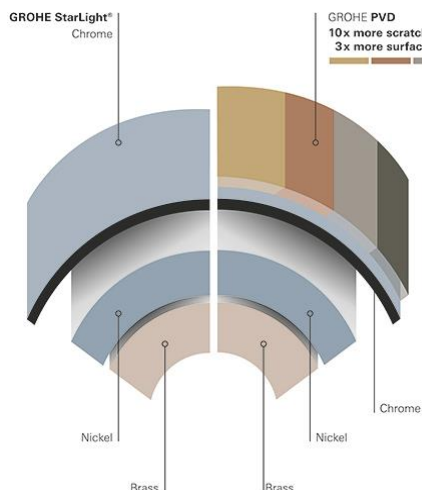


GROHE QuickFix Plus quick and easy installation in a few simple steps

Save time on the installation of your tap with GROHE QuickFix Plus. Consisting of fewer parts, our new system makes the installation process quicker and easier than ever.

"Silverflex" 28388GL0 Shower hose Twistfree 1750

- 1750 mm
- smooth surface for easy cleaning
- tensile strength 500 N
- pressure resistance up to 5 bar
- heat resistance 70°C
- AntiFold bendproof
- universal connection G 1/2" x 1/2"
- Rotation cone for **Twistfree** function
- **GROHE StarLight** finish
- **blister packaging**

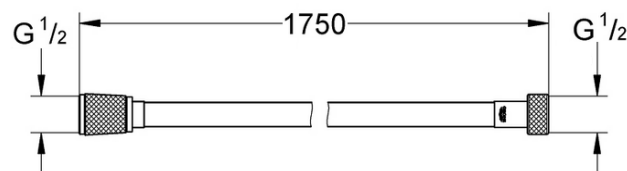

TwistFree – prevents your shower hose from twisting

TwistFree shower hoses are inspired by everyday experience: ever had to struggle with a twisted shower hose? TwistFree keeps your shower hose flexible and in shape, saving you that trouble.



28388000 GROHE EasyReach tray

- acrylic
- for Tempesta and Euphoria shower rails Ø 22 mm



GROHE EasyReach tray – always keep shower gel and shampoo handy

Always keep your shower gel and shampoo handy with the GROHE EasyReach tray. The flat tray surface is designed to match your tap for a great look and quick easy cleaning.



Note:

* All information of the above is for the reference only. No prior notice is made if any changes.




自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明
This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme :

牌子 / Brand	:	GROHE
型號 / Model	:	27221XXX + 409374040 ("XXX" denotes colour variants)
原產地 / Country or Region Origin	:	Germany

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:	 滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1
耗水量 <i>Water Consumption</i>	:	9 公升/分鐘 <i>litres/minute</i>

簽發日期:
Date of Issue: 9 July 2019

 水務署
Water Supplies Department



水務署署長(張業駒代行)
for Director of Water Supplies