

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Since 1949 Website: www.acmesanitary.com.hk



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions GROHE (Germany) "Grohtherm SmartControl" thermostat shower mixer with mixing device and adjustable temperature limiter with 3 valves; " Euphoria Cube Stick" chrome plated single function hand shower rail set; "Euphoria Cosmopolitan 160" chrome plated shower head; "Eurocube" bath spout; Nominal flow rate 9 L/min & 9.7 L/min in WELS Grade 1 & 2; Registration No. SB 17-0002 & SB 17-0030

Model 29126000 (Thermostat mixer)

35600000 (Mounting box)

27285000 + 27488000 (Shower head & arm)

27699000 (Hand Shower) 27892000 (Shower Rail) 28364000 (Shower Hose) 27704000 (Shower outlet elbow) 13303000 (Wall mounted spout)

Material Chrome Plated

Manufacturer **GROHE Limited**

Supplier Acme Sanitary Ware Co. Ltd

Mr. Eric Wong/ Mr. Don Yuen

Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012


E-mail acme@acmesanitary.com.hk Website www.acmesanitary.com.hk

Hand Shower

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (1/min)	5.30	8.70	9.20	9.20	9.10

Shower Head

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (1/min)	7.00	10.00	9.50	9.70	9.74

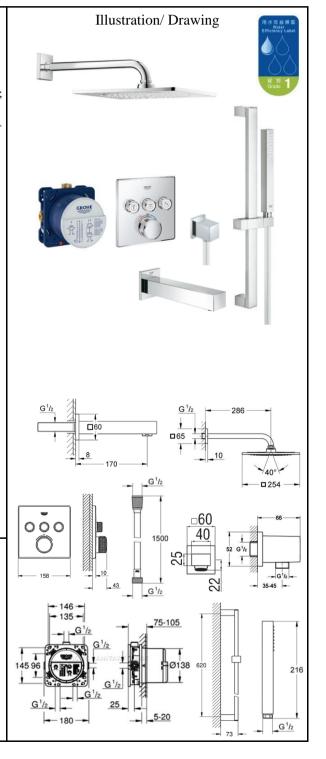

Note:

^{*} All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitarv.com.hk Since 1949 Website: www.acmesanitary.com.hk



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Grohtherm SmartControl

Thermostat for concealed installation with 3 valves

set for final installation for

GROHE Rapido SmartBox 35 600 000

metal wall escutcheon with GROHE QuickFix (covered escutcheon

and shaft sealing, covered fixing), retroactively 6° adjustable

GROHE StarLight chrome finish GROHE SmartControl push for ON-OFF, turn for volume

adjustment from EcoJoy to full flow

exchangeable symbols

GROHE TurboStat compact cartridge

with wax thermoelement

GROHE SafeStop safety button at 38°C

(calibration required)

GROHE SafeStop Plus optional temperature limiter at 43°C included

built-in non return valve

and dirt strainers

multiple outlets can be run simultaneously

without roughing-in-set

flow performance:

outlet $A = 23 \frac{1}{min}$ outlet B = 27 l/min

outlet C = 23 l/min

outlet A + B = 33 l/min

outlet $A + B + C = 36 \frac{1}{min}$

GROHE Rapido SmartBox

Universal rough-in box, 1/2"

3 outlets 1/2"

2 inlets below 1/2"

installation depth 75-105 mm

connection unit in DR brass

pre-mounted flushing plug


stable build-in box and protective cover

fixing options for solid walls and dry cladding

gasket

without set for final installation





Euphoria Cube

Shower rail, 620 mm

with wall holders, glide element and swivel holder

GROHE StarLight chrome finish

Euphoria Cube Stick

Hand shower 1 spray

Normal spray

GROHE EcoJoy 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE StarLight chrome finish

SpeedClean anti-limescale system

Inner WaterGuide for a longer life

Universal Mounting System. Fits all

standard shower hoses

Product description

Rainshower F-Series 10" 254 x 254

Consisting of:

Rain


head shower Rainshower F-Series 254 (27 285 000) 1 spray pattern:


Shower arm Rainshower 275 mm (27 488 000)

GROHE EcoJoy 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern GROHE StarLight chrome finish

SpeedClean anti-limescale system





□ 254

Euphoria Cube Shower outlet elbow, 1/2" male thread protected against backflow **GROHE StarLight** chrome finish

wall mounted


GROHE StarLight chrome finish

mousseur

blister pack


male thread 1/2" projection 170 mm

min. recommended pressure 1.0 bar



1500 mm flexible hose

smooth surface for easy cleaning tensile strength 500 N pressure resistance up to 5 bar heat resistance 70°C AntiFold bendproof universal connection G 1/2" x 1/2 Rotaflex for Twistfree-function GROHE StarLight chrome finish



Note:

^{*} All information of the above is for the reference only. No prior notice is made if any changes.

3 Key advantageous comparisons with another brand

1) Only 1 wall plate needed = Half expenditures



1 plate only

2) Integrated Volume Control



With Volume Control




3) Slim Design, shorter projection




10mm 43mm

Slim design up to 43mm

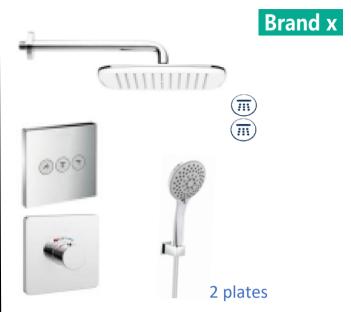



Without Volume Control



Thickness up to about 80mm

註冊號碼 (Registration No.): SB 17-0030



自願參與用水效益標籤計劃 - 沐浴花灑 Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明 This is to certify that



將下列花灑在本計劃內註冊:

has registered the following shower under this scheme:

牌 子 / Brand

GROHE

型 號 / Model

27285000

原產地 / Country or Region Origin

Germany

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

44

滴水點 Water droplet(s)

用水效益級別

Water Efficiency Grade

: 2

耗水量

Water Consumption

9.7

公升/分鐘 litres/minute

簽發日期: Date of Issue:

12 September 2017





水務署署長(周世威代行) for Director of Water Supplies 註冊號碼 (Registration No.): SB 17-0002



自願參與用水效益標籤計劃 - 沐浴花灑 Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明 This is to certify that

將下列花灑在本計劃內註冊: has registered the following shower under this scheme:

牌 子 / Brand

: GROHE

型 號 / Model

: 27699000

原產地 / Country or Region Origin

Germany

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

۵

滴水點 Water droplet(s)

用水效益級別

Water Efficiency Grade

: 1

耗水量

Water Consumption

: 9

公升/分鐘 litres/minute

簽發日期: Date of Issue:

18 January 2017





水務署署長(周世威代行) for Director of Water Supplies



Your ref.

水 務 署 Water Supplies Department

總部 Headquarters

七十打道七號人境事務大樓 48 樓

on Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔: 2 J m V 21/2022 T/J(948/2022) 來函檔號 * 01

電話 Tel.

傳真 Fax

: 2824 0578

8 September 2022

Approval of "GROHE" Thermostatic Mixer (General Acceptance No. C20220839)

Your letter ref. WRC/2767 dated 4 August 2022 refers.

Having considered the test report ref. J27901 issued on 11 July 2022 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

Grohe AG

Country of Origin:

Germany

Brand:

Grohe

Details of Fitting:

1/2" Thermostatic mixer

Model:

35600000 + 29126XXX

(where "XXX" denotes the code of colour)

Body Markings:

GROHE

Expiry Date:

19 June 2027





This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

"The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,

(YAU Hau Yin) for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue ME/MC] - with soft copy only