



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Neoperl (Germany) "Cascade" Water flow controller	Illustration/ Drawing
Model	40.1059.000	
Finish	Plastic	
Colour	Lime	<p style="text-align: center;">perfect stream quality</p>
Manufacturer	Neoperl	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong / Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

Size	Flow rate	Colour code	Insert only
STD	PCA 0.5 gpm max. (~1.9 l/min)	lime	40.1059.000


CASCADE® FEATURES

- superior lime protection
- extended life
- perfect stream quality
- very low noise level
- damage proof: unlike conventional wire mesh screens, the CASCADE® structure cannot be crushed
- integrated anti-clogging dome screen; filters sediments and particles



NEOPERL® AERATORS

- control the stream straightness and diameter
- reduce splash by aerating the stream and eliminating side spray
- save water and reduce energy costs
- meet local plumbing codes and standards

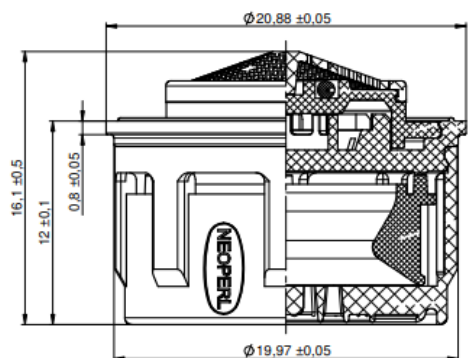

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

7 Gloucester Road, Wan Chai, Hong Kong



本署檔號
Our ref.
來函檔號
Your ref.

1/2021 T/J(87/2021)

電話
Tel.
傳真
Fax.

2824 0578

25 February 2021



Approval of "NEOPERL" Flow Controller (General Acceptance No. C20210160)

Your letter ref. 012-rkre dated 24 December 2020 refers.

Having considered the test report ref. J25784 issued on 10 November 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Neoperl GmbH
Country of Origin: Germany
Brand: Neoperl
Details of Fitting: Flow controller
Model: 40.1059.000
Body Markings: 
Expiry Date: 3 November 2025

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements.

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(Roger WONG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only