









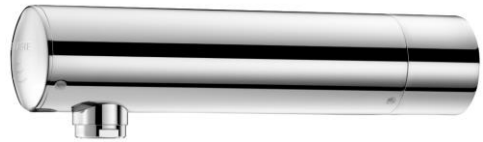

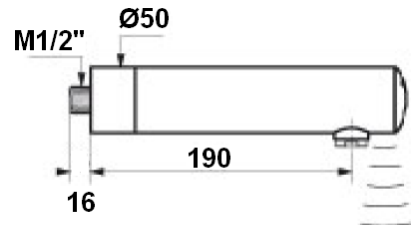









PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Delabie (France) Teipomic 3 electronic wall mounted tap with 6V Lithium batteries	Illustration/ Drawing												
Model	443006													
Material/ Finish	Chrome Plated													
Manufacturer	Delabie (France)													
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen													
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012													
E-mail	acme@acmesanitary.com.hk													
Website	www.acmesanitary.com.hk													
<p>Wall-mounted electronic basin tap: Battery-operated with integrated 123 6V Lithium batteries. Reduced-stagnation solenoid valve and electronic unit integrated into the body of the tap. Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 - 6 lpm. Scale-resistant flow straightener. Duty flush (~60 seconds every 24 hours after last use). Active, infrared presence detection, sensor at the end of the spout optimises detection. Chrome-plated solid brass body. Cap fixed in place by 2 concealed screws, with pictogram to identify the sensor easily. Wall-mounted, M1/2". Ø 50mm, L. 190mm. Anti-blocking security.</p>														
<h3>TECHNICAL FEATURES</h3> <p>TEMPOMATIC 3 electronic tap - Ref. 443006</p> <table><tr><td>Supply</td><td>6V battery</td></tr><tr><td>Connector</td><td>M1/2"</td></tr><tr><td>Technology</td><td>Electronic</td></tr><tr><td>Spout length</td><td>190mm</td></tr><tr><td>Flow rate</td><td>3 lpm</td></tr><tr><td>Standards and certifications</td><td>   </td></tr></table>		Supply	6V battery	Connector	M1/2"	Technology	Electronic	Spout length	190mm	Flow rate	3 lpm	Standards and certifications	   	<h3>ADVANTAGES</h3> <div><div></div><div>Batteries integrated into the body of the tap</div></div> <div><div></div><div>Water savings up to 90%</div></div> <div><div></div><div>Total hygiene: no manual contact</div></div> <div><div></div><div>Anti-bacterial proliferation duty flush</div></div>
Supply	6V battery													
Connector	M1/2"													
Technology	Electronic													
Spout length	190mm													
Flow rate	3 lpm													
Standards and certifications	   													

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.