




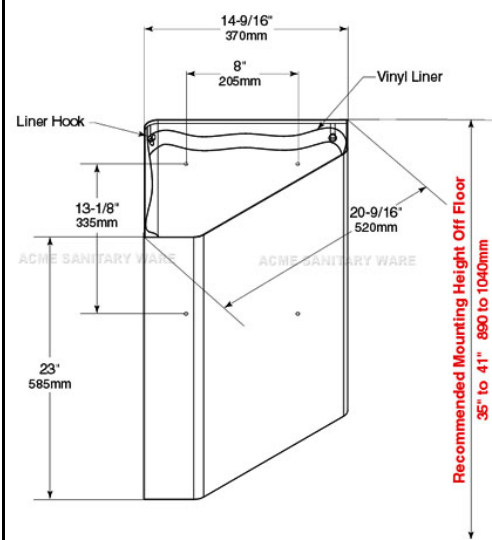
# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
Email: acme@acmesanitary.com.hk  
Website: www.acmesanitary.com.hk



|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

## SANITARY WARE SPECIFICATION SHEET

|   |  |  |
|---|--|--|
| Item Descriptions   | Bobrick (USA) Stainless steel surface-mounted corner waste receptacle                    | Illustration/ Drawing  |
| Dimensions  | W521 x L321 x H584 mm  |  |
| Model   | B-268  |  |
| Material/ Finish  | Stainless Steel  |  |
| Manufacturer  | Bobrick Washroom Equipment Inc. (USA)  |  |
| Supplier  | Acme Sanitary Ware Co. Ltd<br>Mr. Eric Wong/ Mr. Don Yuen                                |  |
| Contact Tel/Fax<br>E-mail<br>Website  | (852) 2388-7171 / (852) 2710-8012<br>acme@acmesanitary.com.hk<br>www.acmesanitary.com.hk |  |
| <b>MATERIALS:</b><br><b>Receptacle</b> — 18-8, type 304, 22 gauge (0.8mm) stainless steel with exposed surfaces satin finish. All-welded construction. Top and bottom edges hemmed. Equipped with three spot-welded interior hooks and two hooks adhered to the front for attaching the vinyl liner.<br><b>Liner</b> — Heavy-gauge vinyl liner part no. 268-14 attaches to receptacle at five points through heat sealed grommet holes and is removable for servicing.                                |  |  |
| <b>OPERATION:</b><br>Open top, wall-mounted corner waste receptacle has removable vinyl liner for easy servicing. Capacity: 1.8 cu. ft. (13.4 gallons).   |  |  |
| <b>INSTALLATION:</b><br>Surface-mounted on wall through 4 mounting holes on sides of unit. For installation on stud walls, secure with toggle bolts. For installation on solid walls, use rawl plugs or expansion bolts (not furnished by manufacturer).  |  |  |
| <b>SPECIFICATION:</b><br>Surface-mounted corner waste receptacle shall be constructed of type 304, 22 gauge (0.8mm) stainless steel with all-welded construction; exposed surfaces shall have satin finish. Top and bottom edges shall be hemmed for safety. Waste receptacle shall have three spot-welded interior hooks and two hooks adhered to the front for attaching the vinyl liner. Waste receptacle shall have a capacity of 1.8 cu. ft. (13.4 gallons) and be furnished with a vinyl liner. |  |  |

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.