



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

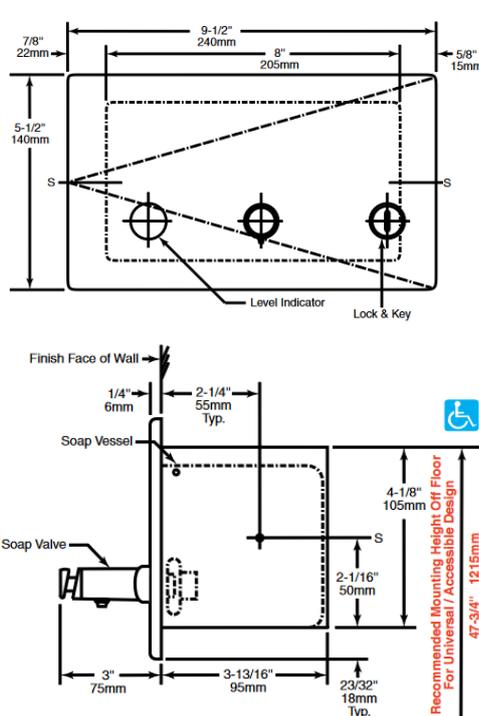
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p><b>Model</b></p> <p><b>Material/ Finish</b></p> <p><b>Manufacturer</b></p> <p><b>Supplier</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p>	<p>Bobrick (USA) "Trimline Series" Recessed soap dispenser with soap vessel</p> <p>B-306</p> <p>Stainless Steel/ Satin</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen (852) 2388-7171 / (852) 2710-8012 acme@acmesanitary.com.hk www.acmesanitary.com.hk</p>	<p><b>Illustration/ Drawing</b></p>  <div data-bbox="1209 1048 1444 1187" style="border: 1px solid black; padding: 5px;"> <p><b>Rough Wall Opening</b> 8-3/8" (210mm) wide 4-3/8" (110mm) high 3-7/8" (98mm) minimum recessed depth</p> </div>
<p><b>MATERIALS:</b></p> <p><b>Recessed Mounting Box</b> — 18-8, Type-304 stainless steel. All-welded construction. Completely enclosed.</p> <p><b>Door</b> — 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish. 1/4" (6mm) 90° return edges for maximum rigidity. Secured to mounting box with a concealed stainless steel piano-hinge. Equipped with a polycarbonate refill-indicator window and a tumbler lock keyed like other Bobrick washroom accessories.</p> <p><b>Soap Vessel</b> — Molded plastic. Large opening equipped with plastic cover. Capacity: 45-fl oz (1.3-L).</p> <p><b>Soap Valve</b> — Valve mechanism with O-ring seals. Stainless steel inner spring and spout. Chrome-plated brass housing.</p> <p><b>OPERATION:</b></p> <p>Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Valve operates with one hand, without tight grasping, pinching, or twisting of the wrist, and with less than 5 pounds of force (22.2 N) to comply with accessible design (including ADAAG in U.S.A.). Window indicates when refilling is required. Door secured to mounting box unlocks with key provided and swings open 90° for filling without removing from wall.</p> <p><b>INSTALLATION:</b></p> <p>Provide framed rough wall opening 8-3/8" wide by 4-3/8" high (210 x 110mm). Minimum recessed depth required from finish face of wall is 3-7/8" (98mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with screws furnished by manufacturer.</p> <p>Note: Place unit as close to top of deck of lavatory as plumbing vent code will permit and with bottom of door high enough to clear fixture trim.</p> <p><b>SPECIFICATION:</b></p> <p>Recessed soap dispenser, including mounting box shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Valve shall be operable with one hand and with less than 5 pounds of force (22.2 N) to comply with accessible design (including ADAAG in U.S.A.). Door shall have molded plastic soap container with plastic cap attached to back, equipped with a soap refill-indicator window and tumbler lock keyed like other Bobrick washroom accessories, and shall have concealed stainless steel piano-hinge. Corrosion-resistant valve shall dispense commercially marketed all-purpose hand soaps, non-iodine based soaps and do not use alcohol based sanitisers. Soap vessel shall have a capacity of 45-fl oz (1.3-L).</p>		 <p>Technical drawing showing dimensions for the soap dispenser:</p> <ul style="list-style-type: none"> <li>Top width: 9-1/2" (240mm)</li> <li>Bottom width: 8" (205mm)</li> <li>Right side depth: 5/8" (15mm)</li> <li>Left side depth: 7/8" (22mm)</li> <li>Height: 5-1/2" (140mm)</li> <li>Mounting box depth: 2-1/4" (55mm Typ.)</li> <li>Recessed depth: 3-7/8" (98mm)</li> <li>Recommended mounting height off floor: 47-3/4" (1215mm)</li> <li>Other dimensions: 2-1/16" (50mm), 23/32" (18mm Typ.), 3-13/16" (95mm), 3" (75mm), 1/4" (6mm)</li> </ul>

\* All information of the above is for the reference only. No prior notice is made if any changes.