



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


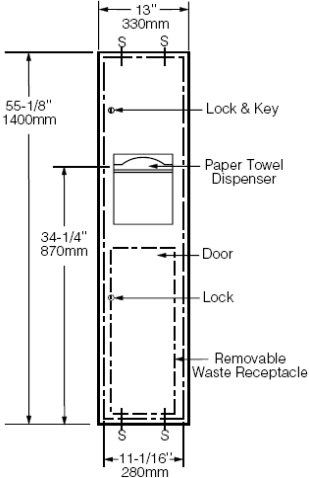
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) "Trimline Series" Semi-recessed paper towel dispenser & waste receptacle	<div>Illustration/ Drawing</div> <div></div> <div><div>BOBRICK</div><div><div>Rough Wall Opening</div><div>11-1/2" (292mm) wide</div><div>53-5/8" (1362mm) high</div><div>3-3/4" (95mm) minimum recessed depth</div></div></div> <div></div>
Model	B-38032	
Material/ Finish	Heavy-gauge stainless steel	
Manufacturer	Bobrick Washroom Equipment Inc. (USA)	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
<p><b>MATERIALS:</b></p> <p><b>Cabinet</b> — 18-8, type-304, heavy-gauge stainless steel. All-welded construction.</p> <p><b>Door</b> — 18-8, type-304, 18-gauge (1.2mm) stainless steel with satin-finish. 9/16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Tumbler locks flush with the door - no protrusion.</p> <p><b>Skirt</b> — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin-finish.</p> <p><b>Paper Towel Dispenser</b> — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Rounded towel tray has hemmed opening to dispense paper towel without tearing. Capacity: 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling for ward out when door is opened for servicing.</p> <p><b>TowelMate® Towel Rod Assembly</b> — Consisting of a round Nylon Rod and (2) stainless steel Rod Screws for attachment, is field replaceable. Stainless steel Stop Screws (2) lock TowelMate Rod assembly in place. To retrofit TowelMate into existing install units manufactured prior to Feb. 2021, order TowelMate Accessory Bobrick Model No. 3803-130.</p> <p><b>Waste Container</b> — Leakproof, rigid molded plastic. Removable for servicing. Capacity: 6.3-gal. (24-L).</p> <p><b>OPERATION:</b></p> <p>Paper towel dispenser is adjustable to dispense C-fold, multifold, or singlefold paper towels without use of additional adapters or towel trays. To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.</p> <p><b>INSTALLATION:</b></p> <p>Provide framed rough wall opening 11-1/2" wide x 53-5/8" high (292 x 1362mm). Minimum recessed depth required from finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished).</p> <p><b>SPECIFICATION:</b></p> <p>Semi-recessed paper towel dispenser and waste receptacle shall be type-304 stainless steel; all-welded construction. Exposed surfaces shall have satin finish. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling for ward out when door is opened for servicing and a Nylon Rod across the center of the towel tray to dispense paper towels one at a time. Door with 9/16" (14mm) 90° return shall be secured to cabinet with a concealed, full-length, stainless steel piano-hinge and equipped with a stainless steel cable door-swing limiter and two tumbler locks. Tumbler locks flush with the door - no protrusion. Paper towel dispenser shall be capable of dispensing 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Waste receptacle shall be furnished with a removable, leakproof, rigid molded plastic waste-container with a capacity of 6.3-gal. (24-L).</p>		

\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.