



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

<p><b>Item Descriptions</b></p> <p><b>Dimensions</b></p> <p><b>Model</b></p> <p><b>Finish</b></p> <p><b>Material</b></p> <p><b>Manufacturer</b></p> <p><b>Supplier</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p>	<p>Bobrick (USA) "TrimLineSeries" Recessed paper towel dispenser &amp; waste receptacle</p> <p>L330 x W95 x H1400 mm</p> <p>B-38034.MBLK</p> <p>Matte Black</p> <p>Stainless Steel</p> <p>Bobrick Washroom Equipment Inc. (USA)</p> <p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung (852) 2388-7171 / (852) 2710-8012 acme@acmesanitary.com.hk www.acmesanitary.com.hk</p>	<p><b>Illustration/ Drawing</b></p> <p><b>Rough Wall Opening</b> 11-1/2" (290mm) wide 53-5/8" (1360mm) high 3-3/4" (95mm) minimum recessed depth</p> <p>Labels in diagram: TowelMate Towel Guide Bracket Return, Flush Lock &amp; Key, Paper Towel Dispenser, TowelMate Towel Rod, Door, Flush Lock, Removable Waste Receptacle, Finish Face of Floor.</p> <p>Dimensions in diagram: 13" (530mm), 55-1/8" (1400mm), 34-1/4" (870mm), 12-11/16" (322mm), 11" (280mm), 3-5/8" (92mm), 53-3/16" (1350mm), 1-3/4" (45mm), 9/16" (14mm).</p> <p>Accessibility notes: Recommended Mounting Height Off Floor 69" to 76" (1755 to 1930mm), Recommended Mounting Height Off Floor For Accessible Design 59-3/4" (1520mm).</p>
<p><b>MATERIALS:</b></p> <p><b>Cabinet</b> — 18-8 S, type-304, heavy-gauge stainless steel. All-welded construction.</p> <p><b>Door</b> — 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish or matte black, as specified. 9/16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Tumbler locks flush with the door - no protrusion.</p> <p><b>Paper Towel Dispenser</b> — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish or matte black, as specified. Rounded towel tray has hemmed opening to dispense paper towel without tearing. Capacity: 600 C-fold or 800 multifold paper towels. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward out when door is opened for servicing.</p> <p><b>TowelMate® Towel Rod Assembly</b> — Consisting of a round Nylon Rod and (2) stainless steel Rod Screws for attachment, is field replaceable. Stainless steel Stop Screws (2) lock TowelMate Rod assembly in place. To retrofit TowelMate into existing install units manufactured prior to Feb. 2021, order TowelMate Accessory Bobrick Model No. 3944-130.</p> <p><b>Waste Container</b> — Leak-proof rigid molded plastic. Removable for servicing. Capacity: 3.8-gal. (14.4-L).</p>		

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

### OPERATION:

Paper towel dispenser is adjustable to dispense C-fold, multifold, or singlefold paper towels without use of additional adapters or towel trays. To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.


### INSTALLATION:

Provide framed rough wall opening 11-1/2" wide x 53-5/8" high (292 x 1362mm). Minimum recessed depth required from finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall.

Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished).

### SPECIFICATION:

Recessed paper towel dispenser and waste receptacle shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall be satin-finish. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling for ward out when door is opened for servicing and a Nylon Rod across the center of the towel tray to dispense paper towels one at a time. Door shall be 18 gauge (1.2mm); have 9/16" (14mm) 90° return edges; be secured to cabinet with a concealed, full-length stainless steel piano-hinge; and equipped with a stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Tumbler locks flush with the door - no protrusion. Paper towel dispenser shall dispense 600 C-fold or 800 multifold paper towels. Waste receptacle shall be furnished with a removable, leak-proof, rigid molded plastic waste-container with a capacity of 3.8-gal. (14.4-L).

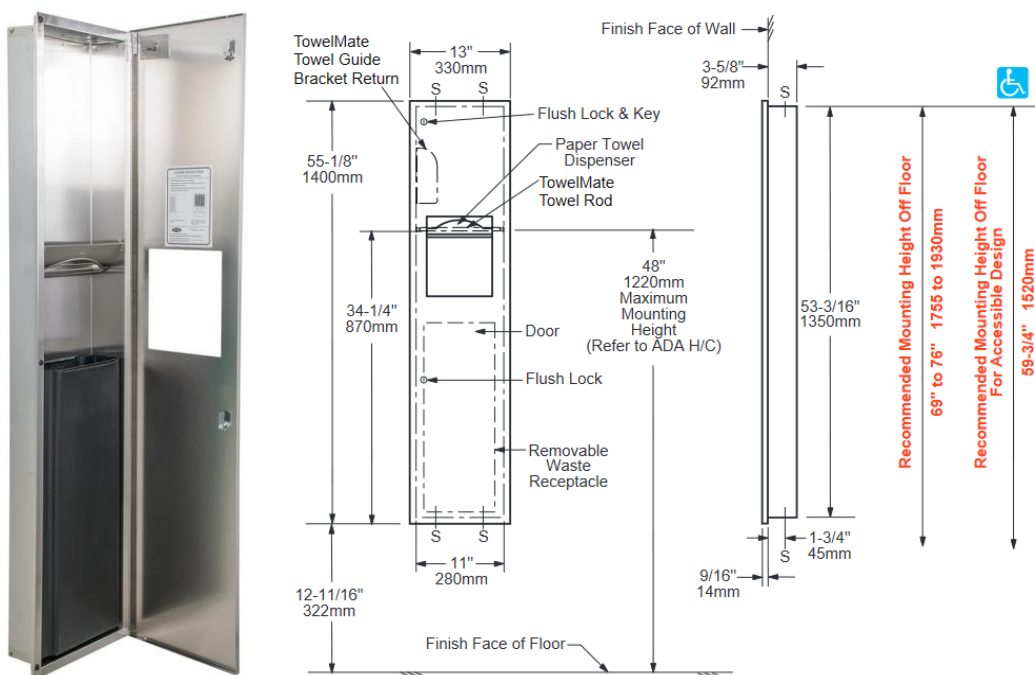

### Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.