

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitarv.com.hk Since 1949 Website: www.acmesanitary.com.hk

American Standard

Illustration/ Drawing

| PROJECT | REF | REV | ITEM CODE | |
|----------|------|-----|--------------|--|
| LOCATION | DATE | | PAGE | |

SANITARY WARE SPECIFICATION SHEET

Item Descriptions American Standard (PRC) "Acacia

> Evolution" Chrome plated high spout basin mixer; nominated flow rate 7.1 L/min in WELS Grade 2; Registration No. TM 18-

0171

Dimensions High: 180mm

CF-1305.101.50 Model

Material/Finish Brass / Chrome Plated

Manufacturer American Standard (PRC)

Source Acme Sanitary Ware Co. Ltd

Mr. Eric Wong/ Mr. Don Yuen

Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012

E-mail acme@acmesanitary.com.hk Website www.acmesanitary.com.hk

| Dynamic flow pressure (kPa) | 50 | 150 | 250 | 350 | 500 |
|-----------------------------|------|------|------|------|------|
| Flow rate (1/min) | 3.65 | 6.50 | 7.35 | 7.30 | 7.70 |

· Water Saving:

Conserving water is as important to us as it is to you.

It makes ecological and economical sense. After all, the less water you use, the better future we have

Ceramic Disc Cartridge:

American Standard patents its ceramic disc valve technology which keeps faucets drip-free with smooth handle performance for a lifetime of use

Design Philosophy:

American Standard products are designed to express the uniqueness of your personality. Our design philosophy focuses on total relaxation, maximum utility and technological innovations.



PROVIDES UP TO 30% ENERGY SAVINGS

Unlike conventional mixers, Acacia Evolution's Eco Handle releases cold water instead of warm water upon lifting the lever. This saves you precious energy as it prevents the boiler from heating up, resulting up to 30% energy savings. To get hot water, you only need to move the lever to the left.



PREVENTS WATER WASTAGE

By providing a resistance midway when lifting the lever, this technology gives you better water volume control, saving you precious water







1.00 0.00


100


200

300 Dynamic flow pressure (kPa)

GOOD DESIGN

AWARD 2014

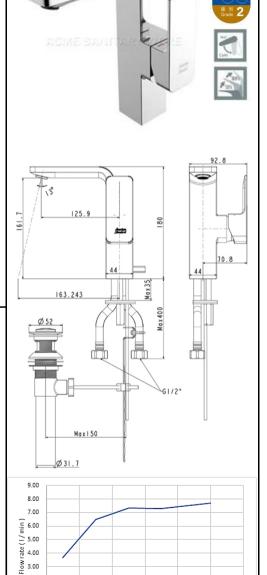





自願參與用水效益標籤計劃-水龍頭 Voluntary Water Efficiency Labelling Scheme - Water Taps





茲證明 This is to certify that

將下列水龍頭在本計劃內註冊: has registered the following water tap under this scheme:

/ Brand

American Standard

/ Model

WF-1305.101.50

/ Type

Mixing

/ Country or Region Origin 原產地

China

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

滴水點

Water droplet(s)

用水效益级别

Water Efficiency Grade

2

耗水量

Water Consumption

7.1

公升/分縮 litres/minute

簽發日期: Date of Issue:

13 July 2018

Water Supplies Department



水務署署長(周世威代行) for Director of Water Supplies



水務署 Water Supplies Department

總部 Headquarters

香港灣77生七打道七號入境事務大樓 48 樓

Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 Our ref. 來函檔號



023 T/J(1130/2023)

電話

Tel.

傳真

: 2824 0578

18 December 2023



Approval of "AMERICAN STANDARD" Basin Mixer (General Acceptance No. C20230933)

Your E-Application [file-id: ETJ-GA-20230705-76] dated 9 November 2023 and subsequent submission received by this department on 21 November 2023 refer.

Having considered the test report ref. 222320PC220197A issued on 6 December 2022 by Fugro Technical Services Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

Jiangmen LIXIL AS Sanitary Fitting Manufacturing Co

Country of Origin:

the Mainland of China

Brand:

American Standard

Details of Fitting:

1/2" Single lever basin mixer

Model:

CF-1305.101.50

Body Markings:

American Standard





Expiry Date:

25 August 2027

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue ME/MC] - with soft copy only