




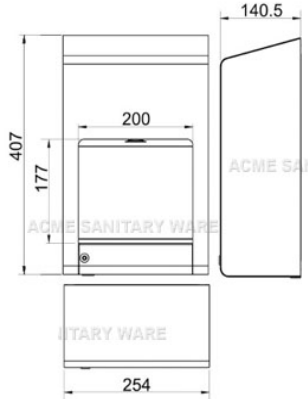
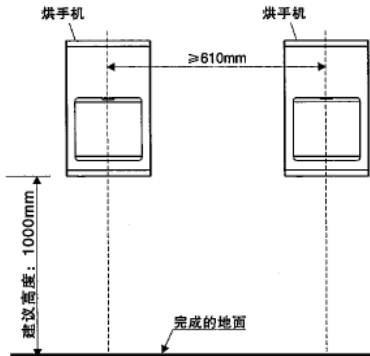
Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk

American Standard

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) Stainless Steel High Speed (rpm 30,000) Hand Dryer with tray and IPX1 water proof cover in silver finish	Illustration/ Drawing 																																																		
Dimensions	L254 x W141 x H407 mm																																																			
Model	CF-8019.000.99																																																			
Material/Colour	Stainless Steel / Silver																																																			
Manufacturer	American Standard (PRC)																																																			
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung																																																			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																																			
E-mail	acme@acmesanitary.com.hk																																																			
Website	www.acmesanitary.com.hk																																																			
Features:																																																				
Maximum speed reaches 90m/s																																																				
Quick drying time																																																				
Low energy consumption																																																				
Less noisy																																																				
Environmental friendly																																																				
Compact size																																																				
Stainless steel durable case																																																				
	<table><tr><th colspan="2">规格及功能表</th></tr><tr><th>项目</th><th>形式</th></tr><tr><td>使用方式</td><td>红外线感应</td></tr><tr><td>工作电压</td><td>220V±15%, 50Hz</td></tr><tr><td>功率 (W)</td><td>1000, 出厂设置600</td></tr><tr><td>待机功率 (W)</td><td>≤0.5</td></tr><tr><td>环境温度 (℃)</td><td>-10~50</td></tr><tr><td>开启时间 (S)</td><td>≤0.6</td></tr><tr><td>关闭时间 (S)</td><td>≤2</td></tr><tr><td>感应距离 (CM)</td><td>5~30, 出厂设置18</td></tr><tr><td>暖风温度 (℃)</td><td>35~65</td></tr><tr><td>工作噪音 (db)</td><td>≤75</td></tr><tr><td>防水等级</td><td>IPX1</td></tr><tr><td>外壳材质</td><td>不锈钢</td></tr><tr><td>电热功率 (W)</td><td>175~580</td></tr><tr><td>电热温度开关 (℃)</td><td>温度开关85</td></tr><tr><td>马达功率 (W)</td><td>125~420</td></tr><tr><td>马达温度开关 (℃)</td><td>温度开关105</td></tr><tr><td>R.P.M</td><td>30000 (50Hz)</td></tr><tr><td>风速 (m/sec)</td><td>50~90, 出厂设置70 (50Hz)</td></tr><tr><td>风量 (m³/h)</td><td>91.3</td></tr><tr><td>连续运转保护 (sec)</td><td>60</td></tr><tr><td>外观尺寸 (mm)</td><td>407x254x140.5</td></tr><tr><td>包装尺寸 (mm)</td><td>437x312x194</td></tr><tr><td>机台重量 (kgs)</td><td>7.0</td></tr></table>	规格及功能表		项目	形式	使用方式	红外线感应	工作电压	220V±15%, 50Hz	功率 (W)	1000, 出厂设置600	待机功率 (W)	≤0.5	环境温度 (℃)	-10~50	开启时间 (S)	≤0.6	关闭时间 (S)	≤2	感应距离 (CM)	5~30, 出厂设置18	暖风温度 (℃)	35~65	工作噪音 (db)	≤75	防水等级	IPX1	外壳材质	不锈钢	电热功率 (W)	175~580	电热温度开关 (℃)	温度开关85	马达功率 (W)	125~420	马达温度开关 (℃)	温度开关105	R.P.M	30000 (50Hz)	风速 (m/sec)	50~90, 出厂设置70 (50Hz)	风量 (m³/h)	91.3	连续运转保护 (sec)	60	外观尺寸 (mm)	407x254x140.5	包装尺寸 (mm)	437x312x194	机台重量 (kgs)	7.0	
规格及功能表																																																				
项目	形式																																																			
使用方式	红外线感应																																																			
工作电压	220V±15%, 50Hz																																																			
功率 (W)	1000, 出厂设置600																																																			
待机功率 (W)	≤0.5																																																			
环境温度 (℃)	-10~50																																																			
开启时间 (S)	≤0.6																																																			
关闭时间 (S)	≤2																																																			
感应距离 (CM)	5~30, 出厂设置18																																																			
暖风温度 (℃)	35~65																																																			
工作噪音 (db)	≤75																																																			
防水等级	IPX1																																																			
外壳材质	不锈钢																																																			
电热功率 (W)	175~580																																																			
电热温度开关 (℃)	温度开关85																																																			
马达功率 (W)	125~420																																																			
马达温度开关 (℃)	温度开关105																																																			
R.P.M	30000 (50Hz)																																																			
风速 (m/sec)	50~90, 出厂设置70 (50Hz)																																																			
风量 (m³/h)	91.3																																																			
连续运转保护 (sec)	60																																																			
外观尺寸 (mm)	407x254x140.5																																																			
包装尺寸 (mm)	437x312x194																																																			
机台重量 (kgs)	7.0																																																			

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.