



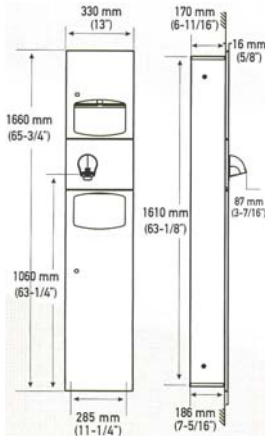


## Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
E-mail: acme@acmesanitary.com.hk  
Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

# SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Multi-purpose cabinets, stainless steel AISI 304 satin finish	<div>Illustration/ Drawing</div> <div></div> <div></div> <div><table><tr><td>C-fold towel capacity</td><td>300 units</td></tr><tr><td>Z-fold towels capacity</td><td>500 units</td></tr><tr><td>Towels</td><td>100 x 260 mm max.</td></tr><tr><td>Voltage</td><td>220 - 240 V</td></tr><tr><td>Frequency</td><td>50/60 Hz</td></tr><tr><td>Electrical isolation</td><td>Class I</td></tr><tr><td>Consumption</td><td>10 A</td></tr><tr><td>Effective airflow</td><td>330 m³/h 5500 l/min</td></tr><tr><td>Air velocity</td><td>96 Km/h</td></tr><tr><td>Drying time</td><td>29 sec</td></tr><tr><td>Total power</td><td>2250 W</td></tr><tr><td>Motor</td><td>250 W</td></tr><tr><td>Heating element</td><td>2000 W</td></tr><tr><td>RPM</td><td>5500</td></tr><tr><td>Air temperature</td><td>53 °C (at 10 cm distance at 21°C)</td></tr><tr><td>Noise level (at 2 m)</td><td>70 dB</td></tr><tr><td>Weight (empty)</td><td>21.85 Kg</td></tr><tr><td>Recommended installation height</td><td>10 - 15 cm</td></tr></table></div> <div></div>	C-fold towel capacity	300 units	Z-fold towels capacity	500 units	Towels	100 x 260 mm max.	Voltage	220 - 240 V	Frequency	50/60 Hz	Electrical isolation	Class I	Consumption	10 A	Effective airflow	330 m³/h 5500 l/min	Air velocity	96 Km/h	Drying time	29 sec	Total power	2250 W	Motor	250 W	Heating element	2000 W	RPM	5500	Air temperature	53 °C (at 10 cm distance at 21°C)	Noise level (at 2 m)	70 dB	Weight (empty)	21.85 Kg	Recommended installation height	10 - 15 cm
C-fold towel capacity	300 units																																					
Z-fold towels capacity	500 units																																					
Towels	100 x 260 mm max.																																					
Voltage	220 - 240 V																																					
Frequency	50/60 Hz																																					
Electrical isolation	Class I																																					
Consumption	10 A																																					
Effective airflow	330 m³/h 5500 l/min																																					
Air velocity	96 Km/h																																					
Drying time	29 sec																																					
Total power	2250 W																																					
Motor	250 W																																					
Heating element	2000 W																																					
RPM	5500																																					
Air temperature	53 °C (at 10 cm distance at 21°C)																																					
Noise level (at 2 m)	70 dB																																					
Weight (empty)	21.85 Kg																																					
Recommended installation height	10 - 15 cm																																					
Dimensions	L330 x H1660 x W186mm																																					
Model	DTES0040CS																																					
Material/ Finish	Stainles Steel/ Satin Finish																																					
Manufacturer	Mediclinics, S.A. (Spain)																																					
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung																																					
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																					
E-mail	acme@acmesanitary.com.hk																																					
Website	www.acmesanitary.com.hk																																					
<b>Components and Materials</b> <ul style="list-style-type: none"><li>Stainless steel AISI 304 body, 0.8mm thick, satin finish. Completely welded construction.</li><li>Stainless steel AISI 304 one-piece door, 1.2mm thick, satin finish Secured to cabinet with a full-length stainless steel piano-hinge. Equipped with two locks anti-vandal keyed.</li><li>Stainless steel AISI 304 paper towel dispenser, 0.8mm thick, satin finish. Rounded towel tray has hemmed opening to dispenser towels without tearing. Suitable for C-fold or multifold paper towels.</li><li>Stainless steel AISI 304 waste receptacle, 0.8mm thick. Capacity: 17.2L</li></ul>																																						
Note:																																						

## Illustration/ Drawing



mediclinics

C-fold towel capacity	300 units
Z-fold towels capacity	500 units
Towels	100 x 260 mm max.
Voltage	220 - 240 V
Frequency	50/60 Hz
Electrical isolation	Class I
Consumption	10 A
Effective airflow	330 m <sup>3</sup> /h 5500 l/min
Air velocity	96 Km/h
Drying time	29 sec
Total power	2250 W
Motor	250 W
Heating element	2000 W
RPM	5500
Air temperature	53 °C (at 10 cm distance at 21°C)
Noise level (at 2 m)	70 dB
Weight (empty)	21.85 Kg
Recommended installation height	10 - 15 cm

