# Acme Sanitary Ware Co Ltd Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www. acmesanitaryware.com.hk

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions Mediclinics "Mediflow®" (Spain) Steel

wall-mounted hand dryer sensor operated in

matte black epoxy finish

Dimensions L275 x W164 x H325 mm

Model M02AB

Material/ Finish Steel / Matte Black Epoxy Finish

Manufacturer Mediclinics, S.A. (Spain)

Supplier Acme Sanitary Ware Co. Ltd

Mr. Eric Wong/ Mr. Don Yuen

Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012

E-mail acme@acmesanitary.com.hk Website www.acmesanitary.com.hk

#### General description

- Mediflow® Logic Dry hand dryers automatically operated are characterized by their power and ruggedness. They incorporate the technology to automatically regulate the temperature of the outlet air to 4 possible levels depending on the room temperature. Thanks to this device, which is assembled into the LED Electronic Circuit, these dryers enjoy a longer life cycle, while increasing the effectiveness of the hand drying process. Also relevant is the savings in electrical energy consumption of these dryers, which incorporate this very important ecologic feature.
- Mediflow® Logic Dry dryers are made according to the highest quality and safety standards: it includes safety thermal limiters (in the heating element and in the motor) and automatic disconnect system.
- Mediflow® solutions are proven long lasting and completely reliable models. Versatile hand dryers with anti-vandalism features and designed to be installed in areas with a large traffic of people such as: airports, large hotels, sports centers, large recreational areas and official organizations among others.

#### Components & materials:

- · M02A: Steel one-piece cover, white Epoxy painted, 1.5mm. thick.
- M02AB: Steel one-piece cover, black matte Epoxy painted, 1.5mm. thick.
- · M02AC: Stainless steel one-piece cover, bright finish, 1.5mm. thick.
- · M02ACS: Stainless steel one-piece cover, satin finish, 1.5mm. thick.



M02A White epoxy finish




M02AB Matte black epoxy finish




M02AC Bright finish



M02ACS Satin finish









Technical Specifications
--------------------------

Voltage	220- 240 V							
Frequency	50/60 Hz							
Electrical Isolation	Class II							
Total power	250 – 2,750 W							
Consumption	1.2 - 12A							
Motor power	250 W							
Rpm	4,500							
Heating element power	2,500 W							
Dimensions	325x275x164 mm.							
Weight	4.25 Kg							
Cover thickness	1.5 mm							
Drying time	29 sec.							
Effective airflow	450 m <sup>3</sup> /h (7,500 L/min)							
Air velocity	95 Km/h							
Air temperature (10 cm distance/21°C)	50 °C							
Sound pressure (*) (at 2m)	65 dBA							
Protection rating	IP23							
(*) According to UNE EN ISO 11201:2010 V2 standard.								

Note:









# **Acme Sanitary Ware Co Ltd**



Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 E-mail: acme@acmesanitary.com.hk Website: www. acmesanitaryware.com.hk

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET


#### Components & materials:

- · Fire resistant plastic PA 6 V0 base and fan scroll, with 4 Ø 8 mm holes for wall mounting. It includes silent-blocks to damp mechanical vibrations.
- · Universal brush motor, 4,500 rpm, F class, which includes a safety thermal cut-off.
- · Aluminium centrifugal double asymmetrical inlet fan wheel.
- · Waved wire NiCr heating element on a mica frame that incorporates a thermal cut-off.
- · Automatic regulation of air temperature on ambient temperature.
- · Fully adjustable (5-25 cm) IR electronic detection sensor by means of a potentiometer.
- · Selective detection of fixed targets and automatic disconnection system after 120 seconds of continuous use.

#### Operation

Place the hands under the air outlet. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflowor after 120 seconds of continuous use.

#### Mounting (Recommended heights distance from the floor)

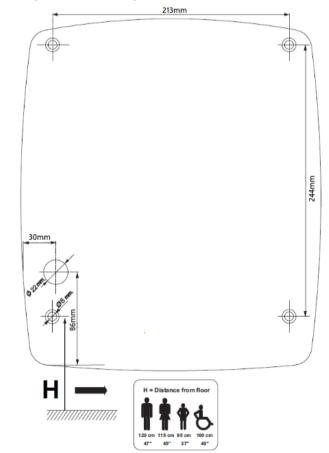

#### Maintenance videos



#### Cover removal:

https://youtu.be/7a9uhMiWsRM

#### **Detection distance adjustment:**

https://youtu.be/RpAIjEhLVi8

#### Electronic circuit board replacement:

 $https://youtu.be/H\_vJAzfoot8$ 

#### **LED Wire Replacement:**

https://youtu.be/rLbMGtOJ3BE

#### Motor replacement :

 $https://youtu.be/bqT\_zC\_JbN0$ 

#### Carbon Brushes Replacement :

https://youtu.be/IWC5LsBSFRw

#### **Heating element replacement:**

https://youtu.be/4F\_yTp57xlA

#### Fan wheel replacement:

https://youtu.be/8SgzcDI5vCA

Note:











# Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 E-mail: acme@acmesanitary.com.hk Website: www. acmesanitaryware.com.hk

# HAND DRYERS

Table

	MODEL	OPERATION DIMINEN		DIMINENSIONS		_ <u> </u> <u> </u> <u> </u> <u> </u> .	ipe	ADJUSTABLE POWER	MOTOR		TRAFFIC FREQUENC		UENCY	
	n	manuals	sensor	r (mm)	lonizer	HEPA filter media Drain Pipe	induction		brush	brushless	HIGH	MEDIUM	LOW	
	dualflowr	1110				Τ						uolfler	radire.	
		LUS									_	ualflo	upius	
	M24A	-	•		8	•	8				•	•	$\vdash$	
	M24AB		•		*	•	*				•	•	$\vdash$	
	M24ACS		•	L320xD228xH665	*	•	*	_			•	•	$\vdash$	
	M14A		•		*	•	8	•		•		•	$\overline{}$	
	M14AB		•			•	8	•		•		•	$\vdash$	
	M14ACS					•	8	•		•	10 .	•	1.0	
	mochflow's	XUS / m		w.						ma	chflow plu		annow.	
	M19A M19AB		•		8	8		•			•	•	-	
-			•		8	8		•			•	•	$\vdash$	
	M19AC	-	•		*	*		•			•	•	$\vdash$	
	M19ACS		•	L213xD170xH330	*	*		•			•	•	$\vdash$	
	M09A	$\longrightarrow$	•		*	*		•		•		•	$\vdash$	
_	M09AB		•		8	8		•		•		•	$\vdash$	
	M09AC		•		*	*		•		•		•	$\vdash$	
	M09ACS	nolare /	•	alti acco		*		•		•	au alua	•	151	
	speedflou	pros/		allow"		_			S		ow plus/		IIIOW*	
	M17A		•		8	•		•		•		•		
- Carr	M17AB		•		8	•		•		•		•		
	M17AC		•		*	•		•		•		•		
-	M17ACS M17AF		•		8	•		•		•		•		
- 11-	M06A		•	L290xD100xH270	8	•		•		•		•	$\vdash$	
			•	(INSIDE CABINET)				•				•		
	M06AB M06AC		•					•		•		•		
	M06ACS		÷					_		•		•		
	M06ACS M06AF		÷					•		·		÷		
	soniflow*		•							_			niflow•	
1	E05	•								•		•		
	E05B	•								•		•	$\overline{}$	
100	E05C	•		L276xD214xH245						•		•	-	
	E05CS	•		1						•		•	$\overline{}$	
	E85	•		L282xD215xH255						•		•		
	E88	•		LEGENDETSKITESS						•		•		
	E88B	•		L278xD212xH248						•		•		
	E88C	•								0		•	$\overline{}$	
	E88CS	•								0		•	-	
	E880	•								•		•	-	
	E05A		•		•					•		•	$\overline{}$	
	E05AB		•		•					•		•		
	E05AC		•	L276xD214xH245	•					•		•		
the min	E05ACS		•		•					•		•		
	E85A			L282xD215xH255						•		•		
	E88A		•		•					•		•		
	E88AB		•	L278xD212xH248	•					•		•		
	E88AC		•		•					•		•		
	E88ACS		•		•					•		•		
	E88AO		•		•					•		•		
	mediflow•											med	diflow	
	M02A		•		•					•			•	
D-	M02AB		•	1	•					•			•	
	M02AC		•		•					•			•	
	M02ACS		•	L275xD164xH325	•					•			•	
	M03A		•	L275XD164XH325	•					•			•	
	M03AB		•		•					•			•	
	M03AC		•		•					•			•	
	M03ACS		•		•					•			•	
-	optima											0,	otima	
	M99A		0	L260xD150xH302	0				0				0	
	M99AC		0		0				0				0	
	M99ACS				0				0				0	
-	juniorplus											Ur	riorplus	
	M88APLUS		0	L253xD150xH303	0				0				0	
1 3	M88PLUS	0		L253xD153xH303					0				0	
	smartflow											sm	artito	JUJ-
	M04A		0		0					0				0
	M04AC		0	L147xD138xH259	0					0				0
12	M04ACS		0		0					0				0
					÷ 0.	tional					•	•		