



## Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
 Tel: 2388 7171 Fax: 2710 8012  
 E-mail: acme@acmesanitary.com.hk  
 Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Mediclinics "Dualflow®Plus" (Spain) ABS sensor operated hand dryer with an ionizer in satin finish
Dimensions	L320 x W228 x H665 mm
Model	M14ACS-I
Material/ Finish	ABS / Satin Finish
Manufacturer	Mediclinics, S.A. (Spain)
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

### General description

- The Dualflow Plus is a fast, energy efficient, ecologic, hygienic & stylish hand dryer, suitable for high traffic facilities.
- “Hands in” model, it has two pairs of IR sensors on both sides of the upper covers for instant hand detection.
- Maximum air speed 410 Km/h.
- Dries hands in only 10/ 15 seconds.
- Motor power adjustable, allowing electricity consumption to be regulated (between 420 and 1.500W).
- It incorporates a HEPA filter medium that filters the solid particles in suspension (pollen, dust mites, tobacco smoke, etc.) significantly improving air quality.
- It can be delivered, optionally, with an ionizer ("Ion Hygienic" technology) that purifies the air through negatively charged particles (anions), eliminating most of the particles and germs carried by the air, making it more healthy and pure.
- Biocote® antimicrobial and antibacterial protection technology based on silver ions. These ions inhibit the reproduction of micro-organisms in the product throughout its lifetime.
- 30 seconds safety timer.
- Lowest noise level in its category. (62 dBA in ECO mode).
- Easy maintenance, it can be connected, optionally, directly to the main wastepipe of the bathroom to eliminate waste water from hand drying.



M14A  
White finish

M14AB  
Black finish

M14ACS  
Satin finish

### Technical Specifications

Voltage	220- 240 V
Frequency	50/60 Hz
Electrical Isolation	Class I
Total power	420 – 1,500 W
Consumption	3.2 – 6.4 A
Motor power	420 – 1,100 W
Rpm	19,000 – 30,000
Heating element power	400 W (with "ON/OFF" switch)
Dimensions	665x320x228 mm
Weight	8.3 Kg
Cover thickness	3 mm
Drying time	10-15 sec.
Effective airflow	94-165m³/h – 1,570-2,750 l/min
Air velocity	234 – 410 Km/h
Air temperature (10 cm distance/21°C)	40 °C
Sound pressure (*) (at 2m)	62 – 72 dBA
Protection rating	IPX4

(\*) According UNE EN ISO 11201:2010 V2

Note:



<https://vimeo.com/268554917>



\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.



## Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

# SANITARY WARE SPECIFICATION SHEET


### Components and materials

- **COVER:** made of high impact ABS.
- **BASE PLATE:** made of plastic PA6V0.
- **MOTOR:** high-speed class F universal brush motor, adjustable from 19000 to 30000 rpm, allowing electricity consumption and sound pressure to be regulated.
- **HEATING ELEMENT:** minimum waved wire NiCr heating element of 400W, mounted on amica frame that incorporates a self-resetable thermal cut-off which disconnect the whole appliance. The heating element can be disconnected by means of an ON/OFF switch.
- **HEPA FILTER MEDIA:** cartridge that holds an HEPA filter medium that filters suspended solid particles (pollen, dust mites, cigarette smoke, etc.), notably improving the air quality. Furthermore, this cartridge also contains an activated carbon filtering medium that neutralizes odours and absorbs fumes and gases, helping avoid bad odours.
- **IONIZER:** cleans and purifies the air through negative ions (anions) which remove microscopic particles from the air making it healthier (optional).
- **INNER TANK:** collects the water. It is removable and it has an external valve for easy emptying.
- **AUTO CHECK-IN LIGHTING PANEL:** for fast diagnosis of the dryer (green -machine running, blue -full tank, red -check engine). Optical and acoustic warning of full tank.
- **ODOR NEUTRALIZER:** for a cleaner and more pleasant atmosphere in the bathroom. (optional)


### Operation

Place the hands between the air outflow valves, inside the hand dryer. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. Move the hands vertically in order to dry them completely. The appliance will stop 2 seconds after the hands are removed from the airflow.

### Mounting (Recommended heights distance form the floor)

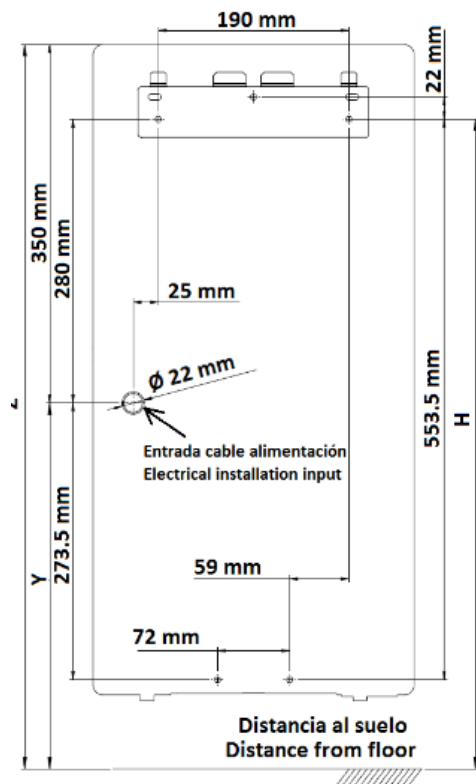

Z =	92 cm (36 1/4")	87 cm (34 1/4")	
H =	85 cm (33 1/2")	80 cm (31 1/2")	
Y =	57 cm (22 1/2")	52 cm (20 1/2")	



**Heating element ON/OFF switch**  
Option to turn ON/OFF the heating element



**Heating element**  
For a maximum comfort



**HEPA filter media**  
Cleans the air stopping the particles of dirt, dust, bacteria, pollen, etc. Clean and fresh air.



**Ionizer**  
Helps to clean and purify the air

### Maintenance videos YouTube

Front cover removal : <https://youtu.be/7Ojcqnqg3ZQ>

Water tank emptying : <https://youtu.be/5fX1aSGeN0k>

IR LED visor cleaning : <https://youtu.be/rH0-Q0LFis8>

Motor power adjustment : <https://youtu.be/Xy0Wuqd2TUg>

Electronic circuit board replacement : <https://youtu.be/-CnlaaQ48zQ>

Motor replacement : [https://youtu.be/6t7D\\_mOjc90](https://youtu.be/6t7D_mOjc90)

Carbon Brushes Replacement : [https://youtu.be/wCRm\\_IT04XM](https://youtu.be/wCRm_IT04XM)

Heating element replacement : <https://youtu.be/LKNtinNxL0Q>

Note: <https://vimeo.com/268554917>



\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.



# Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong










Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

## HAND DRYERS

Table

	MODEL	OPERATION		DIMINENSIONS (mm)	Ionizer	HEPA filter media	Drain Pipe	ADJUSTABLE POWER	MOTOR			TRAFFIC FREQUENCY						
		manual	sensor						induction	brush	brushless	HIGH	MEDIUM	LOW				
	dualflowplus														dualflowplus			
	M24A		●	L320xD228xH665	●	●	●				●	●						
	M24AB		●		●	●	●				●	●						
	M24ACS		●		●	●	●				●	●						
	M14A		●		●	●	●	●		●		●						
	M14AB		●		●	●	●	●		●		●						
	M14ACS		●		●	●	●	●		●		●						
	mochflowplus / mochflow														mochflowplus / mochflow			
	M19A		●	L213xD170xH330	●	●		●			●	●						
	M19AB		●		●	●				●	●							
	M19AC		●		●	●				●	●							
	M19ACS		●		●	●				●	●							
	M09A		●		●	●			●		●	●						
	M09AB		●		●	●			●	●	●	●						
	M09AC		●		●	●			●	●	●	●						
	M09ACS		●		●	●			●	●	●	●						
	speedflowplus / speedflow														speedflowplus / speedflow			
	M17A		●	L290xD100xH270 (INSIDE CABINET)	●	●		●		●		●						
	M17AB		●		●	●				●		●						
	M17AC		●		●	●				●		●						
	M17ACS		●		●	●				●		●						
	M17AF		●		●	●				●		●						
	M06A		●					●		●		●						
	M06AB		●					●		●		●						
	M06AC		●					●		●		●						
	M06ACS		●					●		●		●						
	M06AF		●					●		●		●						
	soniflow														soniflow			
	E05	●		L276xD214xH245						●		●						
	E05B	●								●		●						
	E05C	●								●		●						
	E05CS	●		L282xD215xH255						●		●						
	E85	●								●		●						
	E88	●								●		●						
	E88B	●		L278xD212xH248						●		●						
	E88C	●								●		●						
	E88CS	●								●		●						
	E88O	●								●		●						
E05A		●	L276xD214xH245		●					●		●						
E05AB		●		●					●		●							
E05AC		●		●					●		●							
E05ACS		●		●					●		●							
	E85A		●	L282xD215xH255	●					●		●						
	E88A		●		●					●		●						
	E88AB		●	L278xD212xH248	●					●		●						
	E88AC		●		●					●		●						
	E88ACS		●		●					●		●						
	E88AO		●		●					●		●						
		mediflow														mediflow		
		M02A		●	L275xD164xH325	●					●			●				
M02AB			●	●						●			●					
M02AC			●	●						●			●					
M02ACS			●	●						●			●					
M03A			●	●						●			●					
M03AB			●	●						●			●					
M03AC			●	●						●			●					
M03ACS			●	●						●			●					
	optima														optima			
	M99A		●	L260xD150xH302	●				●				●					
	M99AC		●		●				●				●					
	M99ACS		●		●				●				●					
	juniorplus														juniorplus			
	M88APLUS		●	L253xD150xH303	●				●				●					
	M88PLUS	●		L253xD153xH303					●				●					
	smartflow														smartflow			
	M04A		●	L147xD138xH259	●					●				●				
	M04AC		●		●					●				●				
	M04ACS		●		●					●				●				

\* Optional