




Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

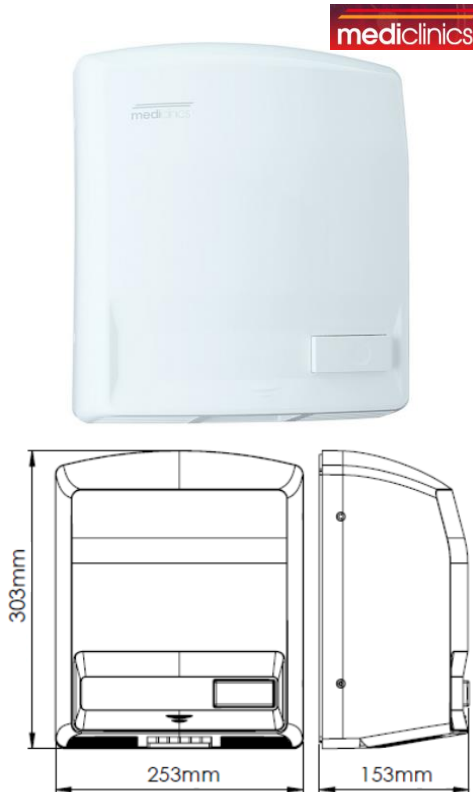Item Descriptions	Mediclinics "JuniorPlus®" (Spain) ABS wall-mounted push-button hand dryer in white finish	<div>Illustration/ Drawing</div> <div></div>																																		
Dimensions	L253 x W153 x H303 mm																																			
Model	M88PLUS																																			
Material/ Finish	ABS / White Finish																																			
Manufacturer	Mediclinics, S.A. (Spain)																																			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																																			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																			
E-mail	acme@acmesanitary.com.hk																																			
Website	www.acmesanitary.com.hk																																			
General description <ul style="list-style-type: none">Mediclinics JuniorPlus® push-button operated hand dryers have been designed for those washroom environments that require an excellent value for money. Equipped with a one piece ABS resistant cover and with a modern design these hand dryers are suitable for medium / small washrooms.These hand dryers are equipped with an induction motor, which do not require any maintenance and they are manufactured using the highest quality materials.The manual model includes an electronic timer with a 45 seconds cycle which is activated by means of a push-button switch.These dryers also provide maximum safety, with a safety thermal cut off installed in the motor and another one in the dryer's heating element.																																				
Components & materials: <ul style="list-style-type: none">M88APLUS: White ABS thermoplastic one-piece cover, 3 mm thick.Fire resistant plastic PP-V0 base and fan scroll, with 4 Ø 6mm holes for wall mounting.Induction motor, 2.800 rpm, maintenance-free and high durability, incorporates a safety thermal cut-off.Waved wire NiCr heating element on a mica frame that incorporates a thermal cut-off.Fire resistant plastic PP-V0 with single inlet fan wheel.45 seconds cycle electronic timer.Zamak air outlet grill.																																				
Technical Specifications: <table><tr><td>Voltage</td><td>220- 240 V</td></tr><tr><td>Frequency</td><td>50/60 Hz</td></tr><tr><td>Electrical Isolation</td><td>Class II</td></tr><tr><td>Total power</td><td>1,640 W</td></tr><tr><td>Consumption</td><td>7 A</td></tr><tr><td>Motor power</td><td>140 W</td></tr><tr><td>Rpm</td><td>2,800</td></tr><tr><td>Heating element power</td><td>1,500 W</td></tr><tr><td>Dimensions</td><td>303x253x153 mm.</td></tr><tr><td>Weight</td><td>3 Kg</td></tr><tr><td>Cover thickness</td><td>3 mm</td></tr><tr><td>Drying time</td><td>38 sec.</td></tr><tr><td>Effective airflow</td><td>215 m³/h (3,590 L/min)</td></tr><tr><td>Air velocity</td><td>50 Km/h</td></tr><tr><td>Air temperature (10 cm distance/21°C)</td><td>57 °C</td></tr><tr><td>Sound pressure ^(*) (at 2m)</td><td>57 dBA</td></tr><tr><td>Protection rating</td><td>IP21</td></tr></table> <p>(*) According to UNE EN ISO 11201:2010 V2 standard.</p>			Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class II	Total power	1,640 W	Consumption	7 A	Motor power	140 W	Rpm	2,800	Heating element power	1,500 W	Dimensions	303x253x153 mm.	Weight	3 Kg	Cover thickness	3 mm	Drying time	38 sec.	Effective airflow	215 m ³ /h (3,590 L/min)	Air velocity	50 Km/h	Air temperature (10 cm distance/21°C)	57 °C	Sound pressure ^(*) (at 2m)	57 dBA	Protection rating	IP21
Voltage	220- 240 V																																			
Frequency	50/60 Hz																																			
Electrical Isolation	Class II																																			
Total power	1,640 W																																			
Consumption	7 A																																			
Motor power	140 W																																			
Rpm	2,800																																			
Heating element power	1,500 W																																			
Dimensions	303x253x153 mm.																																			
Weight	3 Kg																																			
Cover thickness	3 mm																																			
Drying time	38 sec.																																			
Effective airflow	215 m ³ /h (3,590 L/min)																																			
Air velocity	50 Km/h																																			
Air temperature (10 cm distance/21°C)	57 °C																																			
Sound pressure ^(*) (at 2m)	57 dBA																																			
Protection rating	IP21																																			

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk


PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Operation

Press the push-button to initiate the drying process, place both hands under the air outlet and rub them together. The dryer will go on with no interruption for 45 seconds.

Mounting (Recommended hights distance from the floor)

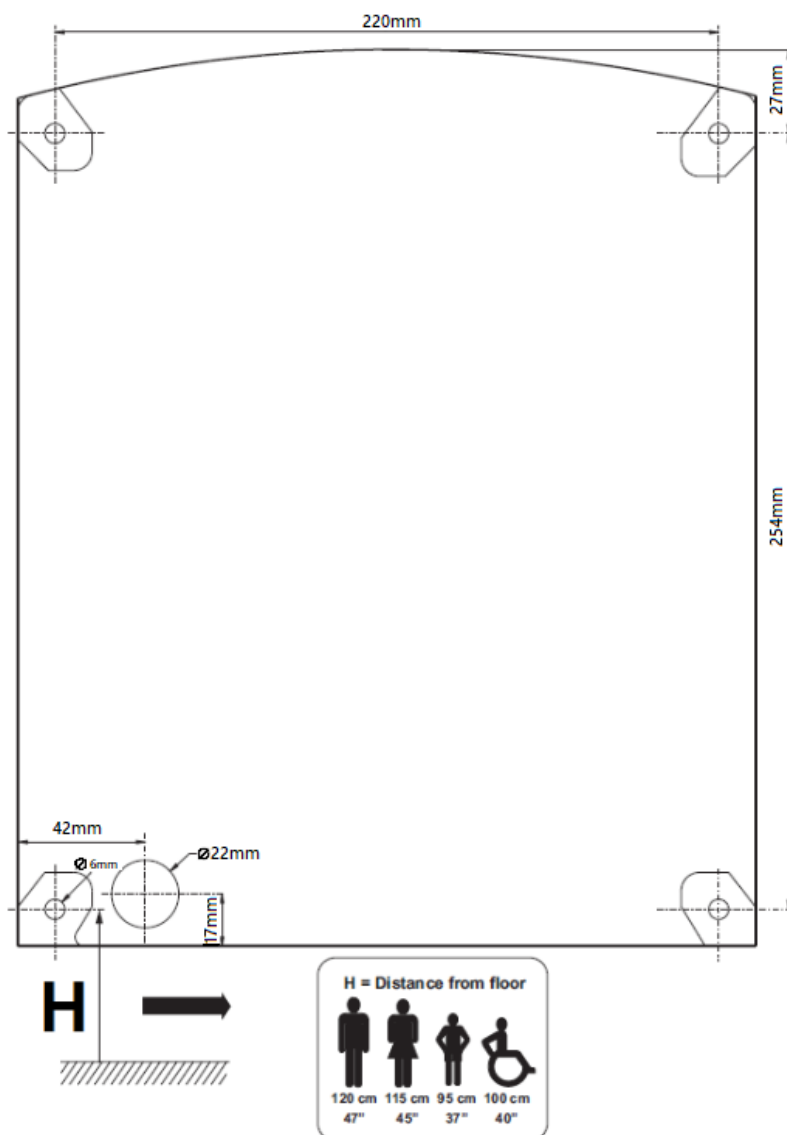

Maintenance videos



Cover removal :

<https://youtu.be/qrOgoOlgGxI>

Electronic circuit board replacement :

<https://youtu.be/SIKtWI9EJxs>

Motor replacement :

<https://youtu.be/aACnodw7Cew>

Heating element replacement :

<https://youtu.be/rbssPVZJX9Q>

Fan wheel replacement :

<https://youtu.be/lC-9ZZTDnWM>

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics,



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong









Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

HAND DRYERS

Table

	MODEL	OPERATION		DIMENSIONS (mm)	Ionizer	HEPA filter media	Drain Pipe	ADJUSTABLE POWER	MOTOR			TRAFFIC FREQUENCY					
		manual	sensor						induction	brush	brushless	HIGH	MEDIUM	LOW			
	dualflow ^{plus}														dualflow ^{plus}		
	M24A		●	L320xD228xH665	✱	●	✱				●	●					
	M24AB		●		✱	●	✱				●	●					
	M24ACS		●		✱	●	✱				●	●					
	M14A		●		✱	●	✱	●		●		●					
	M14AB		●		✱	●	✱	●		●		●					
	M14ACS		●		✱	●	✱	●		●		●					
	machflow ^{plus} / machflow														machflow ^{plus} / machflow		
	M19A		●	L213xD170xH330	✱	✱		●			●	●					
	M19AB		●		✱	✱		●			●	●					
	M19AC		●		✱	✱		●			●	●					
	M19ACS		●		✱	✱		●			●	●					
	M09A		●		✱	✱		●	●			●					
	M09AB		●		✱	✱		●	●			●					
	M09AC		●		✱	✱		●	●			●					
	M09ACS		●		✱	✱		●	●			●					
	speedflow ^{plus} / speedflow														speedflow ^{plus} / speedflow		
	M17A		●	L290xD100xH270 (INSIDE CABINET)	✱	●		●		●		●					
	M17AB		●		✱	●		●		●		●					
	M17AC		●		✱	●		●		●		●					
	M17ACS		●		✱	●		●		●		●					
	M17AF		●		✱	●		●		●		●					
	M06A		●					●		●		●					
	M06AB		●					●		●		●					
	M06AC		●					●		●		●					
	M06ACS		●					●		●		●					
	M06AF		●					●		●		●					
	soniflow ⁺														soniflow ⁺		
	E05	●		L276xD214xH245						●		●					
	E05B	●								●		●					
	E05C	●								●		●					
	E05CS	●								●		●					
	E85	●		L282xD215xH255						●		●					
	E88	●								●		●					
	E88B	●								●		●					
	E88C	●			L278xD212xH248						●		●				
	E88CS	●								●		●					
	E88O	●								●		●					
	E05A		●	L276xD214xH245		●					●		●				
	E05AB		●		●					●		●					
	E05AC		●		●					●		●					
E05ACS		●	●						●		●						
E85A		●	L282xD215xH255	●					●		●						
E88A		●		●					●		●						
E88AB		●		●					●		●						
E88AC		●		L278xD212xH248	●					●		●					
E88ACS		●	●						●		●						
E88AO		●	●						●		●						
	mediflow ⁺														mediflow ⁺		
	M02A		●	L275xD164xH325	●					●			●				
	M02AB		●		●					●			●				
	M02AC		●		●					●			●				
	M02ACS		●		●					●			●				
	M03A		●		●					●			●				
	M03AB		●		●					●			●				
	M03AC		●		●					●			●				
	M03ACS		●		●					●			●				
	optima														optima		
	M99A		●	L260xD150xH302	●				●				●				
	M99AC		●		●				●				●				
	M99ACS		●		●				●				●				
	juniorplus														juniorplus		
	M88APLUS		●	L253xD150xH303	●				●				●				
	M88PLUS	●		L253xD153xH303					●				●				
	smartflow ⁺														smartflow ⁺		
	M04A		●	L147xD138xH259	●					●				●			
	M04AC		●		●					●				●			
	M04ACS		●		●					●				●			

✱ Optional