Acme Sanitary Ware Co. Ltd.
1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
Email: acme@acmesanitary.com.hk
Website: www.acmesanitary.com.hk
Since 1949

GROHE PROFESSIONAL WORK SMARTER

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) concealed flushing cistern 3/6L dual flush, 1.13M installation height; Skate Cosmopolitan **Brushed Cool Sunrise ABS** wall plate for pneumatic discharge valve in the vertical orientation during installation; Inlet Set included
Dimensions	L156 x H197 x D10 mm
Model	38732GN0 (Wall plate) 38661000 (Concealed cistern) 37102SH0 (Inlet Set)
Finish	Brushed Cool Sunrise
Manufacturer	GROHE Limited
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Skate Cosmopolitan Flush plate
or dual flush or start & stop actuation
for pneumatic drop valve AV1
for vertical and horizontal installation
for mounting of small flush plates please order
inspection shaft 40 911 000 (sold separately)
GROHE StarLight finish
GROHE EcoJoy technology for less water
and perfect flow

Rapid SL 3 in 1 set for WC
flushing cistern GD 2
with small maintenance access
1.13 m installation height
for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections
for single or rail installation
quick adjustment, lockable, fixing material
TÜV approved, 2 WC fixing bolts
fixing device for ceramic
distance of fixing bolts 180/230 mm
depth adjustable

inlet and outlet connecting set
flushing cistern GD 2, 6 - 9 l
adjustment ex factory 6l and 3l
pneumatic discharge valve offering
3 modes of operation: dual flush or
start/stop or non-interruptible
water supply from left/right or back
low noise (group I acc. to
German Noise Specification), DIN approved
insulated against condensation
½" water supply connection including
integrated
angle valve and push fit flexible hose union
no tools required for the installation
of the inspection shaft incl. protection
during construction phase
accessories for on-the-wall installation
including wall plate Skate Cosmopolitan
for dual flush or start & stop actuation
vertical and horizontal installation
vertical installation, 156 x 197 mm
chrome, made of ABS
GROHE StarLight® chrome finish

Illustration/ Drawing

Inlet set 37102SH0



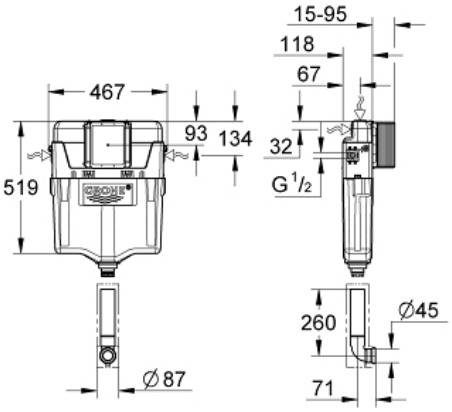



** All information of the above is for the reference only. No prior notice is made if any changes.*

Acme Sanitary Ware Co. Ltd.
1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
Email: acme@acmesanitary.com.hk
Website: www.acmesanitary.com.hk
Since 1949

GROHE PROFESSIONAL WORK SMARTER

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) Plastic single top push flush valve	Illustration/ Drawing
Model	42320000	
Finish	Plastic	
Manufacturer	GROHE Limited	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

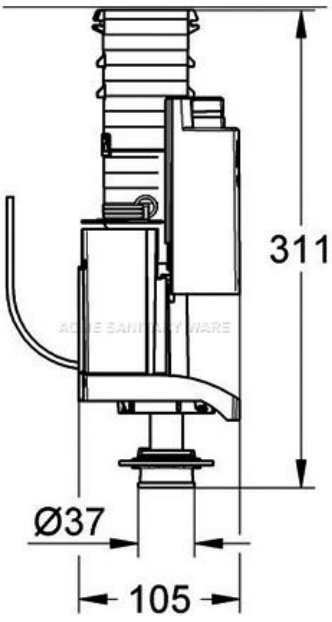

Note:

** All information of the above is for the reference only. No prior notice is made if any changes.*

水 務 署
Water Supplies Department

總部 Headquarters
[illegible]士打道七號入境事務大樓 48 樓
[illegible] Tower, 7 Gloucester Road, Wan Chai, Hong Kong

ACME SANITARY WARE CO. LTD. 2388 7171

本署檔號 *Our ref.* : [illegible]21/2024 T/J(133/2024)
來函檔號 *Your ref.* :

電話 *Tel.* :
傳真 *Fax.* : 2824 0578

27 February 2024

Approval of "GROHE" Flush Valve
(General Acceptance No. C20240141F)

Your E-Application [file-id: ETJ-GA-20240206-3] dated 6 February 2024 refers.

Having considered the test report ref. J29467 issued on 4 January 2024 by Nutek Systems (HK) Limited; this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:	Grohe AG
Country of Origin:	Germany
Brand:	Grohe
Details of Fitting:	37mm Plastic dual flush valve
Model:	42320000
Body Markings:	GROHE
Expiry Date:	19 December 2028

Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,

(Terry KUNG)
for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only

Since 1949
Acme Sanitary Ware Co. Ltd.
1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
Email: acme@acmesanitary.com.hk
Website: www.acmesanitary.com.hk

GROHE PROFESSIONAL WORK SMARTER

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) Plastic inlet valve
Model	37095000
Finish	Plastic
Manufacturer	GROHE Limited
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

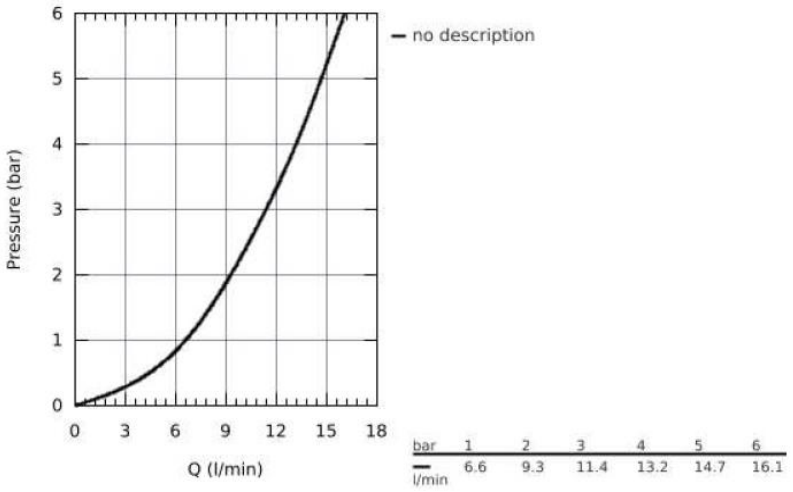

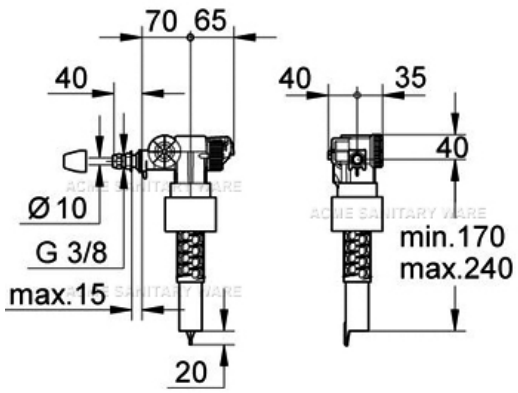

Note:

** All information of the above is for the reference only. No prior notice is made if any changes.*

水 務 署
Water Supplies Department

香港灣仔告士打道七號入境事務大樓
Immigration Tower, 7 Gloucester Road, Hong Kong.

電子郵遞 *e-mail* [illegible]4.gov.hk

電 *Teleph* [illegible] 圖文傳真 *Facsimile* 2824 0578

檔 *Referen* (2 [illegible] W [illegible] 21/2025 T/J(574/2025)

3 September 2025

Dear Madam,

Approval of "GROHE" Float Operated Valve
(General Acceptance No. ZC20250669F)

Your E-Application [file-id: ETJ-GA-20250606-137] dated 13 June 2025 and subsequent submissions received by this department up to 13 August 2025 refer.

Having considered the test report ref. J30503r2 issued on 11 August 2025 by Nutek Systems (HK) Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:	Grohe AG
Country of Origin:	Germany
Brand:	Grohe
Details of Fitting:	3/8" Plastic float operated valve
Model:	37095000
Body Markings:	GROHE
Expiry Date:	2 September 2030

Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing systems.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,

(Terry KUNG)
for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only