


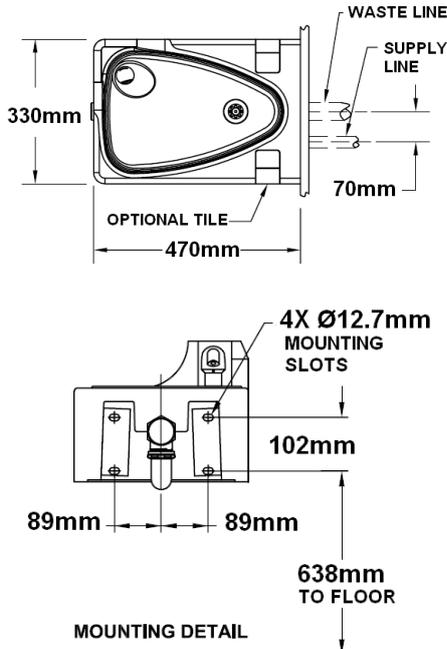

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

<p>Item Descriptions</p> <p>Haws (USA) Wall mounted concrete adult or child barrier-free drinking fountain</p>	<p>Haws (USA) Wall mounted concrete adult or child barrier-free drinking fountain</p>	<p style="text-align: center;">Illustration/ Drawing</p> 
<p>Model</p> <p>1047</p>	<p>1047</p>	
<p>Material</p> <p>Concrete</p>	<p>Concrete</p>	
<p>Manufacturer</p> <p>Haws Corporation (USA)</p>	<p>Haws Corporation (USA)</p>	
<p>Source</p> <p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung</p>	<p>Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung</p>	
<p>Contact Tel/Fax</p> <p>(852) 2388-7171 / (852) 2710-8012</p>	<p>(852) 2388-7171 / (852) 2710-8012</p>	
<p>E-mail</p> <p>acme@acmesanitary.com.hk</p>	<p>acme@acmesanitary.com.hk</p>	
<p>Website</p> <p>www.acmesanitary.com.hk</p>	<p>www.acmesanitary.com.hk</p>	
<p>Specification:</p> <p>Wall mounted adult or child barrier-free drinking fountain shall include a stainless steel basin contained in a vandal-resistant, vibra-cast reinforced concrete wall bracket with exposed aggregate finish, 100% lead-free waterways, push-button operated valve with front-accessible cartridge and flow adjustment, polished chrome-plated brass vandal-resistant bubbler head, polished chrome-plated brass vandal-resistant waste strainer with top-down access, vandal-resistant bottom plate, and chrome-plated 1-1/2" IPS trap.</p>		
<p>Features & Benefits:</p> <p>BUBBLER HEAD</p> <p>Polished chrome-plated brass bubbler head features an integral basin shank for added strength, and is equipped with a shielded, anti-squirt orifice that provides a steady sanitary source of water.</p> <p>MOUNTING</p> <p>3/16" steel mounting plate with supplied mounting hardware provides a solid unit base and allows for easy installation to a framed wall.</p> <p>DRAIN CLEAN-OUT</p> <p>Top-down access to the drain allows the fountain to be cleaned without taking the unit apart, which is ideal for outdoor settings that are high in drain-clogging sediment like leaves, garbage, and other debris.</p> <p>PUSH BUTTON</p> <p>With its patented (Pat.# 6,981,692) stainless steel, push-button activated valve assembly which allows for front access stream adjustment as well as cartridge and strainer access, this fountain offers 100% lead free waterways. The valve works at an operating pressure range of 30 to 90 psi.</p>		<p>MOUNTING DETAIL</p> <p>4X Ø12.7mm MOUNTING SLOTS</p> <p>102mm</p> <p>89mm</p> <p>89mm</p> <p>638mm TO FLOOR</p>

Note:

* All information of the above is for reference only. No prior notice is made if any changes.

Source: Haws Corporation