



## Acme Sanitary Ware Co Ltd


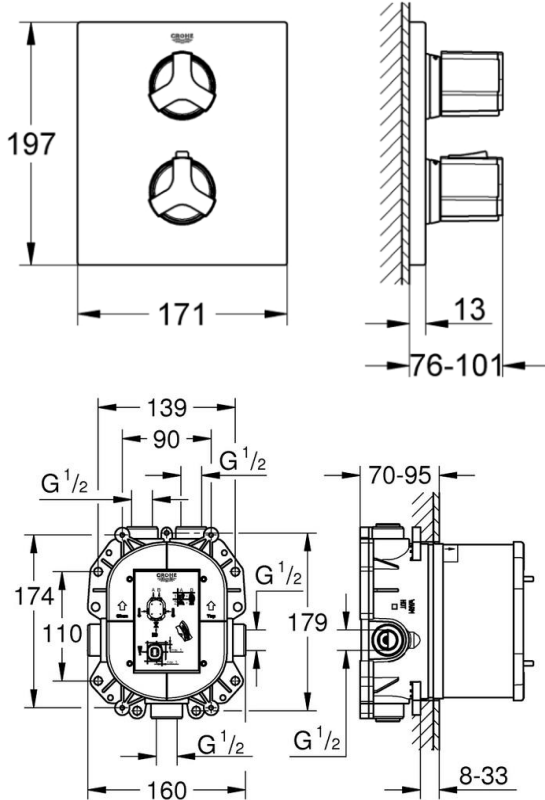

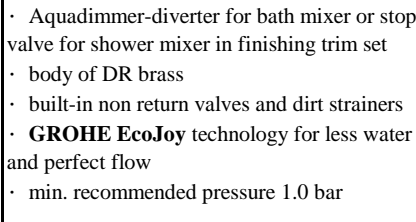
Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
 Tel: 2388 7171 Fax: 2710 8012  
 E-mail: acme@acmesanitary.com.hk  
 Website: www.acmesanitaryware.com.hk



Pure Freude  
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Allure" Chrome plated thermostatic bath & shower mixer with 2-way diverter and concealed body		Illustration/ Drawing	
Dimensions	L171 x W101 x H197 mm			
Model	19446000 (Thermostatic mixer) 35500000 (Separate concealed body)			
Finish	Chrome Plated			
Country of origin	Germany			
Manufacturer	GROHE Limited			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen (852) 2388-7171 / (852) 2710-8012 acme@acmesanitary.com.hk www.acmesanitary.com.hk			
Contact Tel/Fax				
E-mail				
Website				
"Allure" <u>Thermostatic bath &amp; shower mixer with integrated 2-way diverter</u>	<u>"GROHE Rapido T"</u> <u>Thermostatic mixer for concealed installation</u>			
<ul style="list-style-type: none"><li>• GROHE StarLight chrome finish</li><li>• temperature scale handle with GROHE SafeStop safety stop at 38°C (calibration required)</li><li>• GROHE SafeStop Plus optional temperature limiter at 43°C included</li><li>• shut off and flow control</li><li>• Aquadimmer with multiple function</li><li>• metal escutcheon</li><li>• without concealed body</li></ul>		<ul style="list-style-type: none"><li>• for use with Grohtherm Special</li><li>• without finishing trim set</li><li>• flat installation depth 70 - 95 mm</li><li>• easy to install, premounted and tested unit</li><li>• GROHE TurboStat compact cartridge with wax thermoelement</li><li>• two top outlets 1/2", lockable</li><li>• high flow rate up to 50 l/min. by use of three outlets</li><li>• bottom outlet 1/2" can be used only with separate stop valve</li><li>• safe to install, stable built-in-box and protective cap</li><li>• fixation options for solid walls and dry cladding</li><li>• material for wall sealing included</li><li>• Aquadimmer-diverter for bath mixer or stop valve for shower mixer in finishing trim set</li><li>• body of DR brass</li><li>• built-in non return valves and dirt strainers</li><li>• GROHE EcoJoy technology for less water and perfect flow</li><li>• min. recommended pressure 1.0 bar</li></ul>		
				

Note:  (35500000 Grohe Rapido T Universal) <https://www.youtube.com/watch?v=M5vICM45qkE>

\* All information of the above is for the reference only. No prior notice is made if any changes.



## Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
E-mail: acme@acmesanitary.com.hk  
Website: www.acmesanitaryware.com.hk



Pure Freude  
an Wasser

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	


## SANITARY WARE SPECIFICATION SHEET

### GROHE ALLURE

#### BEAUTY MEETS FUNCTION

Perfectly balanced proportions on the outside and technically advanced on the inside – Allure unites inherent beauty with unmatched performance. Cylindrical bodies rise from square and rectangular base plates adding to its minimalist appeal, while the collection offers a choice of two handle styles – a flat lever or a tri-spoke design – to meet your exacting requirements.

Faucets and fittings in this collection illustrate our commitment to unrivalled quality in the bathroom.

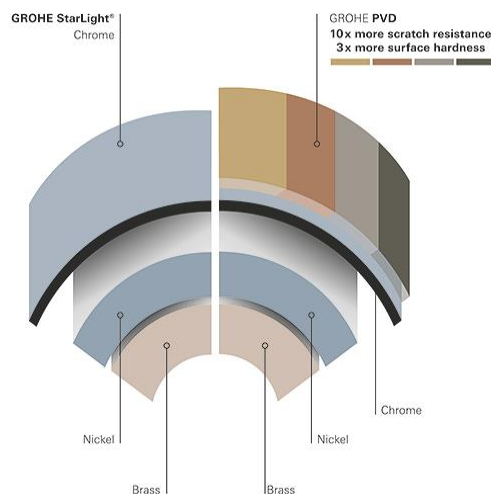

GROHE surface  
hardness



GROHE scratch  
resistance



#### Easy to clean thanks to the GROHE StarLight chrome coating

Just wipe the tap down with a dry cloth – the ultra smooth surface finish is scratch resistant and ensures a lasting luminous sheen. You'll save plenty of time cleaning while your tap always looks shiny and new.

#### GROHE SafeStop (Plus) – double scalding protection at 38°C and (optional) 43°C

Great for homes with children, this safety feature is set at 38°C, preventing you from turning up the water temperature too high. If desired, higher temperatures can be selected by pushing the button. Optional for extra safety: the easy-to-fit GROHE SafeStop Plus limiter ensures that the temperature does not exceed 43°C.

#### Constant water temperature thanks to reliable GROHE TurboStat technology

Our precise control technology ensures an instant water flow at the desired temperature and keeps it constant irrespective of any fluctuations in water pressure or supply.

#### GROHE EcoJoy with water-saving function for reduced consumption

GROHE EcoJoy reduces water consumption by up to 50% without compromising on performance. Whenever you turn on your tap, you will enjoy a full jet of water while saving money nonetheless.



Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.



## Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk


Website: www.acmesanitaryware.com.hk



Pure Freude  
an Wasser


PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

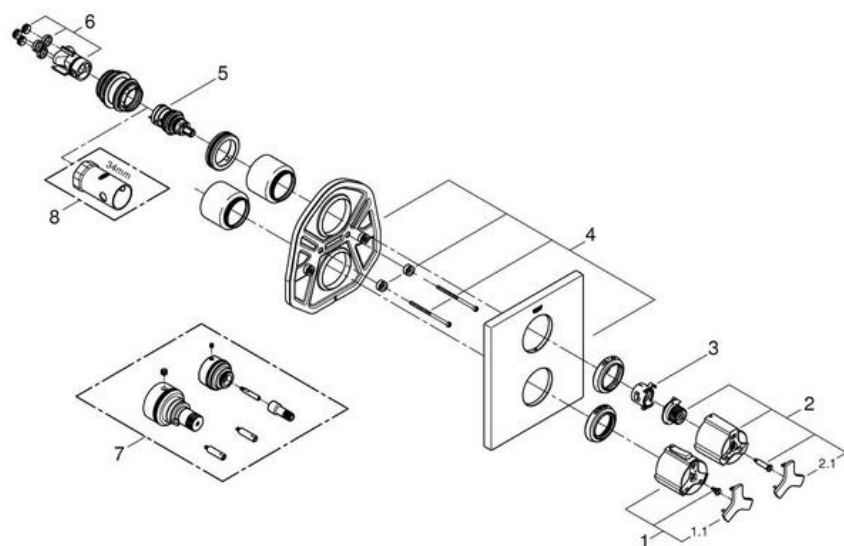

Pos.-nr.	Prod. description	Order-nr.
1	Scale handle Neotherm	47786000
1.1	Cover cap	0635600M
2	Handle for shut-off valve	47793000
2.1	Cover cap	0635600M
3	Stop ring	10089000
4	Escutcheon	47785000
5	Aquadimmer	47364000
6	Adapter	12701000
7	Extension set 27.5 mm	47781000*
8	Socket spanner	19332000*

\* Optional accessories

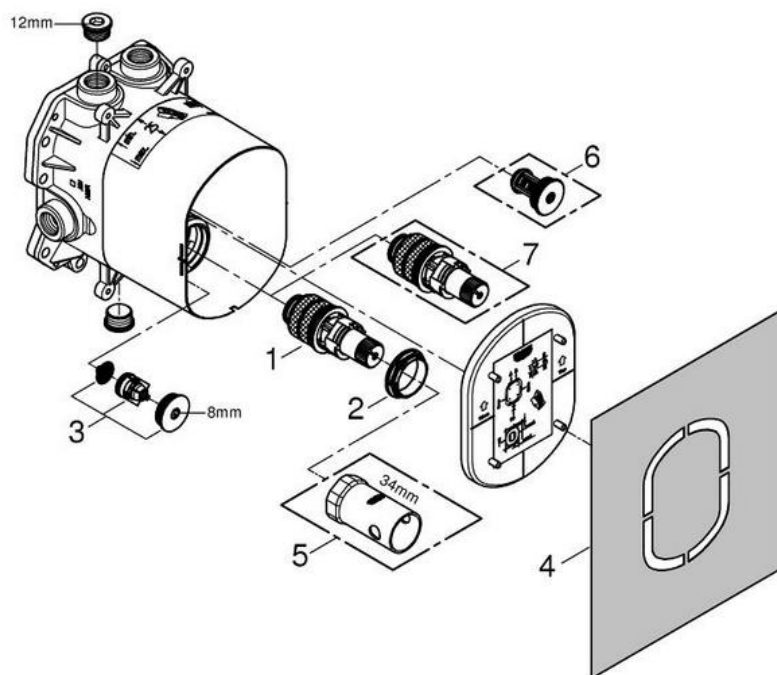

Pos.-nr.	Prod. Description	Order-nr.
1	Thermostatic compact cartridge 3/4"	47483000
2	Fitting ring	47765000
3	Non-return valve	47753000
4	Repl. kit f. seal	48263000
5	Socket spanner	19332000*
6	Safety combination (DIN EN 1717)	29007000*
7	Thermostatic compact cartridge 3/4"	47186000*

\* Optional accessories

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.