



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	


SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Euphoria System 260" Wall-mounted shower system with thermostatic mixer; including showerhead (26457000) and hand shower (27239000); nominated flow rate 7.9 L/min & 7.2 L/min in WELS Grade 1; Registration No. SB 18-0032 & SB 10-0014	Illustration/ Drawing
Dimensions	L472 x W298 x H1132 mm	
Model	27615001	
Finish	Chrome Plated	
Country of origin	Germany	
Manufacturer	GROHE Limited	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

"Euphoria System 260"

Shower system with thermostat for wall mounting

- Consisting of:
- horizontal swivable 450 mm projection shower arm
- **exposed thermostatic shower** with Aquadimmer function
- allows change between:
- head shower Euphoria 260 (26 457 000)
- 3 spray patterns: Rain, SmartRain, Jet
- with ball joint
- rotation angle $\pm 15^\circ$
- hand shower Euphoria 110 Massage (27 239 000)
- 3 spray patterns: Rain, SmartRain, Massage
- adjustable height via gliding element
- Silverflex shower hose 1750 mm (28 388 000)
- **GROHE EcoJoy** 9.5 l/min flow limiter
- **GROHE TurboStat** compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 38°C (**calibration required**)
- **GROHE SafeStop Plus** optional temperature limiter at 43°C included
- **GROHE DreamSpray** perfect spray pattern
- **GROHE StarLight** chrome finish
- **GROHE SprayDimmer** (Stepless flow rate reduction)
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- **Twistfree** preventing the hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 7 l/min.
- optional upgrade: **GROHE EasyReach** tray (26 362)

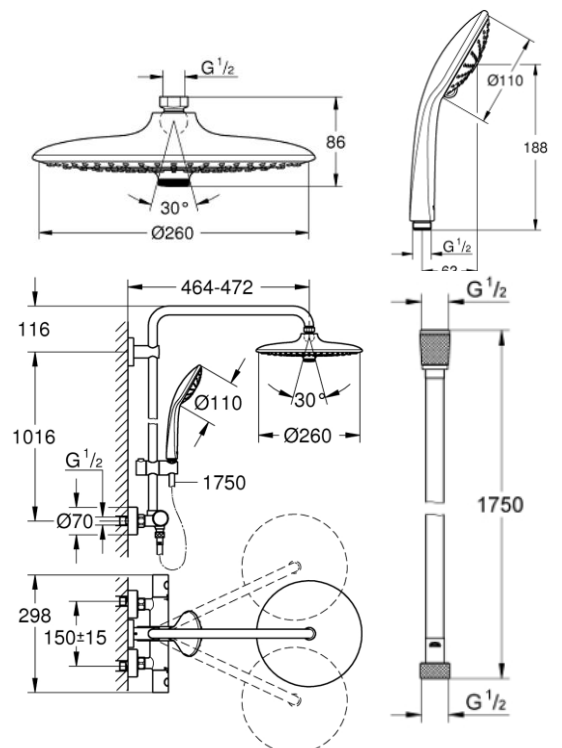

* All information of the above is for the reference only. No prior notice is made if any changes.




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

26457000

"Euphoria 260" Head shower 3 sprays

- Rain, SmartRain, Jet
- Ø 260 mm
- Ball joint +/- 15° rotatable
- connection thread 1/2"
- **GROHE EcoJoy** 9.5 l/min flow limiter
- **GROHE DreamSpray** perfect spray pattern
- **GROHE StarLight** chrome finish
- **SpeedClean** anti-limescale system
- **Inner WaterGuide** for a longer life
- **suitable for instantaneous heater**

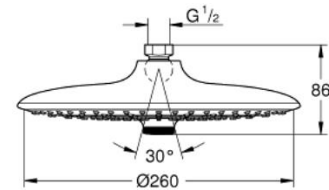

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l/min)	6.45	8.00	7.70	7.98	8.28

GROHE Euphoria 260 SmartControl head shower set – a perfect upgrade for your shower!

Showering style and versatility! With three innovative spray zones, the elegant GROHE Euphoria 260 SmartControl head shower set adds instant luxury to your bathroom. Jet Spray is powerful and focused, perfect for washing out shampoo and an invigorating head or neck massage. The SmartRain Spray is wider for an energizing yet relaxing experience and Rain Spray uses all the nozzles on the generous spray plate for full body coverage and a truly soothing shower. To choose the spray you want all you have to do is turn the innovative button in the centre of the impressive 260mm spray head. Simple! With its slim profile and timeless design, it looks perfect in a wide range of bathroom styles and is packed with GROHE technology. GROHE EcoJoy has a 9.5 l/min flow limiter that saves water while ensuring maximum showering satisfaction. GROHE DreamSpray ensures the flow from every nozzle will be just right – whichever spray zone you select – to deliver the most enjoyable shower possible. The dazzling scratch resistant GROHE StarLight chrome finish keeps its sparkle for a lifetime and limescale can be removed from the silicone SpeedClean nozzles with a simple wipe. It comes complete with a dedicated GROHE Rainshower arm (380mm), is easy to install and the Inner WaterGuide prevents the surface from getting too hot to protect both sensitive skin and the chrome. The elegant GROHE Euphoria 260 SmartControl head shower – delivers everything from relaxation to revitalisation!



3 Spray Selection
Center knob allows for 360 degree rotation in either direction to customize spray width

Jet Spray - 5" Wide
A vigorous spray pattern to stimulate the skin

Rain Spray - 7" Wide
A pulsating spray for a stimulating massage

Smart Rain Spray - 10" Wide
A smart pattern that uses less water to deliver full showering enjoyment

* All information of the above is for the reference only. No prior notice is made if any changes.




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

27239000

"Euphoria 110 Massage" Hand shower 3 sprays

- Rain, Massage, SmartRain
- GROHE EcoJoy 9.5 l/min flow limiter
- GROHE SprayDimmer (Stepless flow rate reduction)
- GROHE StarLight chrome finish
- SpeedClean anti-limescale system
- Inner WaterGuide for a longer life
- Universal Mounting System. Fits all standard shower hoses

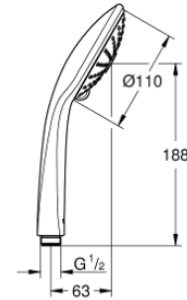

Dynamic flow pressure (kPa)	50	150	250	350	500
Flow rate (l/min)	5.80	7.60	8.30	8.00	8.10



28388000

"Silverflex" Shower hose Twistfree 1750

- 1750 mm
- smooth surface for easy cleaning
- tensile strength 500 N
- pressure resistance up to 5 bar
- heat resistance 70°C
- AntiFold bendproof
- universal connection G 1/2" x 1/2"
- Rotation cone for Twistfree function
- GROHE StarLight chrome finish
- blister packaging





PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET



GROHE EcoJoy with water-saving function for reduced consumption

GROHE EcoJoy reduces water consumption by up to 50% without compromising on performance. Whenever you turn on your tap, you will enjoy a full jet of water while saving money nonetheless.



Constant water temperature thanks to reliable GROHE TurboStat technology

Our precise control technology ensures an instant water flow at the desired temperature and keeps it constant irrespective of any fluctuations in water pressure or supply.



GROHE SafeStop (Plus) – double scalding protection at 38°C and (optional) 43°C

Great for homes with children, this safety feature is set at 38°C, preventing you from turning up the water temperature too high. If desired, higher temperatures can be selected by pushing the button. Optional for extra safety: the easy-to-fit GROHE SafeStop Plus limiter ensures that the temperature does not exceed 43°C.



GROHE DreamSpray for luxurious showering

The GROHE DreamSpray technology turns your daily shower into a luxuriously relaxing experience. The advanced engineering of the shower head ensures a balanced flow of water from all nozzles, whatever spray pattern you choose.



Easy to clean thanks to the GROHE StarLight chrome coating

Just wipe the tap down with a dry cloth – the ultra smooth surface finish is scratch resistant and ensures a lasting luminous sheen. You'll save plenty of time cleaning while your tap always looks shiny and new.



SpeedClean: easy cleaning thanks to silicone nozzle

Indeed, the name says it all: with the SpeedClean technology, you'll have limescale removed from the spout in the blink of an eye thanks to a nozzle made of silicone. A quick wipe with your fingers is all it takes to remove any limescale deposits, saving you a lot of time and effort!



Coating protected by Inner WaterGuide

A strong insulation of the water guide inside the shower prevents its surface from heating up, so it will never be too hot for you to touch. At the same time, this serves to protect the finish of your GROHE shower, further enhancing its great durability.



TwistFree – prevents your shower hose from twisting

TwistFree shower hoses are inspired by everyday experience: ever had to struggle with a twisted shower hose? TwistFree keeps your shower hose flexible and in shape, saving you that trouble.



GROHE EasyReach tray – always keep shower gel and shampoo handy

Always keep your shower gel and shampoo handy with the GROHE EasyReach tray. The flat tray surface is designed to match your tap for a great look and quick easy cleaning.



GROHE StarLight® Chrome

GROHE PVD
10x more scratch resistance
3x more surface hardness

GROHE surface hardness

×3
Chrome PVD

GROHE scratch resistance

×10
Chrome PVD




* All information of the above is for the reference only. No prior notice is made if any changes.





PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Head shower

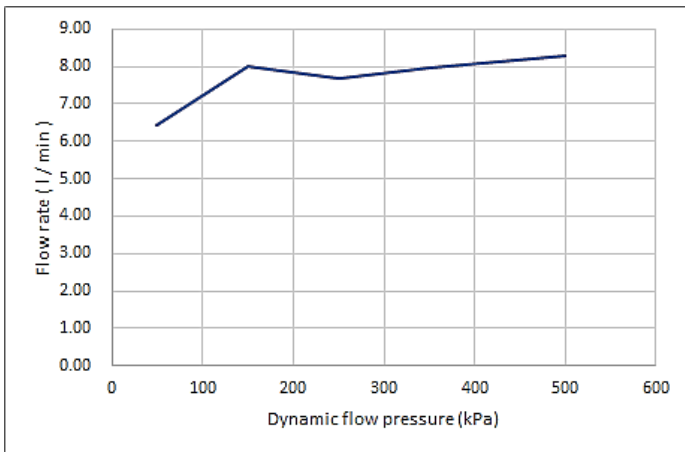

Hand shower

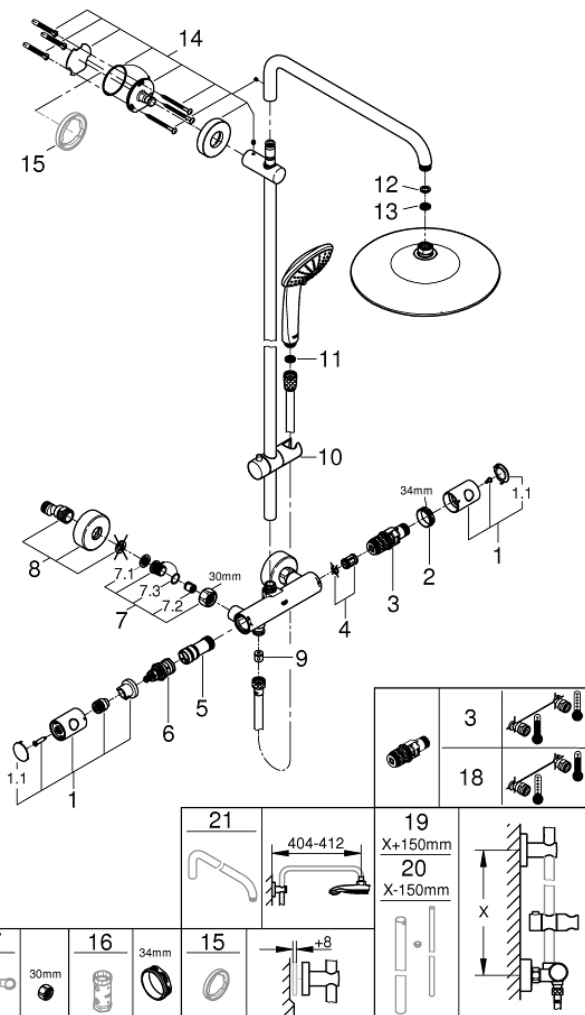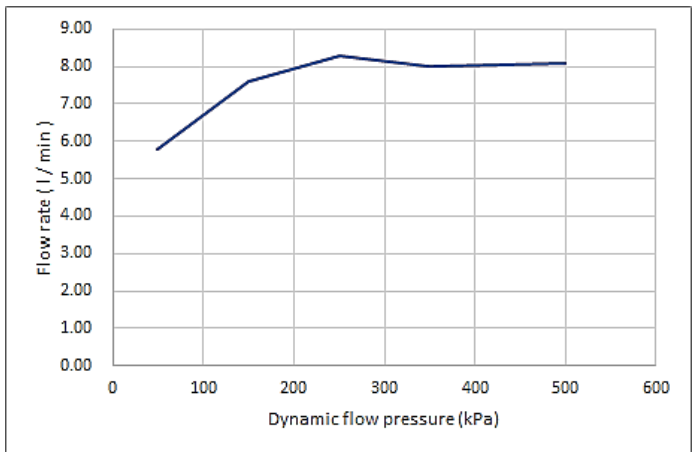

SPARE PARTS

- 1: Metal handle 1/2" (Order-nr. 47984000)
- 1.1: Cover Cap (Order-nr. 6458500M)
- 2: retaining ring (Order-nr. 47743000)
- 3: Thermostatic compact cartridge 1/2" (Order-nr. 47439000)
- 4: Sound absorber (Order-nr. 47398000)
- 5: Water flow (Order-nr. 47751000)
- 6: Aquadimmer (Order-nr. 12433000)
- 7: Non-return valve (Order-nr. 47189000)
- 7.1: Filter (Order-nr. 0726400M)
- 7.2: Non-return valve (Order-nr. 08565000)
- 7.3: O-Ring Ø17 x Ø2 (Order-nr. 0305500M)
- 8: S-union (Order-nr. 12662000)
- 9: Non-return valve (Order-nr. 08565000)
- 10: Sliding piece (Order-nr. 12140000)
- 11: Strainer (Order-nr. 0700200M)
- 12: Fibre seal dia. Ø 18,5 x Ø 12 x 2 (Order-nr. 0138900M)
- 13: Strainer (Order-nr. 48007000)
- 14: Outlet shower holder (Order-nr. 48279000)
- 15: Spacer (Order-nr. 27180000)*
- 16: Socket Spanner (Order-nr. 19332000)*
- 17: Special Spanner (Order-nr. 19377000)*
- 18: GROHE TurboStat cartridge 1/2" (Order-nr. 47175000)*
- 19: Shower system pipe for retrofitting (Order-nr. 48053000)*
- 20: Shower system pipe for retrofitting (Order-nr. 48054000)*
- 21: Shower arm for shower systems (Order-nr. 14047000)*

* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.):

SB 18-0032



自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明
This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme :

牌子 / Brand	:	GROHE
型號 / Model	:	26457000
原產地 / Country or Region Origin	:	Germany

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:		滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1	
耗水量 <i>Water Consumption</i>	:	7.9	公升/分鐘 <i>litres/minute</i>

簽發日期: 14 February 2018
Date of Issue:



水務署
Water Supplies Department



水務署署長(周世威代行)
for Director of Water Supplies



自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



註冊證書

Registration




茲證明

This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme:

牌子 / Brand	:	GROHE
型號 / Model	:	27239 000
原產地 / Country or Region Origin	:	Germany

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:	 滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1
耗水量 <i>Water Consumption</i>	:	7.2 公升/分鐘 <i>litres/minute</i>

簽發日期:
Date of Issue: 27 April 2010

 水務署
Water Supplies Department



水務署署長(錢柱森代行)
for Director of Water Supplies



Services Department

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (2) in WSD 3321/2020 T/J(1607/2020)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.


26 January 2021



Approval of "GROHE" Thermostatic Mixer (General Acceptance No. C20210075)

Your letter ref. WRC/2412 dated 7 December 2020 refers.

Having considered the test report ref. J25910 issued on 27 November 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Grohe AG
Country of Origin: Portugal
Brand: Grohe
Details of Fitting: 1/2" Wall mounted thermostatic shower mixer
Model: 27615XX1
(where the digits "XX" denote the code of colour)
Body Markings: 
Expiry Date: 5 October 2025

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

"The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only