



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Plus" Wall-mounted single-lever bath/shower mixer
Model	33553003
Finish	Chrome Plated
Country of origin	Germany
Manufacturer	GROHE Limited
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

Technical Drawing Dimensions:

- Ø63 (Mounting hole diameter)
- G 1/2 (Mounting thread)
- 55° (Lever angle)
- 90 (Lever width)
- 189 (Lever length)
- 150±15 (Mounting height)
- 311 (Total height)

"Plus"
Single-lever bath/shower mixer

- wall mounted
- metal lever
- **GROHE SilkMove** 35 mm ceramic cartridge
- with temperature limiter
- **GROHE StarLight** chrome finish
- automatic diverter: bath/shower
- laminar mousseur
- shower outlet 1/2"
- integrated non-return valve
- covered S-unions
- protected against backflow
- **min. recommended pressure 1 bar**

33553DC3 33553AL3

Note: [YouTube^{HK} \(GROHE PLUS Faucet Collection\) https://www.youtube.com/watch?v=OcYTTcnL174](https://www.youtube.com/watch?v=OcYTTcnL174)
[YouTube^{HK} \(33553003 Unboxing\) https://www.youtube.com/watch?v=0Oq5Vb84Gi0](https://www.youtube.com/watch?v=0Oq5Vb84Gi0)

* All information of the above is for the reference only. No prior notice is made if any changes.



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	




SANITARY WARE SPECIFICATION SHEET

GROHE PLUS

ACCURACY THAT GOES BEYOND DESIGN

Imagine a bathroom that offers not just sleek, cutting-edge, bold design design, but also confidence and control. Where you can tell water temperature at a glance and switch water flow with just a swipe of your hand. A room where nothing is left to chance, where form delivers function in a sleek, tactile package. With the new GROHE Plus you can make it a reality.

This innovative range puts control and convenience in your hands, delivering accurate temperature information at a glance. The GROHE Plus range includes some faucets with a temperature display, so you know the water will always be just the right temperature. GROHE Plus also offers a new level of ergonomic comfort and practical function too, presented in a silhouette of architectural strength and elegance, with surfaces so sleek they invite interaction.

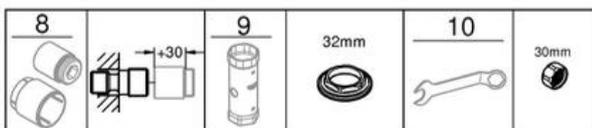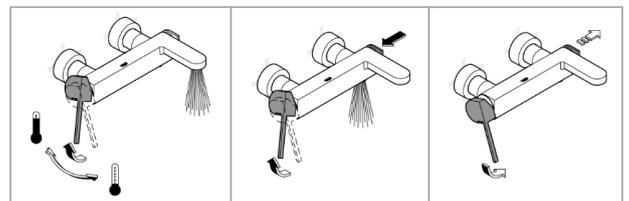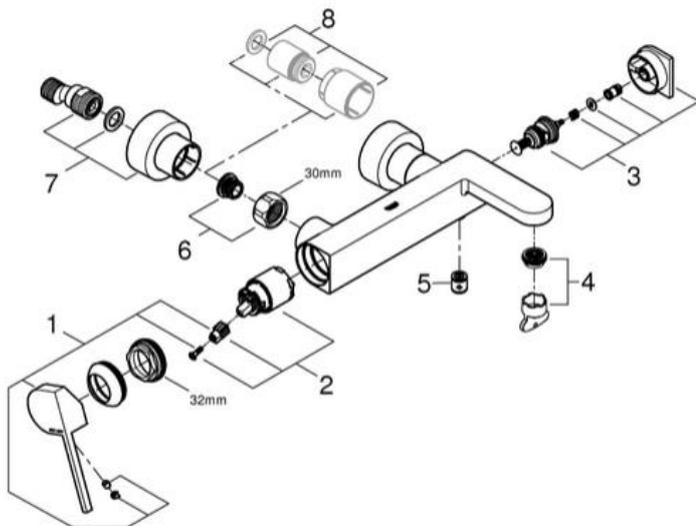

Pos.-nr.	Prod. Description	Order-nr.
1	lever	48450000
2	Cartridge	46374000
3	diverter	48451000
4	Mousseur	48009000
5	Non-return valve	08565000
6	Screw joint	45044000
7	S-union	48453000
8	Extension set 1/2", 30 mm	46238000*
9	Socket spanner	19332000*
10	Special spanner	19377000*

* Optional accessories

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Supplies Department

Quarters

灣仔告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (4) in WSD 3321/2020 T/J(1067/2020)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

19 October 2020

Approval of "GROHE" Bath/Shower Mixer (General Acceptance No. C20200930)

Your letters ref. WRC/2307 and C-WSD/0641 dated 13 August 2020 and 5 October 2020 respectively refer.

Having considered the test report ref. J24739r1 issued on 18 September 2020 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Grohe AG
Country of Origin: Portugal
Brand: Grohe
Details of Fitting: 1/2" Single lever bath/shower mixer
Model: 33553XX3
(where the digits "XX" denote the code of colour)
Body Markings: 
Expiry Date: 5 November 2024



This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

"The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only