
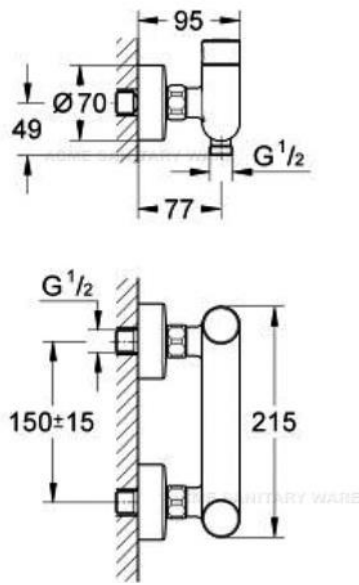




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	GROHE (Germany) "Eurosmart Cosmopolitan T" Chrome plated self-closing shower mixer with mixing device and adjustable temperature limiter	Illustration/ Drawing
Dimensions	Refer to drawing	
Model	36320000	
Material	Chrome Plated	
Manufacturer	GROHE Limited	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
<p>1/2" Self-closing shower valve with mixture G 1/2" and G 3/4" hose connection</p> <ul style="list-style-type: none"><li>• Wall mount</li><li>• Mixing device with hot water shut-off flow time 15 sec. adjustable to 7 or 30 sec pressure range 7 - 90 psi</li><li>• S-unions</li><li>• Non-return valve</li><li>• Dirt strainers</li><li>• DVGW Reg. No. ordered</li><li>• <b>GROHE EcoJoy®</b> technology for less water and perfect flow</li><li>• <b>GROHE StarLight®</b> finish</li><li>• <b>GROHE CoolTouch®</b></li></ul>		

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.



## Technical data

- Minimum flow pressure 0.5 bar
- Operating pressure max. 10 bar
- Recommended flow pressure 1 - 5 bar
- Test pressure 16 bar

If static pressures exceed 5 bar, a pressure-reducing valve must be installed.

Avoid major pressure differences between hot and cold water supply.

- Flow rate at 3 bar flow pressure  
36 319: ca. 9 l/min  
36 320 (without downstream resistances): ca. 15 l/min  
max. 70 °C
- Temperature  
Recommended (energy saving): 60 °C
- Running time:  
ca. 7 s/15 s/30 s  
cold - right  
hot - left
- Water connection

## Setting the running time

1. Close water supply.
2. Unscrew cap (H) with cartridge, see Fig. [7].
3. Detach cylinder (I) from the cartridge.
4. The running time is changed by adding or removing insert rings (J):  
yellow + blue insert rings = ca. 7 s  
yellow insert ring = ca. 15 s (factory setting)  
no insert ring = ca. 30 s
5. Reattach cylinder (I) to the cartridge and refit the cartridge with cap (H).

