



PROJECT	REF	RE	EV ITEM CODE	\bigcirc
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Stern (Israel) "Prox & Wave Sensor" Chrome	Illustration/ Drawing	
	plated touch free electronic prox & wave sensor kit		
	for toilets ; 9V Battery or 9V Transfomer (not		
	included)		
Dimensions	L57 x W35 x H35 mm		
Model	Prox & Wave Kit for Toilets		
Coda Number	620100		
Finish	Chrome Plated		
Source	Acme Sanitary Ware Co. Ltd	27.5	
	Mr. Eric Wong/ Mr. Don Yuen		
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	57 Bane Cur	
E-mail	acme@acmesanitary.com.hk	Sheet Front	
Website	www.acmesanitary.com.hk	<u>Д</u>	
PROX SENSOR KIT	FOR TOILETS	Ψ.	
Ref # 620100			
_	ox sensor kit for toilets. Includes a proximity sensor unit, solenoid power supply. Filter included. The following settings can be		
changed by using the St	ern remote control: Sensor Range, Delay In, Delay Out and On-		
Off.		201 F	
Application:		5	
· · ·	modification of almost any traditional sanitary ware into an e. It's widely utilized in environments requiring high level of	122	
	bitals, geriatric centers, prisons, restaurant kitchens and in the meat		
	nodular, it fits any interior and can be integrated with any existing	Water temperature: Max 70°C	
water outlet. The solenoid valve is simply installed onto the water-line, allowing water to flow to the toilet.		Operating pressure:	
		1.0 - 8.0 bar	
Use: Water will be delivered	automatically when the user moves away from the sensor.	Power source: 9V Battery / 9V Transformer	
		er sately er handemet	
	STEEL MATTING BALLY BOULD PVD BOSE BOSE PUPE		
		(, or (, , , , , , , , , , , , , , , , , ,	
		(not included)	

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.



Acme Sanitary Ware Co Ltd Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 E-mail: acme@acmesanitary.com.hk Website: www. acmesanitary.ware.com.hk



.

SANITARY WARE SPECIFICATION SHEET


PROX & WAVE SENSOR KIT FOR TOILET WITH PRIMARY FLUSH

This kit is designed to operate a two volumes flush valve. The sensor detects the user at a given distance, and operates an automatic flush using the sensor's prox function once the user has left the toilet. Depending on time and distance, the systems delivers 3 liters to evacuate liquids and 6 liters to evacuate solids. To maximize hygiene, the system allows the user upon arriving to the toilet to operate a primary cleaning flush using the sensor's wave function.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- · Primary cleaning flush upon presentation of hand
- · Options for duct concealed and brick wall (front fixation) installations.
- · Water saving dual flush performance
- · Bespoke settings adjustable with the Stern remote control
- · Maximum achievement of LEED points
- Hygiene Flush: To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non-use. Prevents the trap seal from drying out, possible freezing of pipes and potential bacteria in standing water. This function can be disabled using the remote control.

This function can be disabled using the femote control.

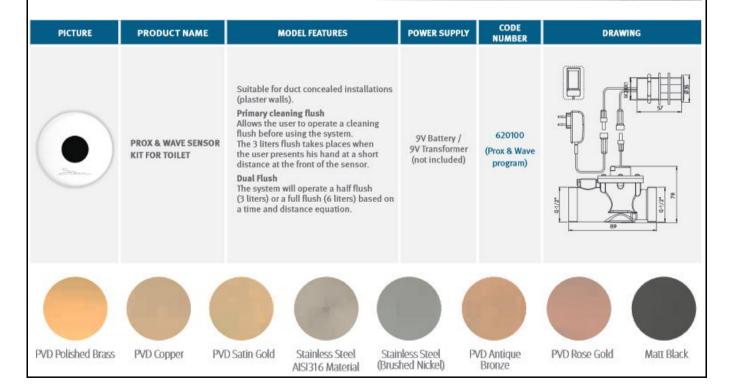

B PROX OPT

LEED RAT

Note: In order to locate the relevant spare part, please check the corresponding parts and part mumber in the drawing. Minimum order quantity will be required.

* All information of the above is for the reference only. No prior notice is made if any changes.