Acme Sanitary Ware Co. Ltd.
1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
Email: acme@acmesanitary.com.hk
Website: www.acmesanitary.com.hk
Since 1949

SIAMP

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	SIAMP (Monoco Brand) 1/2" **extractable** and **extendable** bottom inlet valve fitting
Dimensions	Refer to drawing
Model	99T
Material	Plastic
Manufacturer	Siamp (Vietnam)
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012
E-mail	acme@acmesanitary.com.hk
Website	www.acmesanitary.com.hk

Illustration/ Drawing

WRAS



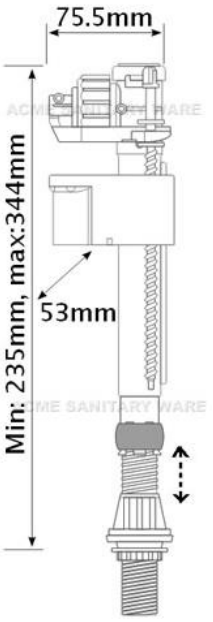

DESCRIPTION

Low pressure
Compact with telescopic adjustment
Can be installed into ceramic or plastic cisterns, recessed or low level cisterns, for replacement or as original equipment
Hydraulic closure (no water hammer shock)
Adjustable water level
Quiet
Anti-backflow function
• 1/2" plastic :
- flow rate : 0.22l/s at 3 bars
Pressure function range from 0.1 to 10 bars

Note:

** All information of the above is for reference only. No prior notice is made if any changes.*

水 務 署
Water Supplies Department

總部 Headquarters
香港灣仔告士打道七號入境事務大樓 48 樓
...tion Tower, 7 Gloucester Road, Wan Chai, Hong Kong

ACME SANITARY WARE CO. LTD. 2388 7171

本署檔 *Our ref.* (... W ... 21/2023 T/J(786/2023)

來函檔號 *Your ref.*

電話 *Tel.* :

傳真 *Fax.* : 2824 0578

19 September 2023



Approval of "SIAMP" Float Operated Valve
(General Acceptance No. C20230699F)

Your letters dated 2 August 2023 and 23 August 2023 refer.

Having considered the test report ref. RSIA001 issued on 28 April 2023 by Ideal Test Consultants Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:	Siamp Ltd
Country of Origin:	Vietnam
Brand:	Siamp
Details of Fitting:	1/2" Plastic float operated valve
Model:	99T
Body Markings:	**SIAMP** W
Expiry Date:	20 April 2028

Proviso: As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,

(Terry KUNG)
for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only