

## Acme Sanitary Ware Co. Ltd.


1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Since 1949 Website: www.acmesanitary.com.hk


# ANSPORN®

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

#### SANITARY WARE SPECIFICATION SHEET


Item Descriptions Ansporn (PRC) Chrome plated brass 3/8" single lever basin mixer with stainless steel wire braided water inlet hose; Nominal flow rate 4.8 L/Min in WELS Grade 1; Registration No. TM 19-0108 L111 x W45 x H111 mm Dimensions Model A6102-I Finish Chrome Plated Manufacturer Ansporn (PRC) Source Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012 E-mail acme@acmesanitary.com.hk Website www.acmesanitary.com.hk 6.00



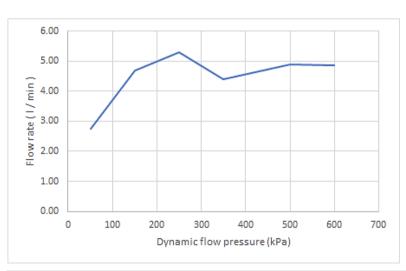

50

2.75



Note:

Dynamic flow pressure (kPa)

Flow rate (1/min)

150

4.70

250

5.30

350

4.40

500

4.88

600

4.85

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.

TM 19-0108



## 自願參與用水效益標籤計劃 - 水龍頭 Voluntary Water Efficiency Labelling Scheme - Water Taps





茲證明 This is to certify that

### 將下列水龍頭在本計劃內註冊: has registered the following water tap under this scheme:

 牌子/Brand
 : Ansporn

 型號/Model
 : A6102-I

 種類/Type
 : Mixing

 原產地/Country or Region Origin
 : China

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

滴水點

Water droplet(s)

用水效益級別

Water Efficiency Grade

: 1

耗水量

Water Consumption

4.8

公升/分鐘 litree/minute

簽發日期: Date of Issue:

27 March 2019





水務署署長(張業駒代行) for Director of Water Supplies



#### 水務署 Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

ration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 Our ref. 來函檔號 Your ref.



2023 T/J(1017/2023)

電話

Tel. 傅真 Fax.

2824 0578

14 December 2023



#### Approval of "ANSPORN" Basin Mixer (General Acceptance No. C20230924)

Your letters ref. TFWC-2023-007, TFWC-2023-007R and TFWC-2023-007R1 dated 3 October 2023, 26 October 2023 and 17 November 2023 respectively refer.

Having considered the test report ref. J29146 issued on 27 September 2023 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: I

Kaiping City Doyei Sanitary Ware Corporation Limited

Country of Origin:

the Mainland of China

Brand:

Ansporn

Details of Fitting:

3/8" Single lever basin mixer

Model:

A6102-I

**Body Markings:** 

Ansporn

**Expiry Date:** 

24 July 2028





This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,

(Terry KUNG) for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82 ] - without catalogue ME/MC ] - with soft copy only



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Since 1949 Website: www.acmesanitary.com.hk

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	F3/8" x M10x1" x 350mm Stainless steel flexible hose	Illustration/ Drawing
Dimensions	Refer to drawing	
Model	HL-SS-01-10-008-035	
Finish	Stainless Steel	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	and continuent management of the continuent of t

Note:			

<sup>\*</sup> All information of the above is for reference only. No prior notice is made if any changes.



本署檔號

Our ref.

Your ref.

#### 水務署 Water Supplies Department



8 November 2019

: 2824 0578

Fax.



Dear Sir,

### Approval of "HL" Flexible Hoses (General Acceptance No. B20190064)

ref. TFWC-2019-010, TFWC-2019-010R1 Your letters TFWC-2019-010R dated 27 September 2019, 23 October 2019 and 25 October 2019 respectively refer.

It is noted that the fittings described below have been accepted by the United Kingdom Water Regulations Advisory Scheme (WRAS) to have complied with the requirements of the United Kingdom Water Supply (Water Fittings) Regulations / Scottish Water Byelaws when correctly installed. This Authority accepts that the fittings described below based on the WRAS certificate comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Kaiping City Hualing Hoses Co Ltd

Country of Origin: the Mainland of China

Brand: HL

Nylon and stainless steel braided flexible hose assemblies **Details of Fitting:** 

> with EPDM inner hose and brass end connectors which incorporate EPDM washers and 'O'-rings. Maximum





working pressure 10.0 bar. Maximum working

temperature 85°C

Model and Size:

HL-SS-XX-XX-XXX HL-N-XX-XX-XXX

SS=Stainless Steel Braided Hose

N=Nylon Pull out Hose

1st & 2nd XX = Connection sizes:

01=F3/8 02=F1/2

03=F3/4 (only available on SS models) 04=F15\*1 (only available on SS models) 05=M3/8 (only available on SS models) 06=M1/2 (only available on SS models) 07=M3/4 (only available on SS models)

08=M15 09=M12 10=M10

12=Pushfit (M) 11mm ID or (F) 11mm OD

1st XXX: Hose size:

Nylon and stainless steel braided hoses:

006= DN6, 008= DN8

Stainless steel braided hoses only:

010= DN10, 014= DN14

2nd XXX: Hose length: 15CM - 200CM

**Body Markings:** 

Hualing, WRAS and date of manufacture (yyyy) on

ferrule

WRAS Approval Number: 1909363

**Installation Requirements: R001** 

**Expiry Date:** 

30 September 2024

In view of the acceptance by WRAS, this Authority has no objection to the use of the said fittings in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following installation requirements –

"Installation shall comply with the 'Installation Requirements & Notes' of the WRAS's approval letter concerned." AND

"The inlet flexible hose is applied for the water tap or mixer connection only and installed in the fresh water plumbing systems."

A condition of this acceptance is that the fittings to be installed should be replicas of the samples certified by WRAS and no modification should be made to the fittings. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in fresh water plumbing systems.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,

(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82 ] - without catalogue ME/MC ] - with soft copy only