
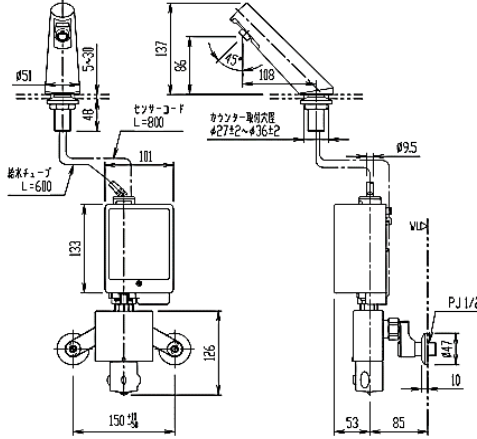




PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	


SANITARY WARE SPECIFICATION SHEET

Item Descriptions	INAX (Japan) Chrome plated deck mounted thermostatic sensor mixer for cold & hot water in DC operated ; built-in flow controller A-8187; hydro generator power; Nominal flow rate 2.9L/min in WELS Grade 1 ; Registration No. TM 20-0102					<div>Illustration/ Drawing</div> <div></div>											
Dimensions	Height: 137mm																
Model	AM-200TC																
Finish	Chrome Plated																
Manufacturer	Inax (Japan)																
Country of Origin	Japan																
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																
E-mail	acme@acmesanitary.com.hk																
Website	www.acmesanitary.com.hk																
<table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td></tr><tr><td>Flow rate (l/ min)</td><td>1.60</td><td>2.80</td><td>2.90</td><td>2.95</td><td>2.95</td></tr></table>						Dynamic flow pressure (kPa)	50	150	250	350	500	Flow rate (l/ min)	1.60	2.80	2.90	2.95	2.95
Dynamic flow pressure (kPa)	50	150	250	350	500												
Flow rate (l/ min)	1.60	2.80	2.90	2.95	2.95												
<div></div>																	


Note: 日本 INAX A-4305 感應龍頭電芯 (AM-200TC專用)





単水栓タイプ

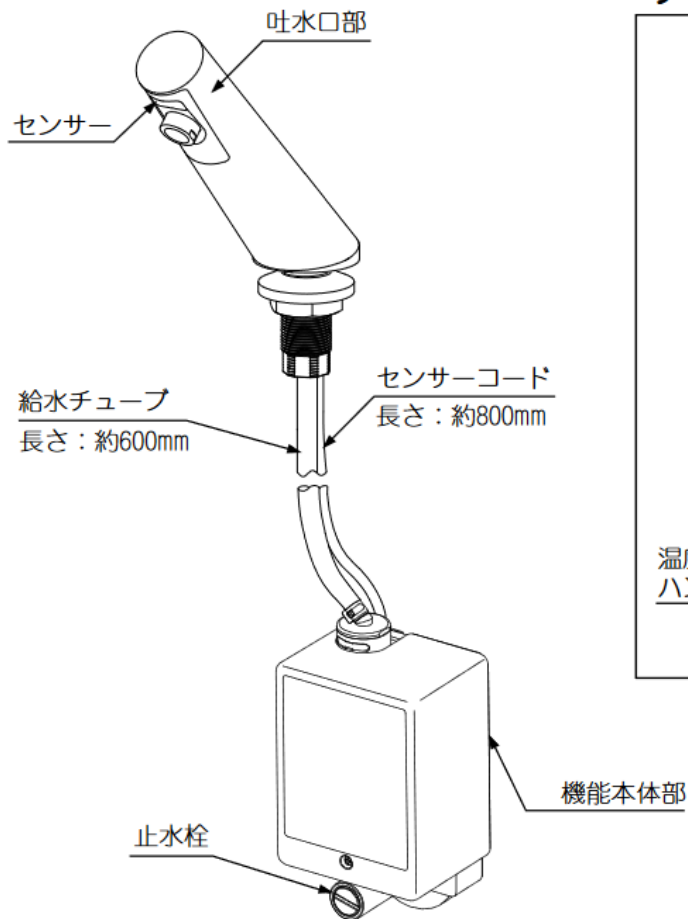


サーモスタット付タイプ

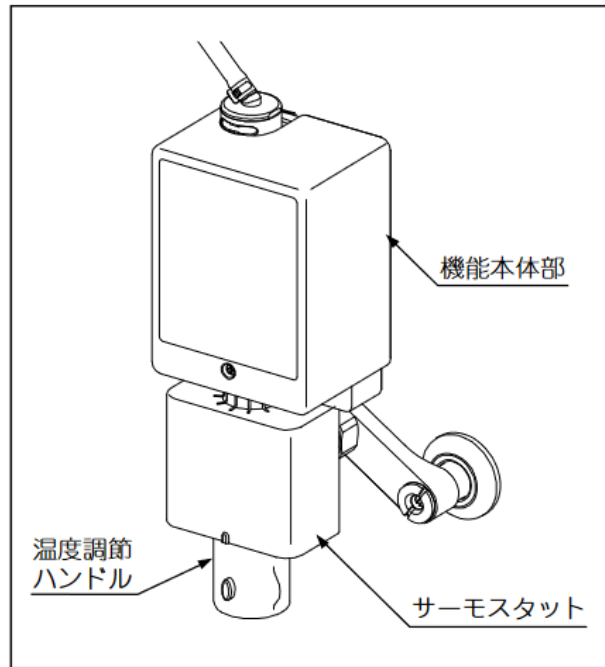




※品番によっては止水栓の形状が異なります。

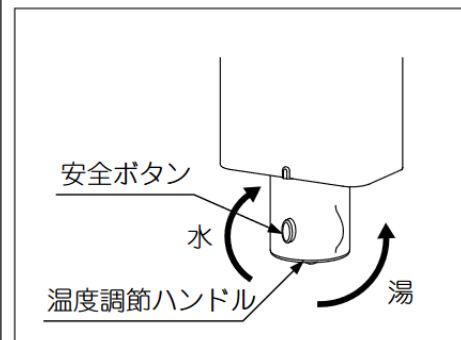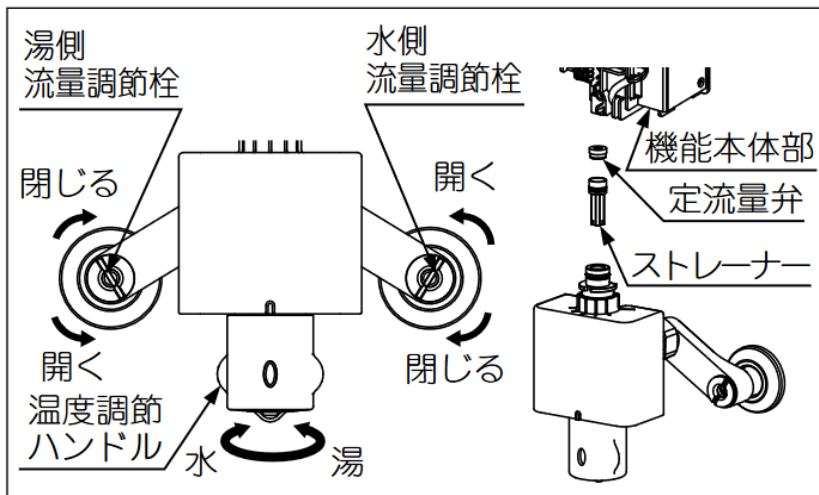






※センサーは赤外線を透過してしまうガラスなどでできたコップや花瓶は感知できません。また、ステンレス製およびメッキを施したコップなどは感知しないことがあります。感知範囲に手をかざしてご使用ください。

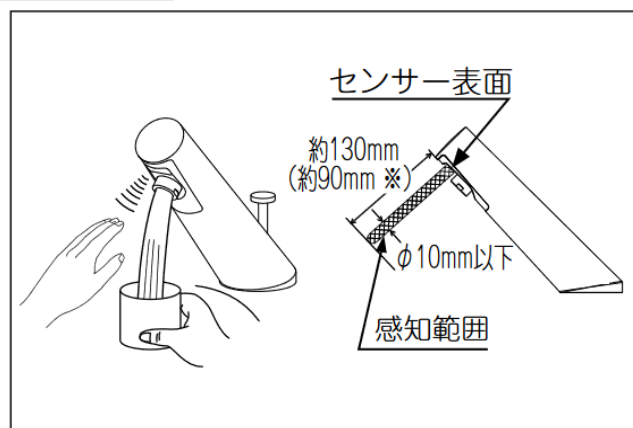


【サーモスタットタイプの場合】【単水栓の場合】

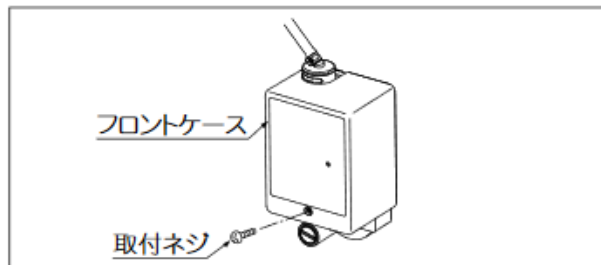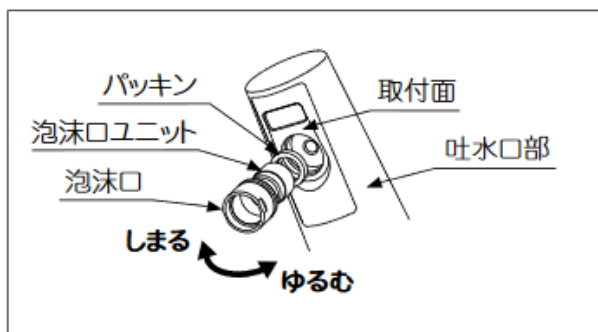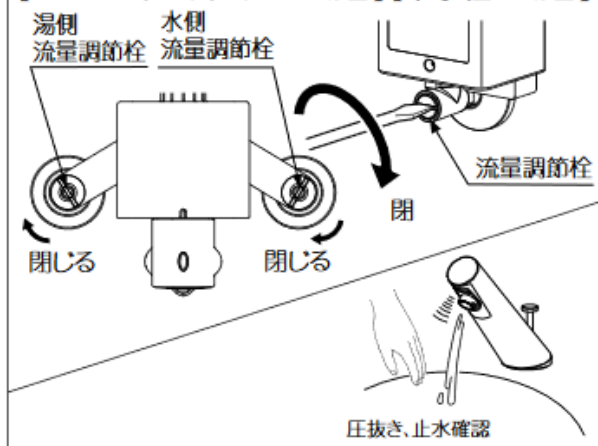

専用リチウム電池(品番: A-4305)の寿命と交換について

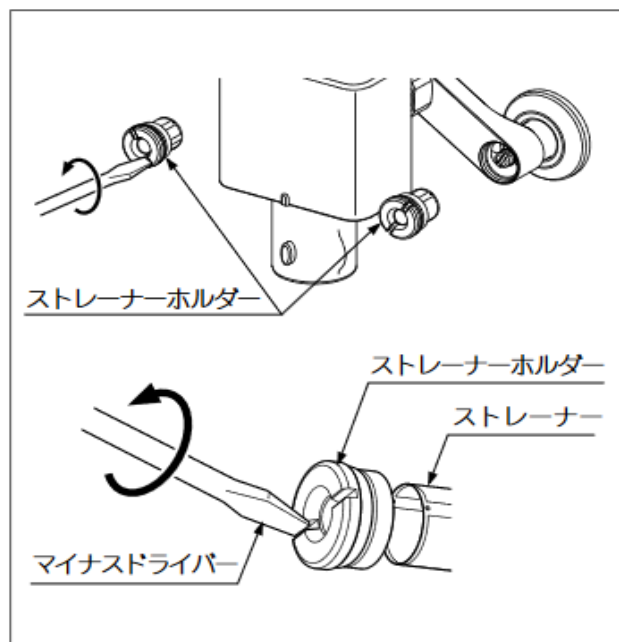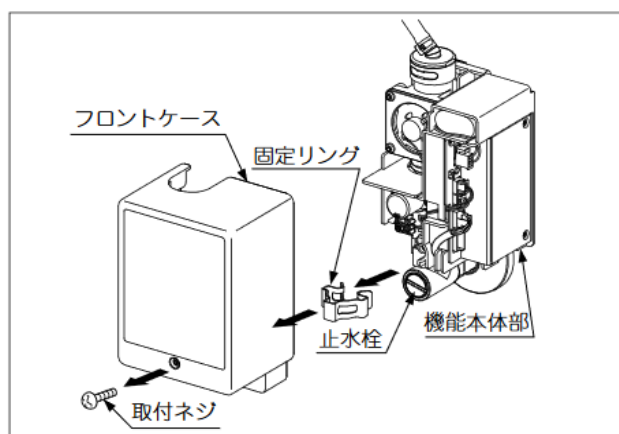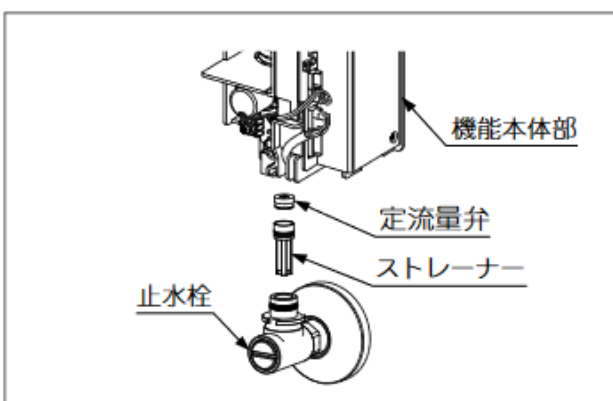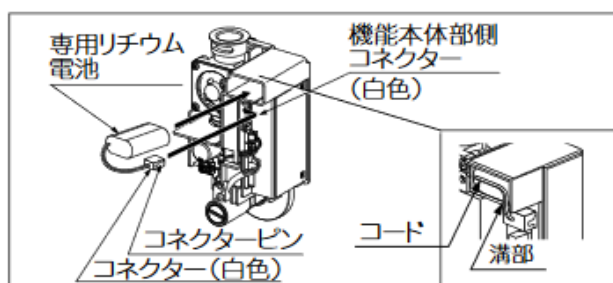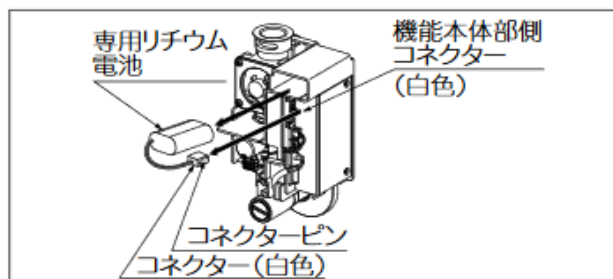

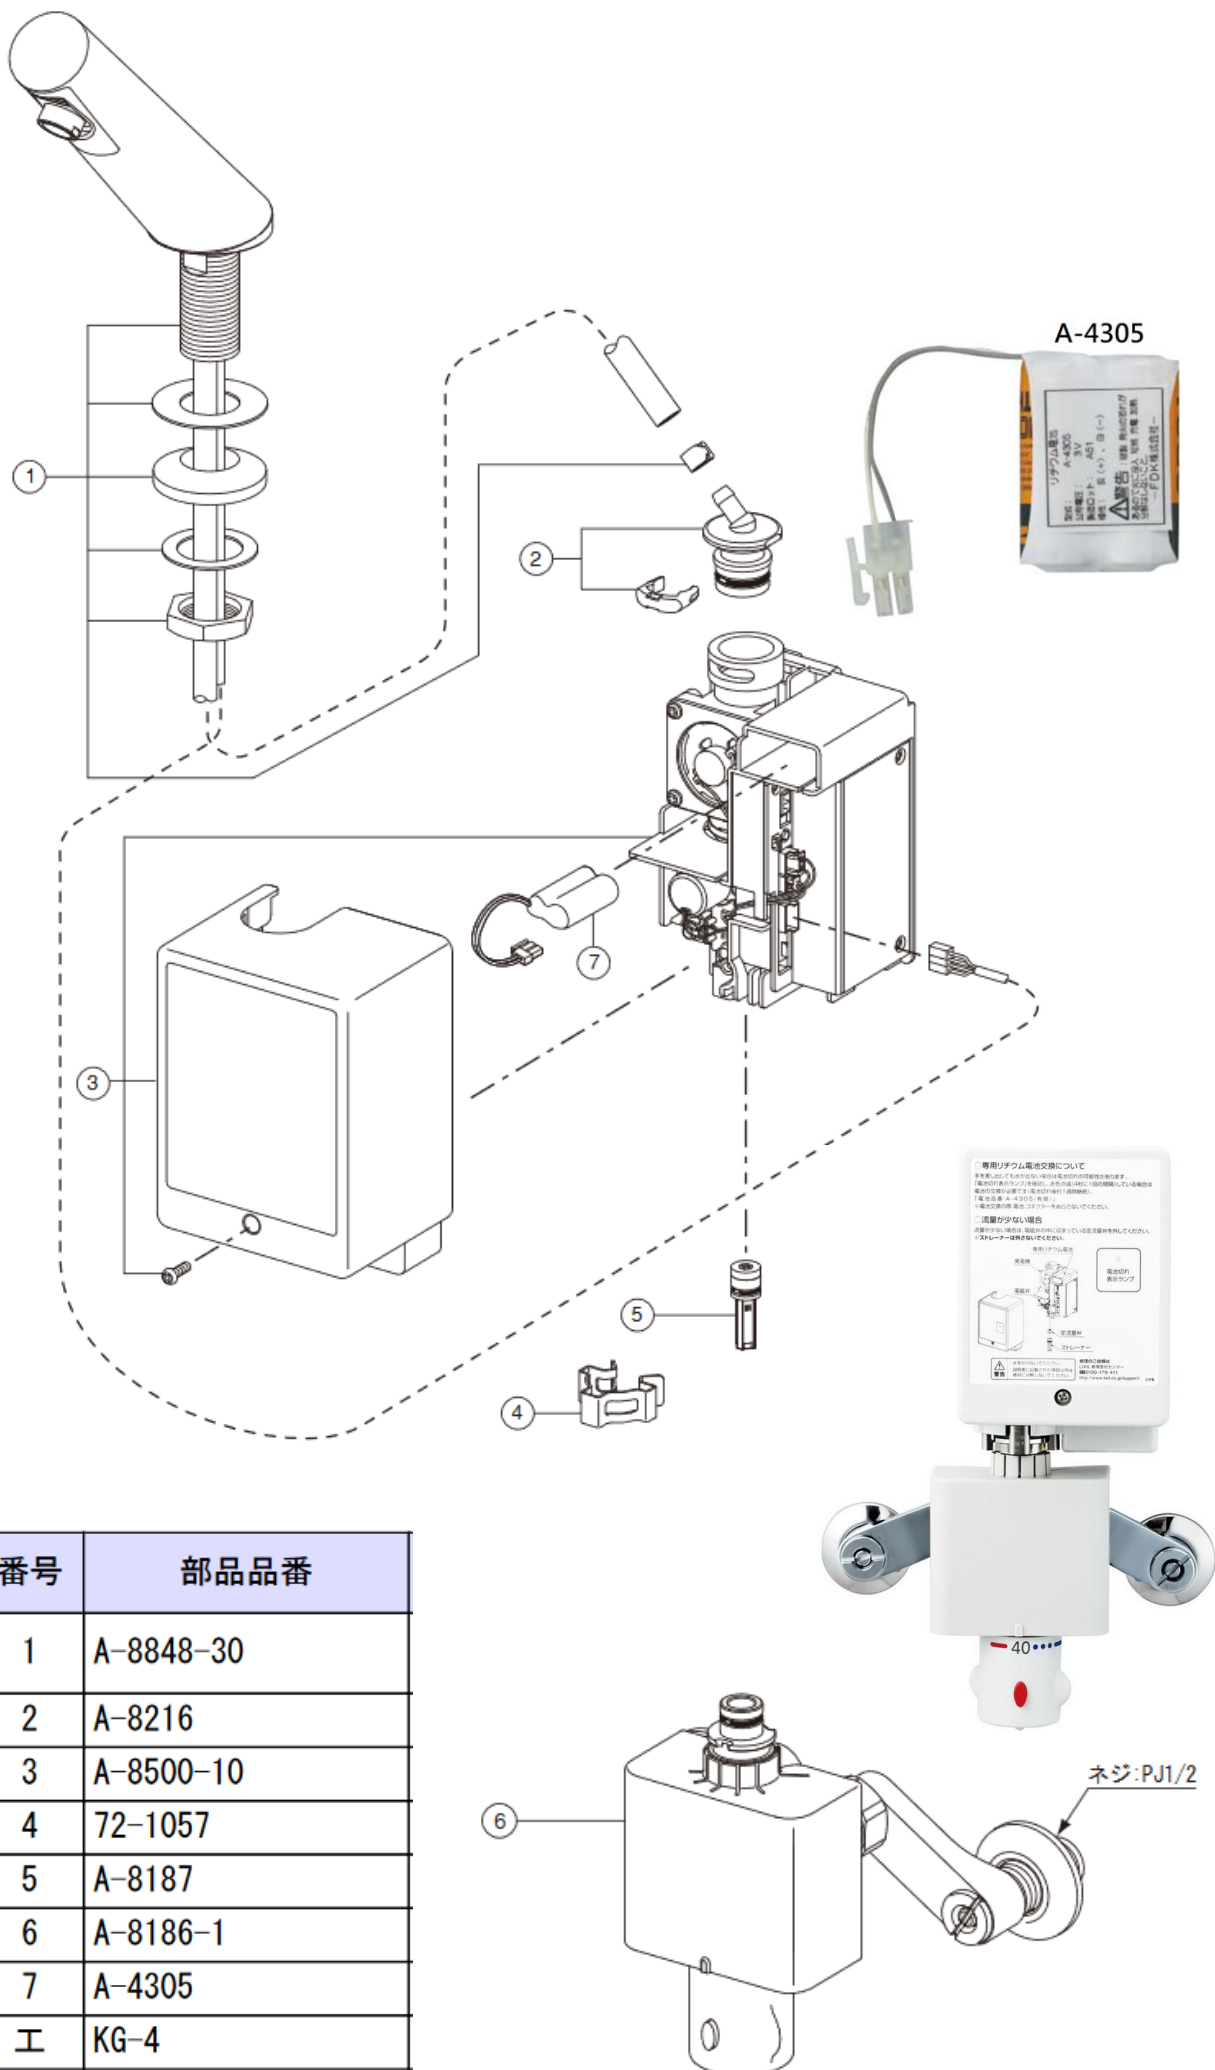

番号	部品品番
1	A-8848-30
2	A-8216
3	A-8500-10
4	72-1057
5	A-8187
6	A-8186-1
7	A-4305
工	KG-4

註冊號碼 (Registration No.):

TM 20-0102



自願參與用水效益標籤計劃 - 水龍頭
Voluntary Water Efficiency Labelling Scheme - Water Taps



茲證明

This is to certify that

將下列水龍頭在本計劃內註冊：
has registered the following water tap under this scheme :

牌 子 / Brand	:	LIXIL INAX
型 號 / Model	:	AM-200TC + A-8187
種 類 / Type	:	Mixing
原產地 / Country or Region Origin	:	Japan (Mixer & Flow Controller)

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label :



滴水點

Water droplet(s)

用水效益級別

Water Efficiency Grade :

1

with additional merit*

耗水量

Water Consumption :

2.9

公升/分鐘

litres/minute

*with additional merit of "Automatic closing mechanism"

簽發日期:

Date of Issue:

18 June 2020



水務署

Water Supplies Department



水務署署長(張業駒代行)
for Director of Water Supplies



水務署
Water Supply



總部 Headquarters

香港灣仔告士打道七號八樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (2) in WSD 3321/18 Pt.1 T/J(1310)
Our ref.
來函檔號 :
Your ref.

電話 :
Tel.
傳真 : 2824 0578
Fax.

4 January 2019

Approval of "LIXIL INAX" Sensor Mixer (General Acceptance No. C20190017)

Your letter ref. WRC/2008 dated 23 November 2018 refers.

Having considered the test reports ref. J23148A and J21657r1 issued on 16 November 2018 and 20 April 2018 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: LIXIL Corporation
Country of Origin: Japan
Brand: LIXIL INAX
Details of Fitting: 1/2" Electronic sensor basin mixer with 1 no. of rubber hose
Model: AM-200TC
Body Markings: LIXIL
Expiry Date: 28 August 2022 (for mixer + hose)



This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"A stop cock or gate valve must be installed at the upstream of the fitting for manual isolation of water supply."

"The main voltage operated sensor valve should comply with the electricity safety regulation for applications in bathroom, toilet etc." AND

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless other specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
 ME/MC] - with soft copy only