



Since 1949

## Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong


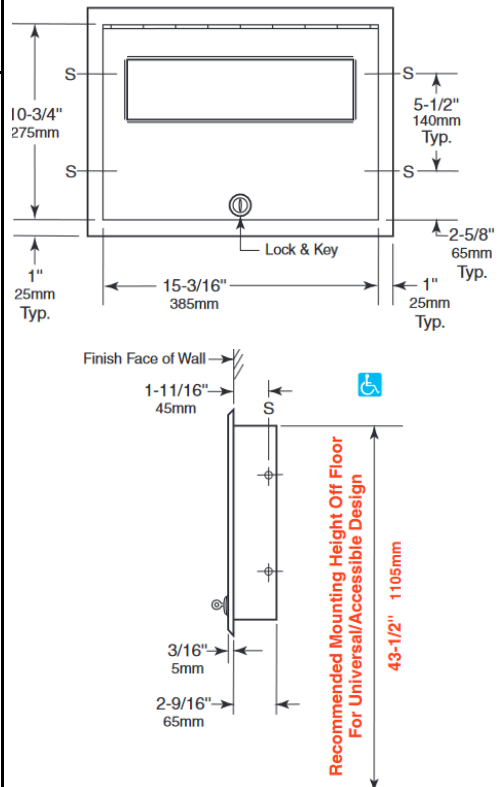
Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

### SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) "Classic Series" Recessed toilet seat cover dispenser	Illustration/ Drawing
Dimensions	L435 x W70 x H325 mm	
Model	B-301	
Material/ Finish	Heavy-Gauge Stainless Steel./ Satin Finish	
Manufacturer	Bobrick Washroom Equipment Inc. (USA)	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
<b>MATERIALS:</b> <b>Cabinet</b> — 18-8, type-304, heavy-gauge stainless steel. All-welded construction. <b>Flange</b> — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn and beveled, one-piece, seamless construction. <b>Door</b> — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with a full-length, stainless steel piano-hinge. Beveled opening. Equipped with a tumbler lock keyed like other Bobrick washroom accessories. <b>OPERATION:</b> Dispenses single- or half-fold paper toilet seat covers. To fill dispenser, door unlocks with key provided. Capacity: 500 toilet seat covers. <b>INSTALLATION:</b> Provide framed rough wall opening 15-5/8" wide x 11-1/4" high (395 x 285mm). Minimum recessed depth required from finish face of wall is 2-5/8" (67mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits in wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with four #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished). <b>SPECIFICATION:</b> Recessed toilet-seat-cover dispenser shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Flange shall be drawn and beveled, one-piece, seamless construction. Door shall be secured to cabinet with a full-length, stainless steel piano-hinge and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Dispenser shall have a capacity of 500 paper toilet seat covers.		<p><b>Rough Wall Opening</b> 15-5/8" (395mm) wide 11-1/4" (285mm) high 2-5/8" (67mm) minimum recessed depth</p>  <p>10-3/4" 275mm</p> <p>5-1/2" 140mm Typ.</p> <p>2-5/8" 65mm Typ.</p> <p>1" 25mm Typ.</p> <p>15-3/16" 385mm</p> <p>Lock &amp; Key</p> <p>Finish Face of Wall</p> <p>1-11/16" 45mm</p> <p>3/16" 5mm</p> <p>2-9/16" 65mm</p> <p>Recommended Mounting Height Off Floor For Universal/Accessible Design</p> <p>43-1/2" 1105mm</p>

#### Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.