

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Website: www.acmesanitary.com.hk

]	PROJECT	REF	REV	ITEM CODE	
L	OCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) Stainless steel surface- mounted waste receptacle with disposal door in satin finish			
Dimensions	L360 x W115 x H715 mm			
Model	B-35639			
Material/ Finish	Stainless Steel / Satin Finish			
Manufacturer	Bobrick Washroom Equipment Inc. (USA)			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012			
E-mail	acme@acmesanitary.com.hk			
Website	www.acmesanitary.com.hk			

MATERIALS:

Cabinet — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin-finish.

Skirt — 18-8, Type-304, stainless steel with satin-finish.

Door — 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin-finish. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with one tumbler lock keyed like other Bobrick washroom accessories. Self-closing push door mounted on continuous stainless steel piano hinge. Disposal Door — 18-8, Type-304, heavy-gauge stainless steel with satin finish. Secured to cabinet with spring-loaded, full length stainless steel piano hinge. Equipped with International graphic symbol identifying waste disposal.

Waste Receptacle — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Removable for ser vicing. Capacity: 3-gal. (11.3-L).

OPERATION: To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.

INSTALLATION: Mount unit on wall with four #10 x 1-1/4" (4.8 x 32mm) sheet-metal screws (not furnished) at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between cabinet and finish face of wall.

Replacement Parts:

 Knob Latch
 314370-22

 Skirt Replacement Kit
 35639-53


 Door Replacement Kit
 35639-73

 Waste Receptacle Replacement Kit
 35639-83

 International Label
 3653-44

 Lock and Key
 39003-21

SPECIFICATION: Surface-mounted waste receptacle with disposal door shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door shall be Type-304, 18 gauge (1.2mm) secured to cabinet with a concealed, full-length stainless steel piano-hinge, cable doorswing limiter and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Waste receptacle shall be Type-304, heavy-gauge stainless steel. All-welded construction with a capacity of 3-gal. (11.3-L).

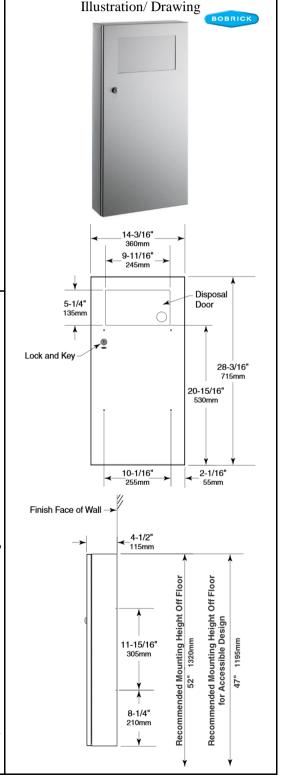

Note: