



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


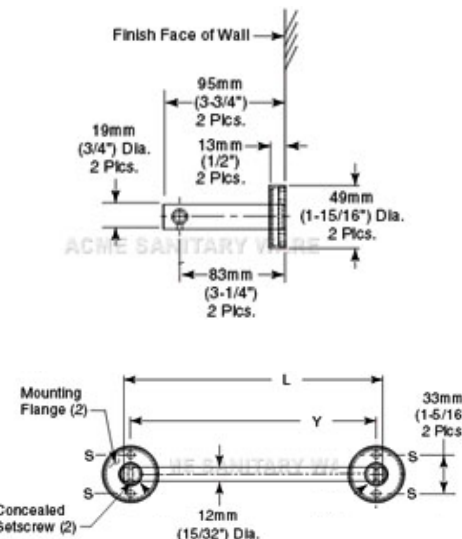
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) Surface mounted towel bar	Illustration/ Drawing															
Dimensions	610mm Long																
Model	B-545 X 24																
Material/ Finish	Bright Polished Stainless Steel																
Manufacturer	Bobrick Washroom Equipment Inc. (USA)																
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																
E-mail	acme@acmesanitary.com.hk																
Website	www.acmesanitary.com.hk																
MATERIALS: Post — 18-8, Type-304, 19mm (3/4") diameter, solid stainless steel rod. Post and Concealed Mounting Threaded Flange are machined as one piece. Bar — 18-8, Type-304, 12mm (15/32") diameter, solid stainless steel rod. Secured to Posts with two(2) concealed set screws. Concealed Mounting Threaded Flange — 18-8, Type-304, 6mm (7/32") thick, stainless steel plate with thread on outside edge for fastening cover. 46mm (1-13/16") outside diameter with two holes for attachment to wall. Threaded Flange Cover — 18-8, Type-304, 1mm (17-gauge), machined stainless steel. 49mm (1-15/16") diameter 13mm (1/2") deep. Cover fastens over mounting flange to conceal mounting screws.																	
INSTALLATION: For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws (not furnished). For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws (not furnished), or provide 3mm (1/8") toggle bolts or expansion bolts. For partitions with particle-board or other solid core, secure with sheet-metal screws (not furnished), or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provides a solid backing into which the sheet-metal screws (not furnished) can be secured. NOTE: centerline-to-centerline of mounting flanges must be within 2mm (1/16") of the Y dimension given.																	
SPECIFICATION: Towel bar shall be Type-304 stainless steel with _____ (insert one satin finish or bright polished) finish. Towel bar shall have two (2) 19mm (3/4") diameter posts. Bar shall be 12mm (15/32") diameter secured to post with two (2) concealed set screws. Concealed mounting flange shall be 6mm (7/32") thick stainless steel plate, 46mm (1-13/16") outside diameter and equipped with two screw holes for attachment and thread on outside edge to fasten cover. Threaded flange cover shall be 1mm (17-gauge) stainless steel, 49mm (1-15/16") diameter and shall fasten over mounting flange to conceal mounting screws. Post and mounting flange are to be machined as one piece.																	
			STANDARD STOCK SIZES														
		<table><tr><th>Model No.</th><th>Bar Length L</th><th>Centerline-to-Centerline Y</th></tr><tr><td>B-545 x 18</td><td>460mm (18")</td><td>450mm (17-5/8")</td></tr><tr><td>B-545 x 24</td><td>610mm (24")</td><td>600mm (23-5/8")</td></tr><tr><td>B-5456 x 18</td><td>460mm (18")</td><td>450mm (17-5/8")</td></tr><tr><td>B-5456 x 24</td><td>610mm (24")</td><td>600mm (23-5/8")</td></tr></table>	Model No.	Bar Length L	Centerline-to-Centerline Y	B-545 x 18	460mm (18")	450mm (17-5/8")	B-545 x 24	610mm (24")	600mm (23-5/8")	B-5456 x 18	460mm (18")	450mm (17-5/8")	B-5456 x 24	610mm (24")	600mm (23-5/8")
Model No.	Bar Length L	Centerline-to-Centerline Y															
B-545 x 18	460mm (18")	450mm (17-5/8")															
B-545 x 24	610mm (24")	600mm (23-5/8")															
B-5456 x 18	460mm (18")	450mm (17-5/8")															
B-5456 x 24	610mm (24")	600mm (23-5/8")															

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment