

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Website: www.acmesanitary.com.hk

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) Automatic lavatory-mounted foam soap dispenser in bright polished chrome plated plastic DC supply			
Dimensions	Refer to drawing			
Model	B-8263.18			
Material/ Finish	Bright Polished Chrome Plated Plastic			
Manufacturer	Bobrick Washroom Equipment Inc. (USA)			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012			
E-mail	acme@acmesanitary.com.hk			
Website	www.acmesanitary.com.hk			

MATERIALS:

Spout Cover Assembly — Bright Polished chrome plated plastic with LED light indicators. Red blinking LED indicates soap level is low, Yellow blinking LED indicates battery life is low. Equipped with integral plastic shank.

Motor Assembly — Water resistant, plastic construction, fits onto bottom of shank and top of soap refill. Battery Pack — Water resistant, plastic material, holds 4 Alkaline "D" Cell Batteries. Batteries are included in Model B-8263.18 Starter Kit only. Average battery life is 90,000 cycles or 2 years.


Soap Refill — OneShot® Soap Refill. Translucent, shatter-resistant polyethylene bottle. Includes new supply tube and pump mechanism in each refill. Soap refill available in 27-fl oz (800ml) capacities. One 27-fl oz (800ml) bottle of Hand Soap with Moisturizers is included in Model B-8263.18 only. OneShot® is a registered trademark of Rubbermaid Commercial Products.

Optional Spacer — Plastic spacer is included for mounting dispenser when sink rim is 3/4" (19mm) high or greater.

OPERATION: Place hand under soap spout for approximately 2 seconds. Spout will dispense controlled amount (0.8ml) of Hand Soap with Moisturizers or Free'n Clean Soap. 27-fl oz (800ml) soap refill provides 1000 hand washes. Motor assembly is preset for 27-fl oz (800ml) soap refill. Once a new soap refill is connected, pressing the red reset button automatically resets the low soap indicator LED and primes the new soap refill.

INSTALLATION: Unit is designed for installation in 15/16" to 1-1/4" (24 to 32mm) diameter hole in porcelain-enameled steel, cast iron or vitreous-china lavatories, as well as in countertops adjacent to lavatories. Unit may be mounted in unused faucet hole or through special hole requisitioned when lavatory is ordered from manufacturer (specify punching location). Shank accommodates maximum 2" (50mm) mounting thickness. Clearance required for soap refill bottle and motor housing is 5" (125mm) for the 27-fl oz (800ml) soap refill. (1600ml) soap refill bottle and motor housing. Place 4 "D" Cell Batteries (included in Model B-8263.18 only) into battery pack.

SPECIFICATION: Automatic Lavatory-Mounted Foam Soap Dispenser shall dispense controlled amount (0.8ml) of Hand Soap with Moisturizers or Free 'n Clean Soap or Hand Soap. Spout cover assembly to be Bright Polished chrome plated plastic. Meets accessible design standards. Unit shall have blinking LED indicators to show low soap level and low battery life. Shank shall accommodate mounting thicknesses up to 2" (50mm). Translucent, shatter-resistant polyethylene soap refill (800ml soap refill included in model B-8263.18 only) shall have capacities of 27-fl oz (800ml).

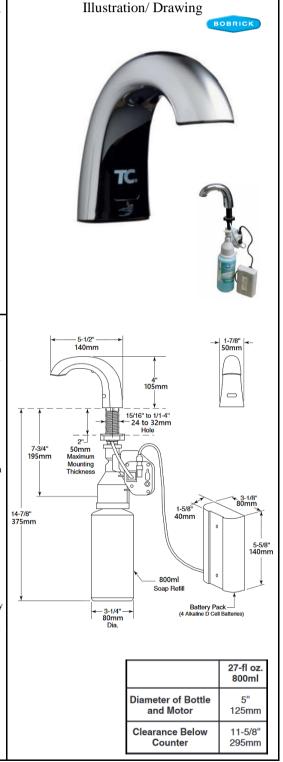

Note: