



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions Mediclinics (Spain) Swing up bar, stainless

steel AISI 304 satin

Dimensions L852 x W100 x H300 mm

Model BG0850CS

Material/ Finish Satin Finish

Manufacturer Mediclinics, S.A. (Spain)

Supplier Acme Sanitary Ware Co. Ltd

Mr. Eric Wong/ Mr. Don Yuen

Contact Tel/Fax (852) 2388-7171 / (852) 2710-8012

E-mail acme@acmesanitary.com.hk
Website www.acmesanitary.com.hk

Components and Materials

TUBING:made of a 32 mm diametertube, seamless construction. Fixed to the wallplate through two gusset plates and by means of an M8x45 screw, which performs the functions of pivot axis of the swing grabbar. The swinging point is reinforced by means of a double tube.

WALL PLATE:made of a 3 mm thickplate. Two 3 mm thick gusset plates, welded to the plate, perform the function of supporting the pivot axis of the folding bar. The wall mounting plate also has 6 Ø 6.5 mm countersunk holes for fixing the bar to the wall. Compatible with the installation of the Mediclinics' grab bars BG0900.

PAPER ROLLDISPENSER:made of a 10 mm diameter rod and welded to the crosspiece


General description

Safety vertical swing grab bar with a built-in toilet paper holder, made of a 32 mm diameter tube that provides rigid support where it is needed -on one or both sides of the toilet. It consists of a "U" shape tube, a paper roll holder and a heavy-duty wallplate,3mm thick, with


Safety swing-up position that locks the bar in vertical position, for when not in use, preventing accidental collapse.

Designed to increase accessibility and safety for people with a variety of disabilities or mobility difficulties, these grab bars are ideal in public handicapped toilets, in private homes, assisted living facilities, hospitals, and nursing homes.

Optionally, they have a kit to avoid electrical conductivity (code KA0060). Wall mounting bolts and screws for brick wall included








Note



- Safety vertical swing grab bar with a built-in toilet paper holder, made of a 32 mm diameter tube that provides rigid support where it is needed on one or both sides of the toilet.
- It consists of a "U" shape tube, a paper roll holder and a heavy-duty wall plate, 3 mm thick, with 6 attachment points.
- Safety swing-up position that locks the bar in vertical position, for when not in use, preventing accidental collapse.
- Designed to increase accessibility and safety for people with a variety of disabilities or mobility difficulties, these grab bars are ideal in public handicapped toilets, in private homes, assisted living facilities, hospitals, and nursing homes.
- Optionally, they have a kit to avoid electrical conductivity (code KA0060).
- Wall mounting bolts and screws for brick wall included.



Fix the swing-up grab bar to the wall through the 6 holes of the wall plate, using the screws provided and taking into account the distances of the points indicated by an "S" in the following figure:

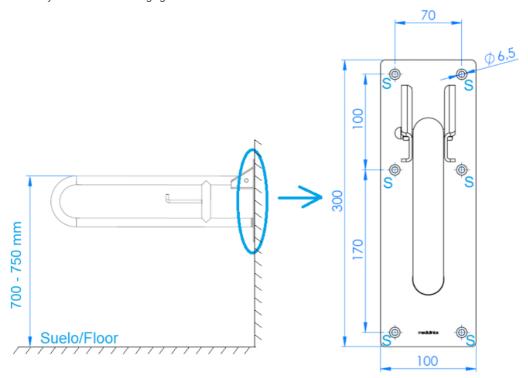

It is not recommended to install the Mediepoxy line bars in places where they may be in direct contact with water, in damp and/or chlorinated environments.

Mediclinics is not responsible for corrosion that may appear on the bars caused by abrasion on the anchorage points because of an improper installation.

