



# Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
E-mail: acme@acmesanitary.com.hk  
Website: www. acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Kims (PRC) plastic low-level tank with side inlet fittings & flush pipe	Illustration/ Drawing
Dimensions	Refer to drawing	
Model	C-828AL	
Material/ Color	Plastic/ White	
Manufacturer	Kims (PRC)	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
Remarks	(For reference only. The actual catalogue will be submitted later)	

Note:

\* All information of the above is for reference only. No prior notice is made if any changes.

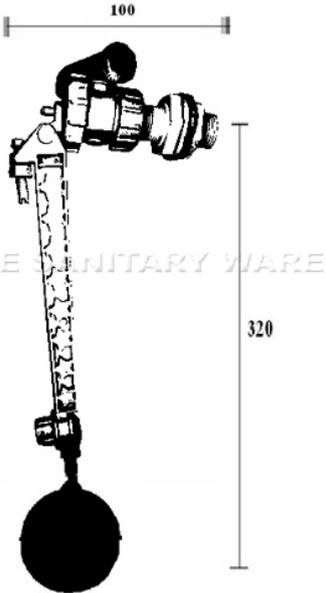


# Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
E-mail: acme@acmesanitary.com.hk  
Website: www. acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	KIMS (PRC) side inlet float operated	Illustration/ Drawing
Model	C-3134	 
Material	Plastic	
Manufacturer	KIMS (PRC)	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

Note:

\* All information of the above is for reference only. No prior notice is made if any changes.

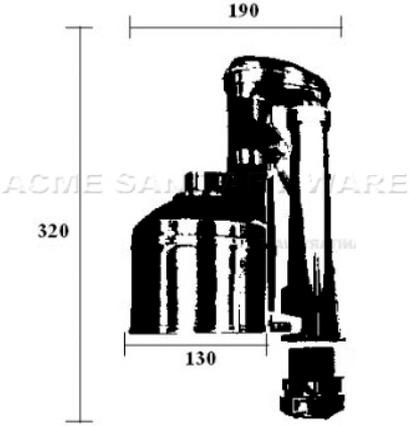


# Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong  
Tel: 2388 7171 Fax: 2710 8012  
E-mail: acme@acmesanitary.com.hk  
Website: www. acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	KIMS (PRC) Plastics 2-part round syphon flush valve	<p>Illustration/ Drawing</p>  
Model	B05-505	
Material	Plastic	
Manufacturer	KIMS (PRC)	
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	

Note:

\* All information of the above is for reference only. No prior notice is made if any changes.



水務署  
Water Supplies Department

香港灣仔告士打道七號入境事務大樓  
Immigration Tower, 7 Gloucester Road, Hong Kong

電子郵遞  
e-mail wsdinfo@wsd.gov.hk

電話  
Telephone 2829 4367

圖文傳真  
Facsimile 2824 0578

檔號  
Reference (9) in WSD 3321/15 Pt.1 T/J(345)

12 January 2016

### Approval of "KIMS" Float Operated Valve

Your letters ref. KS-11236 dated 17 September 2015 and ref. KS-11256 dated 18 November 2015 refer.

Having considered test report ref. 140923ST14029A issued on 9 November 2015 by Fugro Technical Services Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** Kimsion Plastic & Metal Manufacturing Ltd.  
**Country of Origin:** China  
**Brand:** Kims  
**Details of Fitting:** 1/2" Side inlet float operated valve  
**Model:** C-3134  
**Body Markings:** Logo of "Kims" on body  
**Expiry Date:** 12 June 2019

**Proviso:** As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The maximum flushing cistern volume including that of dual flush cisterns for use in conjunction with the fitting shall not exceed 7.5 litres per flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND


"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the Acceptance Reference Number at the bottom of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms. K L FOK at tel. no. 2829 5657.

Yours faithfully,



(LAM Ching Man)  
for Water Authority

c.c. WSD 3321/1/82 ] - without catalogue  
E/CS(TS)1 ]



水務署  
Water Supplies Department

香港灣仔告士打道七號入境事務大樓  
Immigration Tower, 7 Gloucester Road, Hong Kong

電子郵遞  
e-mail      wsdinfo@wsd.gov.hk

電話  
Telephone      2829 4367

圖文傳真  
Facsimile      2824 0578

檔號  
Reference      ( 2 ) in WSD 3321/16 Pt.1 T/J(818)

6 June 2016

### Approval of "KIMS" Flush Valve

Your letter ref. KS-11322 dated 19 May 2016 refers.

Having considered test report ref. 160361ST160165 issued on 16 May 2016 by the Fugro Technical Services Limited, this Authority accepts that the fitting described below comply with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** Dongguan Xin Tian Plastic Products Co., Ltd.

**Country of Origin:** China

**Brand:** Kims

**Details of Fitting:** 1½" Plastic 2-part round syphon flush valve

**Model:** B05-505

**Body Markings:** Logo of "Kims"

**Expiry Date:** 24 April 2021

**Proviso:** As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The maximum flushing cistern volume including that of dual flush cisterns for use in conjunction with the fittings shall not exceed 7.5 litres per flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the Acceptance Reference Number at the bottom of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Terry KUNG at tel. no. 2294 2656.

Yours faithfully,



(LAM Ching Man)  
for Water Authority

c.c. WSD 3321/1/82 ] - without catalogue  
ME/CS(MC) ] - with soft copy only