



Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


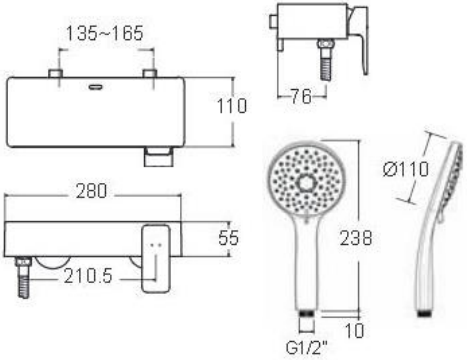
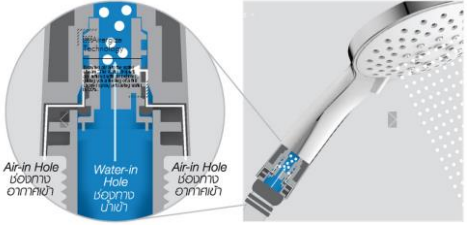
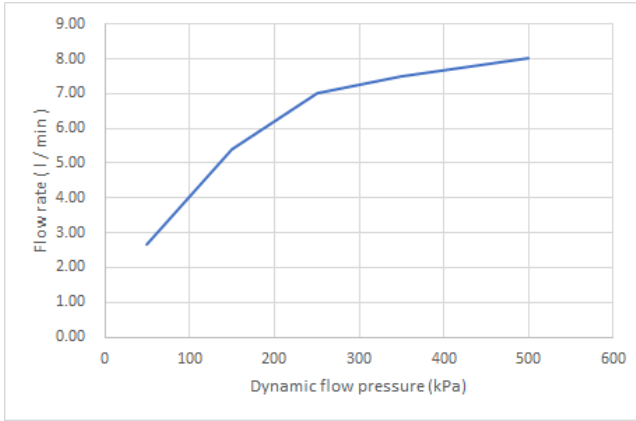

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

American Standard

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) "Acacia Evolution" Exposed shower mixer with "Airnergise Technology" hand shower to save 20% water savings ; nominated flow rate 6.6 L/min in WELS Grade 1; Registration No. SB 18-0087	Illustration/ Drawing											
Dimensions	L210 x W110 x H55 mm												
Model	CF-1312.701.50												
Material/Finish	Brass/ Chrome Plated												
Manufacturer	American Standard (PRC)												
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen												
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012												
E-mail	acme@acmesanitary.com.hk												
Website	www.acmesanitary.com.hk												
• Design Philosophy: American Standard products are designed to express the uniqueness of your personality Our design philosophy focuses on total relaxation, maximum utility and technological innovations													
			 A LUXURIOUS SHOWER WITH 20% WATER SAVINGS Airnergise Technology in Acacia Evolution handshower provides you with a luxurious shower experience. The technology works by drawing air into the water stream via a cleverly concealed opening at the bottom of the handshower. The water droplets are infused with air bubbles, giving you a feeling of a full shower spray, yet saving water by 20%.										
<table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td></tr><tr><td>Flow rate (l / min)</td><td>2.68</td><td>5.40</td><td>7.00</td><td>7.50</td><td>8.00</td></tr></table>				Dynamic flow pressure (kPa)	50	150	250	350	500	Flow rate (l / min)	2.68	5.40	7.00
Dynamic flow pressure (kPa)	50	150	250	350	500								
Flow rate (l / min)	2.68	5.40	7.00	7.50	8.00								

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.): SB 18-0087




自願參與用水效益標籤計劃 - 沐浴花灑
Voluntary Water Efficiency Labelling Scheme - Showers for Bathing



茲證明
This is to certify that

將下列花灑在本計劃內註冊：
has registered the following shower under this scheme :

牌 子 / Brand	:	American Standard
型 號 / Model	:	CF-9H10.000.50
原產地 / Country or Region Origin	:	China

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:	 滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1
耗水量 <i>Water Consumption</i>	:	6.6 公升/分鐘 <i>litres/minute</i>

簽發日期: 27 April 2018
Date of Issue:



水務署
Water Supplies Department



水務署署長(周世威代行)
for Director of Water Supplies



水務署
Water Supplies Department

總部 Headquarters

香港灣仔告士打道七號入境事務大樓 48 樓

Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong



本署
Our r.
來函檔
Your ref.

321/2023 T/J(1136/2023)

電話
Tel.
傳真
Fax

: 2824 0578

31 January 2024



**Approval of “AMERICAN STANDARD” Shower Mixer
(General Acceptance No. C20240081)**

Your E-Application [file-id: ETJ-GA-20231027-156] dated 9 November 2023 and subsequent submissions received by this department up to 11 January 2024 refer.

Having considered the test report ref. 222320PC220526B issued on 14 December 2023 by Fugro Technical Services Limited, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer: Jiangmen LIXIL AS Sanitary Fitting Manufacturing Co Ltd

Country of Origin: the Mainland of China

Brand: American Standard

Details of Fitting: 1/2" Single lever shower mixer

Model: FFAS1312-701XXXBC0
(where "XXX" denotes the code of colour)

Body Markings: *American Standard*



Expiry Date: 11 July 2028

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply." AND

"The shower head or handspray should not be placed in submerged conditions and should be securely fixed to the original position after use."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr Albert CHOW at tel. no. 3583 4086.

Yours faithfully,



(Terry KUNG)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue
ME/MC] - with soft copy only