

## American Standard Raising The Standard

DEV	ITEM	
REV	CODE	

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) "Cygnet" Vitreous china close coupled 3/4.5L water- saving elongated toilet, universal trap with Anti-bacteria seat and cover and 435mm raised height		
Outlet	P-Trap, 190mm or Bottom outlet, 305mm		
Dimensions	L697 x W376 x H820 mm Raised height for bowl = 435mm		
Model	CP-3146.701.04 + CP-4146.020.04		
Material /Colour	Vitreous China/ White		
Manufacturer	American Standard (PRC)		
Source	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen		
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012		
E-mail	acme@acmesanitary.com.hk		
Website	www.acmesanitary.com.hk		

Anti-bac: An anti-bacterial glaze keeps the toilet clean and effectively inhibits bacteria growth that can cause bad odor. It's anti-bacterial effectiveness lasts as long as the lifetime of the product.

Water saving: Conserving water is as important to us as it is to you. After all, the less water you use, the more money you save. Choose 3/4.5 liters with each flush.

#### **Comfort Solution Seat:**

Top Fixed & Quick Release

Easily installed from the top of the toilet bowl.

Offers an innovative and fast way to replace the seat cover.


Slow Closing Seat & Cover

Silent and slow closing seat & cover, suitable for every household.

Comfort Seat

Ergonomic curves provides maximum comfort.

Raised height for toilet ceramic bowl to 43.5 cm, more comfortable sitting height.

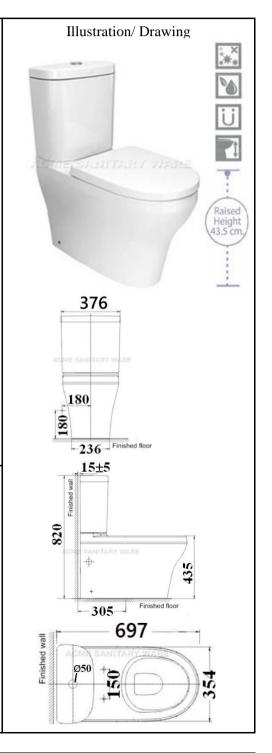

Note:

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.





## American Standard

Raising The Standard

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	


### SANITARY WARE SPECIFICATION SHEET

# Cygnet

## Collection

Inspired by the warmth and love of family life, the Cygnet collection displays thoughtful elements designed for family comfort in mind. Apart from soft minimalism, the height of the Cygnet toilet is raised to accommodate the needs of the elderly, pregnant members or the disabled. A perfect choice for families who want the bathroom to be a comfortable and inviting place for all.



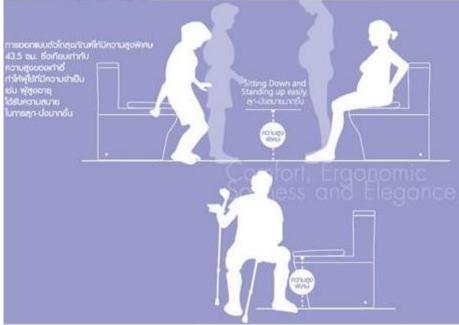



#### Comfort Solution Seat

- Top Fixed & Quick Release
- . Slow Closing Seat & Cover
- Comfort Seat



#### Raised Height

The bowl of toilet is designed for 43.5 cm tall which matches with the height of regular chair making all family members feel more comfortable especially elderly people.



#### Anti-bac

Anti-bacteria additive, added into the bathroom products, are safe for human beings and inhibits the bacteria for a long time. Its anti-bacteria effectiveness lasts as long as the lifetime of the product.



#### Water Saving

Alternatives for 3 or 4.5 liters flushing for a toilet

Note:

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	WDI (PRC) Adjustable plastic inlet valve	Illustration/ Drawing
Dimensions	Refer to drawing	
Model	B3800E	
Material	Plastic	
Manufacturer	WDI (PRC)	
Supplier	Acme Sanitary Ware Co. Ltd	
	Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	60 98 26.5 82 000 000 000 000 000 000 000 000 000 0

Note: The color of the above fittings may be varied without further notice.

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.



48/r, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 Our ref. 來函檔號

Your ref.

: (4) in WSD 3321/2020 T/J(401/2020)

電話 Tel

: 2824 0578

23 June 2020



## Approval of "WDI" Float Operated Valve (General Acceptance No. C20200498F)

Your letters ref. BE/L20319/20 and BE/L20359/20 dated 15 April 2020 and 22 May 2020 respectively refer.

Having considered the test report ref. RACA059rl issued on 19 May 2020 by Ideal Test Consultants Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

WDI (Xiamen) Technology Inc

Country of Origin:

the Mainland of China

Brand:

WDI

**Details of Fitting:** 

1/2" Plastic float operated valve

Model:

B3800E

**Body Markings:** 

WDI

**Expiry Date:** 

25 March 2025





Proviso:

As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,

(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 332

WSD 3321/1/82 ] - without catalogue

ME/MC

] - with soft copy only



PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	WDI (PRC) Adjustable 3/4.5L dual flush valve	Illustration/ Drawing
Dimensions	Refer to drawing	
	D 1000	Dual
Model	B4900	
Material	Plastic	
Manufacturer	WDI (PRC)	
Supplier	Acme Sanitary Ware Co. Ltd	
	Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
		\$55E

Note: The color of the above fittings may be varied without further notice.

<sup>\*</sup> All information of the above is for the reference only. No prior notice is made if any changes.



本署檔號

Our ref. 來函檔號

Your ref.

: (2) in WSD 3321/2020 T/J(918/2020)

電話

Tel.

傳真 For

2824 0578

15 September 2020

## Approval of "WDI" Flush Valve (General Acceptance No. C20200804F)

Your letter ref. BE/L20438/20 dated 21 July 2020 refers.

Having considered the test report ref. RACA057rl issued on 17 July 2020 by Ideal Test Consultants Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

ECO (Xiamen) Technology Inc

Country of Origin:

the Mainland of China

Brand:

WDI

Details of Fitting:

2" Plastic dual flush valve

Model:

B4900

**Body Markings:** 

WDI B4900

**Expiry Date:** 

2 April 2025





Proviso:

As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

> "The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

> "The fitting should be used within the range of working pressures specified by the manufacturer." AND

> "The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,

(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82 ] - without catalogue

ME/MC

] - with soft copy only