



Since 1949

**Acme Sanitary Ware Co. Ltd.**

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

**EMCA**

|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

## SANITARY WARE SPECIFICATION SHEET

|   |  |  |
|---|--|--|
| Item Descriptions   | EMCA (PRC) Vitreous china pedestal washbasin for <b>kid</b> with <b>600mm high</b> | Illustration/ Drawing<br>                        |
| Model   | EM0406.206   |  |
| Dimensions  | W400 x D400 x H600 mm  |  |
| Manufacturer  | EMCA (PRC)   |  |
| Source  | Acme Sanitary Ware Co. Ltd<br>Mr. Eric Wong/ Mr. Don Yuen                          |  |
| Contact Tel/Fax   | (852) 2388-7171 / (852) 2710-8012  |  |
| E-mail  | acme@acmesanitary.com.hk   |  |
| Website   | www.acmesanitary.com.hk  |  |
|   |  |  <p><b>Top view</b></p> <p><b>Back view</b></p> |

Note:

Recommended American Standard "Sensor Faucet" WF-8805.000.50 shown on the photo

\* All information of the above is for the reference only. No prior notice is made if any changes.



**Acme Sanitary Ware Co. Ltd.**

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

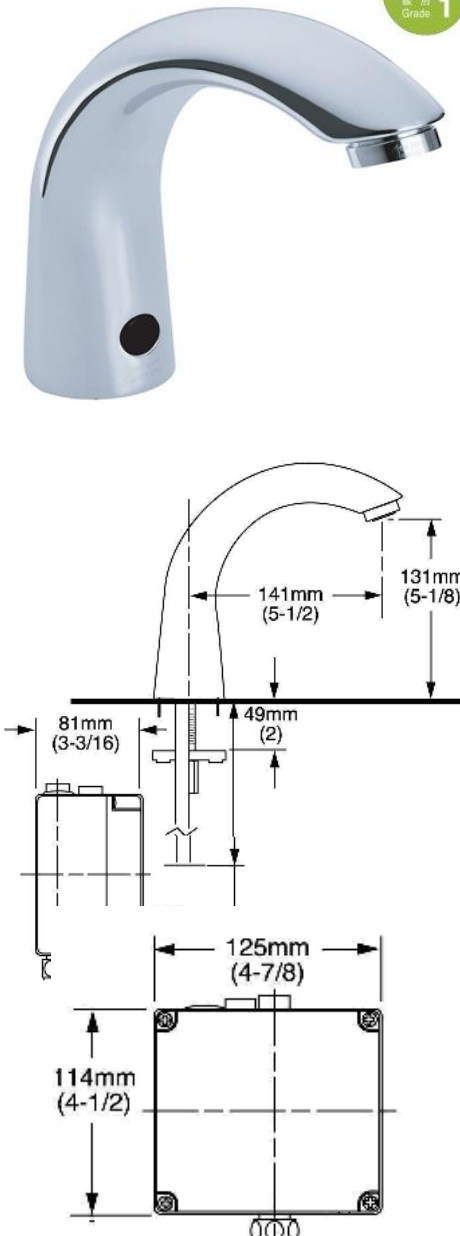
Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

*American Standard*

|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

## SANITARY WARE SPECIFICATION SHEET

|  |  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
|--|--|------|------|------|------|---|----------------------------|-------|----------------|-------|---------|----------------------|--------------------------------|-------|--------|------|------|----------------|---------------------|----------|-------|---------|---------------|-------------------|-----|
| Item Descriptions  | American Standard "Selectronic" (PRC)<br>Chrome plated casted spout sensor faucet;<br>nominated flow rate <b>1.7 L/min</b> in WELS<br><b>Grade 1</b> ; Registration No. TN 22-0016 |      |      |      |      | <div>Illustration/ Drawing</div> <div></div> |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Dimensions   | Refer to drawing   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Model  | WF-8815.000.50 (AC supply sensor tap)<br>403986040 (Aerator)   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Finish   | Chrome Plated  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Manufacturer   | American Standard (PRC)  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Source   | Acme Sanitary Ware Co. Ltd<br>Mr. Eric Wong / Mr. Don Yuen   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Contact Tel/Fax  | (852) 2388-7171 / (852) 2710-8012  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| E-mail   | acme@acmesanitary.com.hk   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Website  | www.acmesanitary.com.hk  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| <table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td></tr><tr><td>Flow rate (l / min )</td><td>1.53</td><td>1.75</td><td>1.83</td><td>1.89</td><td>1.90</td></tr></table>   |  |      |      |      |      | Dynamic flow pressure (kPa)   | 50                         | 150   | 250            | 350   | 500     | Flow rate (l / min ) | 1.53                           | 1.75  | 1.83   | 1.89 | 1.90 |                |                     |          |       |         |               |                   |     |
| Dynamic flow pressure (kPa)  | 50   | 150  | 250  | 350  | 500  |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Flow rate (l / min )   | 1.53   | 1.75 | 1.83 | 1.89 | 1.90 |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| <table><tr><td>Sensor</td><td>Infrared Sensor</td></tr><tr><td>Valve</td><td>Solenoid Valve</td></tr><tr><td>Power</td><td>200V AC</td></tr><tr><td>Operating range</td><td>5mm to 250mm max ( Default 120</td></tr><tr><td>Inlet</td><td>G 1/2"</td></tr><tr><td></td><td></td></tr><tr><td>Water pressure</td><td>0.05 MPa ~ 0.75 MPa</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Surface</td><td>Chrome Plated</td></tr><tr><td>Origin of Country</td><td>PRC</td></tr></table> <div>Inner Box size (mm) : 310*210*120<br/>Carton size (mm) : 440*330*360<br/>Q' ty / Box: 6 pcs</div> |  |      |      |      |      | Sensor  | Infrared Sensor            | Valve | Solenoid Valve | Power | 200V AC | Operating range      | 5mm to 250mm max ( Default 120 | Inlet | G 1/2" |      |      | Water pressure | 0.05 MPa ~ 0.75 MPa | Material | Brass | Surface | Chrome Plated | Origin of Country | PRC |
| Sensor   | Infrared Sensor  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Valve  | Solenoid Valve   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Power  | 200V AC  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Operating range  | 5mm to 250mm max ( Default 120   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Inlet  | G 1/2"   |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
|  |  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Water pressure   | 0.05 MPa ~ 0.75 MPa  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Material   | Brass  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Surface  | Chrome Plated  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Origin of Country  | PRC  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| <table><tr><td>Surface Treatment : Ni&gt;=5.0u, Cr&gt;=0.2u</td></tr><tr><td>Life cycle : 200,000 cycle</td></tr></table>  |  |      |      |      |      | Surface Treatment : Ni>=5.0u, Cr>=0.2u  | Life cycle : 200,000 cycle |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Surface Treatment : Ni>=5.0u, Cr>=0.2u   |  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |
| Life cycle : 200,000 cycle   |  |      |      |      |      |   |                            |       |                |       |         |                      |                                |       |        |      |      |                |                     |          |       |         |               |                   |     |

Note:

\* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.): TN 22-0016




自願參與用水效益標籤計劃 - 水龍頭  
Voluntary Water Efficiency Labelling Scheme - Water Taps



This is to certify that

將下列水龍頭在本計劃內註冊：  
has registered the following water tap under this scheme :

|                                      |   |  |
|--------------------------------------|---|--|
| 牌子 / Brand                           | : | American Standard + Grohe                |
| 型號 / Model                           | : | WF-88X5.000.50 + 403986040               |
| 種類 / Type                            | : | Non-mixing                               |
| 原產地 / Country or Region Origin       | : | China (Tap)<br>Germany (Flow Controller) |
| X – denotes the type of power source |   |  |

|   |   |  |
|---|---|--|
| 在用水效益標籤上展示的標誌<br><i>Symbolic Presentation on the Water Efficiency Label</i> | : |  滴水點<br><i>Water droplet(s)</i> |
| 用水效益級別<br><i>Water Efficiency Grade</i>                                     | : | 1 with additional merit*   |
| 耗水量<br><i>Water Consumption</i>   | : | 1.7 公升/分鐘<br><i>litres/minute</i>  |

\*with additional merit of "Automatic closing mechanism"

簽發日期: 7 January 2022  
Date of Issue:



水務署  
Water Supplies Department



水務署署長(尤孝賢代行)  
for Director of Water Supplies



Department

香港入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : (6) in WSD 3321/2021 T/J(281/2021)  
Our ref.  
來函檔號 :  
Your ref.

電話 :  
Tel.  
傳真 : 2824 0578  
Fax.

6 October 2021

### Approval of "AMERICAN STANDARD" Sensor Tap (General Acceptance No. C20211086)

Your letter ref. WRC/2476 dated 29 January 2021 and subsequent submissions received by this department up to 30 August 2021 refer.

Having considered the test report ref. 25353r1 issued on 28 May 2021 by Nutek Systems (HK) Ltd. and WRAS certificate, this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** Jiangmen LIXIL AS Sanitary Fitting Manufacturing Co Ltd

**Country of Origin:** the Mainland of China

**Brand:** American Standard

**Details of Fitting:** 1/2" Deck mounted sensor tap with 1 no. of flexible hose approved by UK's WRAS under ref. 1909363

**Model:** WF-88X5.000.50  
(where "X" denotes the type of power source)

**Body Markings:** *American Standard*





**Expiry Date:** 30 September 2024

This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"A stop cock or gate valve must be installed at the upstream of the fitting for manual isolation of water supply." AND

"The main voltage operated sensor valve should comply with the electricity safety regulation for applications in bathroom, toilet etc."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fail to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Ms. Winnie LO at tel. no. 3583 4086.

Yours faithfully,



(Roger WONG)  
for Director of Water Supplies

Encl.

c.c.      WSD 3321/1/82   ] - without catalogue  
            ME/MC        ] - with soft copy only