



|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

**SANITARY WARE SPECIFICATION SHEET**

|                   |   |
|-------------------|---|
| Item Descriptions | EMCA (PRC) "Twist" Vitreous china <b>triple whirlpool</b> close-coupled rimless watercloset in horizontal outlet; dual flush fittings; <b>gravity curve flushing; anti-bacterial coating</b> ; top fixing thin soft-closing urea seat & cover; floor fixing kits; nominated flow rate <b>3/4.5 LPF</b> in WELS <b>Grade 1</b> ; Registration No. WC 22-0158 |
| Outlet            | H.O. Trapway 180mm<br>R.I. 220mm  |
| Dimensions        | L650 x W370 x H790 mm   |
| Model             | EM650P  |
| Material/ Colour  | Vitreous China/ White   |
| Origin            | PRC   |
| Source            | Acme Sanitary Ware Co. Ltd<br>Mr. Eric Wong/ Mr. Don Yuen   |
| Contact Tel/Fax   | (852) 2388-7171 / (852) 2710-8012   |
| E-mail            | acme@acmesanitary.com.hk  |
| Website           | www.acmesanitary.com.hk   |

**Illustration/ Drawing**

Plastic outlet connector

**P-Trap**

**S-Trap**

**Gravity Curve Flushing**

Flushing Performance  
4.5L/40 ply tissue

Flushing Performance  
6L/40 ply tissue

**Note:** Plastic outlet connector shall be bought separately.

\* All information of the above is for the reference only. No prior notice is made if any changes.



自願參與用水效益標籤計劃 - 水廁  
Voluntary Water Efficiency Labelling Scheme - Water Closets



註冊證書

茲證明


This is to certify that

Acme Sanitary Ware Company Limited

將下列水廁在本計劃內註冊：

has registered the following water closet under this scheme :

|                                |   |   |
|--------------------------------|---|---|
| 牌子 / Brand                     | : | EMCA + WDI                                  |
| 型號 / Model                     | : | EM650P-BOWL + EM650P-TANK + B4900H          |
| 種類 / Category                  | : | Close-coupled Suite                         |
| 原產地 / Country or Region Origin | : | China<br>(WC Pan, Cistern & Flushing Valve) |

|   |   |   |
|---|---|---|
| 在用水效益標籤上展示的標誌<br><i>Symbolic Presentation on the Water Efficiency Label</i> | : |  滴水點 <i>Water droplet(s)</i> |
| 用水效益級別<br><i>Water Efficiency Grade</i>                                     | : | 1   |
| 全沖水量<br><i>Water Flush Volume (Full)</i>                                    | : | 4.5 公升/沖廁 <i>litres/flush</i>   |
| 低沖水量<br><i>Water Flush Volume (Reduced)</i>                                 | : | 3.0 公升/沖廁 <i>litres/flush</i>   |

簽發日期:  
Date of Issue: 23 December 2022

 水務署  
Water Supplies Department



水務署署長(林麗恒代行)  
for Director of Water Supplies

+ 上述水廁具額外節水功能，即：重用洗盥水作沖廁用途。  
The above water closet is equipped with additional water saving feature, that is: re-use the water collected from wash basin for flushing purpose.



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

## SANITARY WARE SPECIFICATION SHEET

| Item Descriptions | WDI (PRC) Adjustable plastic inlet valve                  | Illustration/ Drawing |
|-------------------|---|-----------------------|
| Dimensions        | Refer to drawing  |                       |
| Model             | B3800E  |                       |
| Material          | Plastic   |                       |
| Manufacturer      | WDI (PRC)   |                       |
| Supplier          | Acme Sanitary Ware Co. Ltd<br>Mr. Eric Wong/ Mr. Don Yuen |                       |
| Contact Tel/Fax   | (852) 2388-7171 / (852) 2710-8012                         |                       |
| E-mail            | acme@acmesanitary.com.hk                                  |                       |
| Website           | www.acmesanitary.com.hk                                   |                       |



Note: The color of the above fittings may be varied without further notice.

\* All information of the above is for the reference only. No prior notice is made if any changes.





水務署  
Water Supplies Department

總部 Headquarters

灣仔告士打道七號入境事務大樓 48 樓

Registration Tower, 7 Gloucester Road, Wan Chai, Hong Kong



本署  
Our reg.  
來函編號  
Your ref.

3321/2020 T/J(401/2020)

電話 :  
Tel.  
傳真 : 2824 0578  
Fax.

23 June 2020



**Approval of "WDI" Float Operated Valve  
(General Acceptance No. C20200498F)**

Your letters ref. BE/L20319/20 and BE/L20359/20 dated 15 April 2020 and 22 May 2020 respectively refer.

Having considered the test report ref. RACA059r1 issued on 19 May 2020 by Ideal Test Consultants Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** WDI (Xiamen) Technology Inc  
**Country of Origin:** the Mainland of China  
**Brand:** WDI  
**Details of Fitting:** 1/2" Plastic float operated valve  
**Model:** B3800E  
**Body Markings:** WDI  
**Expiry Date:** 25 March 2025



**Proviso:** As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82 ] - without catalogue  
ME/MC ] - with soft copy only



# Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012



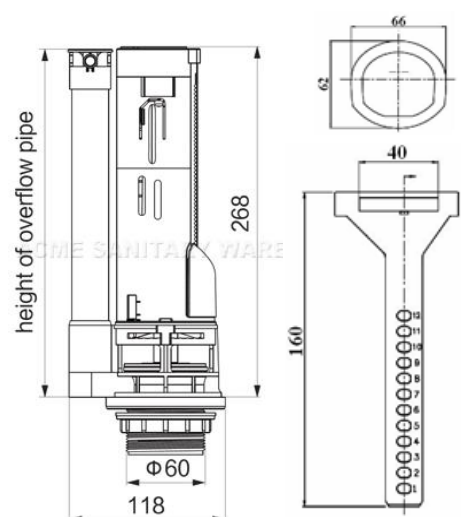

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

Since 1949

|          |  |      |  |     |           |  |
|----------|--|------|--|-----|-----------|--|
| PROJECT  |  | REF  |  | REV | ITEM CODE |  |
| LOCATION |  | DATE |  |     | PAGE      |  |

## SANITARY WARE SPECIFICATION SHEET

|  |  |   |
|--|--|---|
| <p><b>Item Descriptions</b></p> <p><b>Dimensions</b></p> <p><b>Model</b></p> <p><b>Material</b></p> <p><b>Manufacturer</b></p> <p><b>Supplier</b></p> <p><b>Contact Tel/Fax</b></p> <p><b>E-mail</b></p> <p><b>Website</b></p> | <p>WDI (PRC) Adjustable 3/6L dual flush valve with lockable design for cistern lid</p> <p>Refer to drawing</p> <p>B4900H</p> <p>Plastic</p> <p>WDI (PRC)</p> <p>Acme Sanitary Ware Co. Ltd<br/>Mr. Eric Wong/ Mr. Don Yuen</p> <p>(852) 2388-7171 / (852) 2710-8012</p> <p>acme@acmesanitary.com.hk</p> <p>www.acmesanitary.com.hk</p> | <p>Illustration/ Drawing</p>     |
|--|--|---|

Note: The color of the above fittings may be varied without further notice.

\* All information of the above is for the reference only. No prior notice is made if any changes.



水務署  
Water Supplies Department



Headquarters  
48/F, Inland Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號: BE/L20317/20 T/J(399/2020)  
Our ref.  
來函檔號  
Your ref.

電話  
Tel.  
傳真  
Fax. : 2824 0578

15 June 2020

**Approval of "WDI" Flush Valve  
(General Acceptance No. C20200454F)**

Your letters ref. BE/L20317/20 and BE/L20354/20 dated 15 April 2020 and 19 May 2020 respectively refer.

Having considered the test report ref. RACA058 issued on 9 April 2020 by Ideal Test Consultants Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** WDI (Xiamen) Technology Inc  
**Country of Origin:** the Mainland of China  
**Brand:** WDI  
**Details of Fitting:** 2" Plastic dual flush valve  
**Model:** B4900H  
**Body Markings:** WDI B4900  
**Expiry Date:** 2 April 2025





**Proviso:** As the fitting has not been tested for use in contact with water intended for human consumption, the fitting can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fitting in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The flushing volume of the flushing valve should be adjusted to suit the design of the toilet bowl so that wastes can be cleared effectively by a single flush."

"The fitting should be used within the range of working pressures specified by the manufacturer." AND

"The installed fitting should not result in backflow of water that will contaminate the flushing water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in flushing water plumbing systems.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c.      WSD 3321/1/82   ] - without catalogue  
            ME/MC           ] - with soft copy only