



**Acme Sanitary Ware Co. Ltd.**

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012


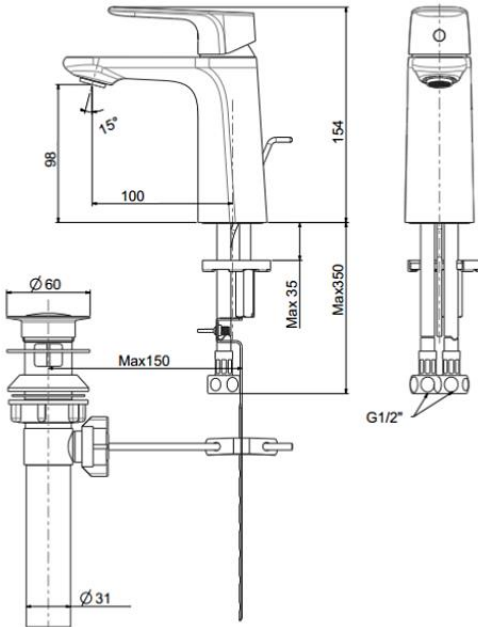
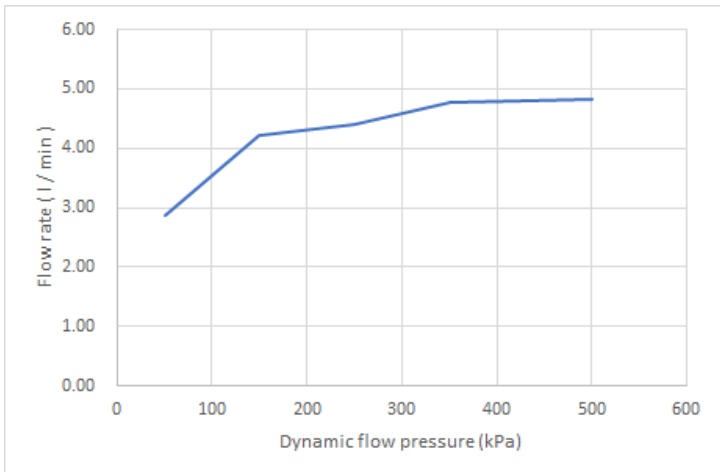

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

*American Standard*

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

## SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) "Signature" Low lead brass single lever basin mixer with pop-up drain in chrome finish; bulit-in aerator FF1-CN521A0002299P; nominated flow rate <b>4.5 L/min</b> in WELS <b>Grade 1</b> ; Registration No. TM 20-0103	<div>Illustration/ Drawing</div> <div></div>												
Dimensions	Refer to drawing													
Model	FFAS1701-1015L0BC0													
Material/Finish	Low Lead Brass / Chrome Finish													
Manufacturer	American Standard (PRC)													
Source	Acme Sanitary Ware Co. Ltd													
Contact Tel/Fax	Mr. Eric Wong/ Mr. Don Yuen	<div></div>												
E-mail	acme@acmesanitary.com.hk													
Website	www.acmesanitary.com.hk													
<div><div><b>FEATURES</b><ul style="list-style-type: none"><li>• Low lead brass, strong and durable</li><li>• Grohe High quality ceramic valve for longer usage</li><li>• Ceramic cartridge tested = 500,000 times</li><li>• Neoperl aerator PCA 1.5 GPM</li><li>• With pop-up drain</li><li>• With normal packaging</li><li>• Flow rate @ 0.1MPa: 4L/min</li></ul></div><div><b>SPECIFICATIONS</b><ul style="list-style-type: none"><li>• Basin mixer faucet</li><li>• 1-hole installation: lever handle (cold&amp; hot)</li><li>• Spout reach: 100.8mm</li><li>• Spout height: 98.5mm</li></ul></div><div><b>FINISHES AVAILABILITY</b><ul style="list-style-type: none"><li>• Chrome (-CP)</li></ul></div></div> <div></div> <table><tr><td>Dynamic flow pressure (kPa)</td><td>50</td><td>150</td><td>250</td><td>350</td><td>500</td></tr><tr><td>Flow rate (l / min )</td><td>2.88</td><td>4.23</td><td>4.40</td><td>4.78</td><td>4.83</td></tr></table>			Dynamic flow pressure (kPa)	50	150	250	350	500	Flow rate (l / min )	2.88	4.23	4.40	4.78	4.83
Dynamic flow pressure (kPa)	50		150	250	350	500								
Flow rate (l / min )	2.88		4.23	4.40	4.78	4.83								
			<div></div>											

Note: Equivalent to CF-1701.101.50

\* All information of the above is for the reference only. No prior notice is made if any changes.

註冊號碼 (Registration No.):

TM 20-0103




自願參與用水效益標籤計劃 - 水龍頭  
Voluntary Water Efficiency Labelling Scheme - Water Taps



茲證明  
This is to certify that

將下列水龍頭在本計劃內註冊：  
has registered the following water tap under this scheme :

牌 子 / Brand	:	American Standard
型 號 / Model	:	FFAS1701-1015LOBX0 + FF1-CN521A0002299P
種 類 / Type	:	Mixing
原產地 / Country or Region Origin	:	China (Mixer) Germany (Flow Controller)

在用水效益標籤上展示的標誌 <i>Symbolic Presentation on the Water Efficiency Label</i>	:		滴水點 <i>Water droplet(s)</i>
用水效益級別 <i>Water Efficiency Grade</i>	:	1	
耗水量 <i>Water Consumption</i>	:	4.5	公升/分鐘 <i>litres/minute</i>

簽發日期：  
Date of Issue: 18 June 2020



水務署  
Water Supplies Department



水務署署長(張業駒代行)  
for Director of Water Supplies



Supplies Department

Quarters

告士打道七號入境事務大樓 48 樓

48/F, Immigration Tower, 7 Gloucester Road, Wan Chai, Hong Kong

本署檔號 : ( 4 ) in WSD 3321/19 T/J(987/2019)  
Our ref.  
來函檔號 :  
Your ref.

電話 :  
Tel.  
傳真 : 2824 0578  
Fax.

13 November 2019

**Approval of "AMERICAN STANDARD" Basin Mixer  
(General Acceptance No. C20190554)**

Your letters ref. WRC/2110 and C-WSD/0537 dated 23 September 2019 and 31 October 2019 respectively refer.

Having considered the test report ref. J24046A issued on 12 September 2019 by Nutek Systems (HK) Ltd., this Authority accepts that the fitting described below complies with, and its use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

**Name of Manufacturer:** American Standard  
**Country of Origin:** the Mainland of China  
**Brand:** American Standard  
**Details of Fitting:** 1/2" Single lever basin mixer  
**Model:** FFAS1701-1015L0BX0  
(where the digit "X" denotes the code of region)  
**Body Markings:** *American Standard*  
**Expiry Date:** 26 February 2024



This Authority hereby permits the use of the above fitting in fresh water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"The cold water supply to the fitting shall be drawn from the same source that supplies the hot water apparatus so as to provide a balanced pressure and to obviate the risk of scalding in the event of a restriction or failure in the water supply."

A condition of this acceptance is that the fitting to be installed shall be replicas of the sample as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fitting installed fails to meet that of the approved sample or if the fitting is found to be unsuitable for use in fresh water plumbing systems.

This acceptance is only applicable to the main body of the fitting, unless otherwise specified.

For the use of the fitting in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fitting by this Authority.

Should you have any enquiries, please contact our Engineer Mr. Terry KUNG at tel. no. 3583 4086.

Yours faithfully,



(CHAN Chung-kun)

for Director of Water Supplies

Encl.

c.c.      WSD 3321/1/82    ] - without catalogue  
            ME/MC            ] - with soft copy only