

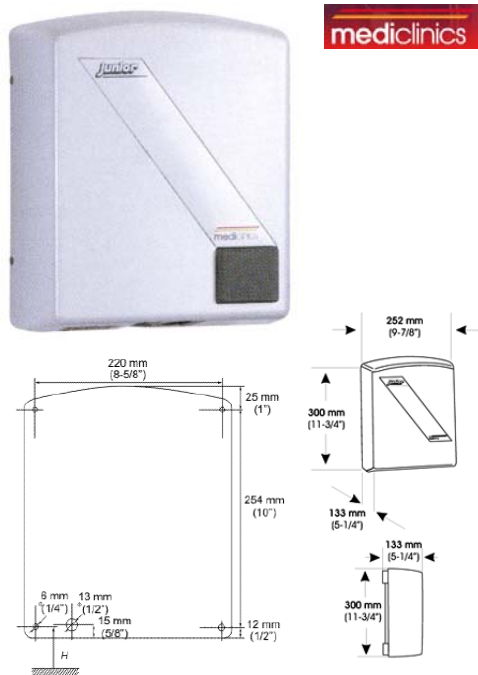


Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Hand dryer Junior push-button operated, white ABS	<div>Illustration/ Drawing</div> <div></div>																																
Dimensions	L252 x W133 x H300 mm																																	
Model	M88																																	
Material/ Color	ABS/ White																																	
Manufacturer	Mediclinics, S.A. (Spain)																																	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung																																	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																																	
E-mail	acme@acmesanitary.com.hk																																	
Website	www.acmesanitary.com.hk																																	
<div>Components and Materials</div> <ul style="list-style-type: none">• White ABS thermoplastic one-piece cover, 3 mm thick. Cover fixed to the base by means of 4 Phillips head screws.• Thermoplastic PP+ talcum base, with 4 Ø 8 mm holes for wall mounting.• Induction motor, 2.800 rpm, maintenance-free and high durability, incorporates a self-resetable thermal cut-off at 130 °C.• PP UL94-VO with single inlet fan wheel.• Waved wire NiCr heating element that incorporates a self-resetable thermal cut-off at 80 °C.• Two distances (15/25 cm) IR electronic detection sensor.• Stainless steel air outlet grill. <div>Operation</div> <p>Place the hands under the air outlet grill. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow.</p>		<table><tr><td>Voltage</td><td>220-240 V</td></tr><tr><td>Frequency</td><td>50/60 Hz</td></tr><tr><td>Electrical isolation</td><td>Class II</td></tr><tr><td>Dimensions</td><td>300x 252x 133 mm</td></tr><tr><td>Weight</td><td>3 Kg</td></tr><tr><td>Effective airflow</td><td>160 m³/h / 2.670 l/min</td></tr><tr><td>Nominal airflow</td><td>200 m³/h 3300 l/min</td></tr><tr><td>Air velocity</td><td>60 Km/h</td></tr><tr><td>Total power</td><td>1.650 W</td></tr><tr><td>Motor power</td><td>140 W</td></tr><tr><td>Heating element power</td><td>1.510 W</td></tr><tr><td>Consumption</td><td>7 A</td></tr><tr><td>RPM</td><td>2.800</td></tr><tr><td>Air temperature(10 cm distance / 21 °C)</td><td>51 °C</td></tr><tr><td>Noise level (at 2 m)</td><td>60 dB</td></tr><tr><td>Protection level</td><td>IP23</td></tr></table>	Voltage	220-240 V	Frequency	50/60 Hz	Electrical isolation	Class II	Dimensions	300x 252x 133 mm	Weight	3 Kg	Effective airflow	160 m³/h / 2.670 l/min	Nominal airflow	200 m³/h 3300 l/min	Air velocity	60 Km/h	Total power	1.650 W	Motor power	140 W	Heating element power	1.510 W	Consumption	7 A	RPM	2.800	Air temperature(10 cm distance / 21 °C)	51 °C	Noise level (at 2 m)	60 dB	Protection level	IP23
Voltage	220-240 V																																	
Frequency	50/60 Hz																																	
Electrical isolation	Class II																																	
Dimensions	300x 252x 133 mm																																	
Weight	3 Kg																																	
Effective airflow	160 m³/h / 2.670 l/min																																	
Nominal airflow	200 m³/h 3300 l/min																																	
Air velocity	60 Km/h																																	
Total power	1.650 W																																	
Motor power	140 W																																	
Heating element power	1.510 W																																	
Consumption	7 A																																	
RPM	2.800																																	
Air temperature(10 cm distance / 21 °C)	51 °C																																	
Noise level (at 2 m)	60 dB																																	
Protection level	IP23																																	

Note: