


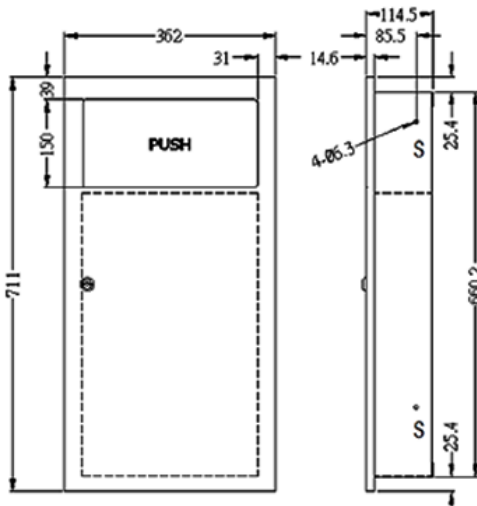


Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
Tel: 2388 7171 Fax: 2710 8012
E-mail: acme@acmesanitary.com.hk
Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Mediclinics (Spain) Waste receptacles and bins, stainless steel AISI 304, satin finish	<div>Illustration/ Drawing</div> <div></div>
Dimensions	L362 x W114.5 x H711 mm	
Model	PPE0010CS	
Material/ Finish	Stainless Steel AISI 304 / Satin Finish	
Manufacturer	Mediclinics, S.A. (Spain)	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
General Description <ul style="list-style-type: none">Recessed waste receptacle, 14.2L of capacity made of stainless steel AISI 304, with self-closing lid and an inner removable plastic bin.Inner removable leak proof plastic bin.Suitable for lavatories and in-doors public areas with medium traffic .Model suitable for public use.		<div></div>
Components & Materials: <ul style="list-style-type: none">PPE0010CS: stainless steel AISI 304, satin finish.CABINET: made of stainless steel,0.8 mm thick with no fastening devices or welded seams with a 31mm wide perimeter trim to lay flat against wall.DOOR: made of stainless steel,0.8 mm thick made from a single piece with no sharp edgesand no visible seams on door face. Door shall be attached to cabinet side with a stainless steel piano hinge and shall be held closed with a lock-keyed.PUSH DOOR: made of stainless steel,0.8 mm thick shall be hung on cabinet door with two self closing springs and shall have the PUSH symbol on face.INNER BIN: made of thermo-plastic material, 14.2 L of capacity it is leak proof.Structural assembly of all components shall be of spot welded construction.		
MOUNTING <ul style="list-style-type: none">Rough wall opening required is 324mm (W)x 667mm(H)x 106mm (D). Secure with stainless steel screws at points indicated by an S (see upper figure).		
OPERATION <ul style="list-style-type: none">Waste is inserted through self-closing push door. Waste container is emptied manually on cycle determined by maintenance needs. Locked compartment prevents unauthorized access.		

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics, S.A.