



Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong






Tel: 2388 7171 Fax: 2710 8012

E-mail: acme@acmesanitary.com.hk

Website: www.acmesanitaryware.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

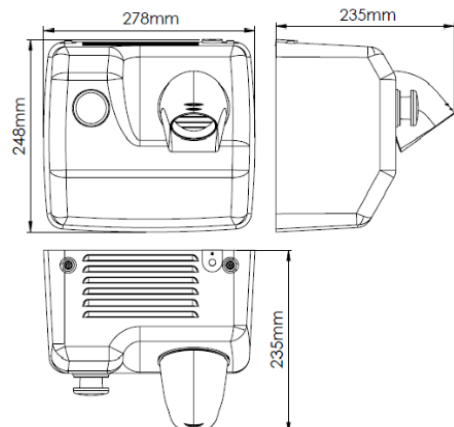SANITARY WARE SPECIFICATION SHEET


Item Descriptions	Mediclinics (Spain) steel push-button hair dryer in satin chrome finish	Illustration/ Drawing 																														
Dimensions	L278 x W235 x H248 mm																															
Model	SC0088HCS																															
Material/ Finish	Steel / Satin Chrome Finish																															
Manufacturer	Mediclinics, S.A. (Spain)																															
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																															
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																															
E-mail	acme@acmesanitary.com.hk																															
Website	www.acmesanitary.com.hk																															
General description <ul style="list-style-type: none">Saniflow® hair dryer is the rotating nozzle hair dryer that is most widely used in the world, regardless of the location to be fitted.These machines also feature easy maintenance, low noise levels and a high level of user safety. Together with an accurate design of components, SANIFLOW dryers boast the most powerful airflow in the world, which, combined with a comfortable drying temperature, reduces drying times to a minimum.With a 1.5 mm. thick steel cover,these hair dryers are available in 2 different finishes (white enameled coating and satin). These hair dryers are ideal for Heavy traffic Bathrooms.Thus, these are proven models with a long durability and complete reliability, with anti-vandalism features and designed to be installed in high traffic of people such assport centers, swimming pools, SPA and wellness centers and large recreational areas, among others.																																
Components & materials: <ul style="list-style-type: none">SC0088H: 1.5 mm. thick steel cover, white enamelled coating finish.SC0088HCS: 1.5 mm. thick steel cover,satin finish.One-piece steel cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Saniflow ® wrench.		 <p>SC0088H White enamelled coating</p>  <p>SC0088HCS Satin chrome</p>																														
		Technical Specifications <table><tr><td>Voltage</td><td>220- 240 V</td></tr><tr><td>Frequency</td><td>50/60 Hz</td></tr><tr><td>Electrical Isolation</td><td>Class I</td></tr><tr><td>Total power</td><td>2,250 W</td></tr><tr><td>Consumption</td><td>10 A</td></tr><tr><td>Motor power</td><td>250 W</td></tr><tr><td>Rpm</td><td>5,500</td></tr><tr><td>Heating element power</td><td>2,000 W</td></tr><tr><td>Dimensions</td><td>248x278x235 mm</td></tr><tr><td>Weight</td><td>5.9 Kg</td></tr><tr><td>Cover thickness</td><td>1.5 mm</td></tr><tr><td>Effective airflow</td><td>250 m³/h (4,250 L/min)</td></tr><tr><td>Air velocity</td><td>100 Km/h</td></tr><tr><td>Air temperature (10 cm distance/21°C)</td><td>53 °C</td></tr><tr><td>Sound pressure ^(*) (at 2m)</td><td>70 dBA</td></tr></table> <p>(*) According to UNE EN ISO 11201:2010 V2 standard.</p>	Voltage	220- 240 V	Frequency	50/60 Hz	Electrical Isolation	Class I	Total power	2,250 W	Consumption	10 A	Motor power	250 W	Rpm	5,500	Heating element power	2,000 W	Dimensions	248x278x235 mm	Weight	5.9 Kg	Cover thickness	1.5 mm	Effective airflow	250 m ³ /h (4,250 L/min)	Air velocity	100 Km/h	Air temperature (10 cm distance/21°C)	53 °C	Sound pressure ^(*) (at 2m)	70 dBA
Voltage	220- 240 V																															
Frequency	50/60 Hz																															
Electrical Isolation	Class I																															
Total power	2,250 W																															
Consumption	10 A																															
Motor power	250 W																															
Rpm	5,500																															
Heating element power	2,000 W																															
Dimensions	248x278x235 mm																															
Weight	5.9 Kg																															
Cover thickness	1.5 mm																															
Effective airflow	250 m ³ /h (4,250 L/min)																															
Air velocity	100 Km/h																															
Air temperature (10 cm distance/21°C)	53 °C																															
Sound pressure ^(*) (at 2m)	70 dBA																															

Note:



* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Mediclinics.



SANITARY WARE SPECIFICATION SHEET