

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong Tel: 2388 7171 Fax: 2710 8012 Email: acme@acmesanitary.com.hk Since 1949 Website: www.acmesanitary.com.hk

American Standard

PROJECT	REF	REV	ITEM CODE	
LOCATION	DATE		PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	American Standard (PRC) Concealed urinal			
	sensor for sea water; battery operated;			
	ADM MODE; 24 hrs flushing system;			
	Water flush volume 1.5 litres/cycle in			
	WELS Grade 1; Registration No. 1U 19-			
	0004			
Dimensions	L135 x W135 x H104 mm			
Model	WF-8004.0S0.50			
Finish	Chrome Plated			
Finish	Chrome Plated			
Manufacturer	American Standard (PRC)			
Source	Acme Sanitary Ware Co. Ltd			
	Mr. Eric Wong/ Mr. Don Yuen			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012			
E-mail	acme@acmesanitary.com.hk			
Website	www.acmesanitary.com.hk			

Specification:-

Battery supply: 6V Lithium Battery

Mode of the inducing: a. Infrared Induction b. ADM Mode"

Detects Range (Default): 40CM Detects Time: 3 Seconds


Flush Time: Pre-Flush1.5 seconds/ Second Flush 8 Seconds

Flush Volume: 4L or Less

Pressure Requirement: 0.1Mpa ~ 0.75Mpa


Pipe Size: G 1/2"

Environment Temperature: 1°C ~ 40°C Acceptable Water temperature: 1°C ~ 40°C Wall Opening: 116 x 116 x 104mm







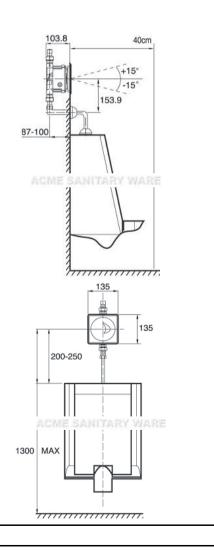



^{*} All information of the above is for the reference only. No prior notice is made if any changes.



自願參與用水效益標籤計劃-小便器用具 Voluntary Water Efficiency Labelling Scheme - Urinal Equipment





This is to certify that

將下列小便器用具在本計劃內註冊: has registered the following urinal equipment under this scheme:

牌 子 / Brand

American Standard

/ Model

WF-8004.0S0.50

/ Category

/ Country or Region Origin 原產地

China

在用水效益標籤上展示的標誌

Symbolic Presentation on the Water Efficiency Label

滴水點 Water droplet(s)

用水效益级别 Water Efficiency Frade

Water Flush Volume

1.5

公升/循環 litres/oyde

簽發日期: Date of Issue:

22 March 2019



Water Supplies Department

水務署署長(張業駒代行)

for Director of Water Supplies The above urinal equipment is operated with a smart demand operation to achieve additional



本署檔號 Our ref. 來函檔號

Your ref.

(4) in WSD 3321/2021 T/J(1735/2021)

電話

Tel.

傳真 Fax.

: 2824 0578

18 March 2022



Dear Sir,

Approval of "AMERICAN STANDARD" Sensor Flush Valves (General Acceptance No. C20220209F)

Your letters ref. WRC/2691 and C-WSD/0902 dated 30 November 2021 and 14 February 2022 respectively refer.

Having considered the test report ref. J24959Ar2 issued on 14 January 2022 by Nutek Systems (HK) Limited, this Authority accepts that the fittings described below comply with, and their use when correctly installed does not contravene, the Waterworks Ordinance and Regulations.

Name of Manufacturer:

American Standard

Country of Origin:

the Mainland of China

Brand:

American Standard

Details of Fitting:

1/2" Sensor flush valve for urinal

Model:

WF-8004.0S0.50 WF-8014.0S0.50

Body Markings:

American Standard

Expiry Date:

4 November 2026





Proviso:

As the fittings have not been tested for use in contact with water intended for human consumption, the fittings can only be used in flushing water plumbing system.

This Authority hereby permits the use of the above fittings in flushing water plumbing systems subject to full adherence to Waterworks installation requirements. In particular, you are required to draw your customers' attention to the following requirement-

"Installation of filter before flushing valve is required. Without the filter, the flushing valve is liable to leak. The installed filter need frequent inspection and cleaning to maintain flushing supply. Normally only public toilets with good management system for maintenance would be considered."

"A stop cock or gate valve must be installed at the upstream of the fittings for manual isolation of water supply."

"The design flushing volume of the flushing valves should be compatible with the toilet bowl to ensure that effective clearance can be achieved by a single flush of water."

"Flushing valve should be used within the range of working pressures specified by the manufacturer." AND

"Installation of electronic opening and closing sanitary tapware should also comply with the requirements of Electrical & Mechanical Services Department."

A condition of this acceptance is that the fittings to be installed shall be replicas of the samples as certified by the testing agent mentioned above and without modifications. This acceptance may be withdrawn at any time if the standard of the fittings installed fails to meet that of the approved samples or if the fittings are found to be unsuitable for use in flushing water plumbing systems.

For the use of the fittings in any project, the General Acceptance Number of this letter must be quoted as a means of identification of acceptance of the fittings by this Authority.

Should you have any enquiries, please contact our Engineer Ms Winnie LO at tel. no. 3583 4086.

Yours faithfully,

for Director of Water Supplies

Encl.

c.c. WSD 3321/1/82] - without catalogue ME/MC] - with soft copy only