














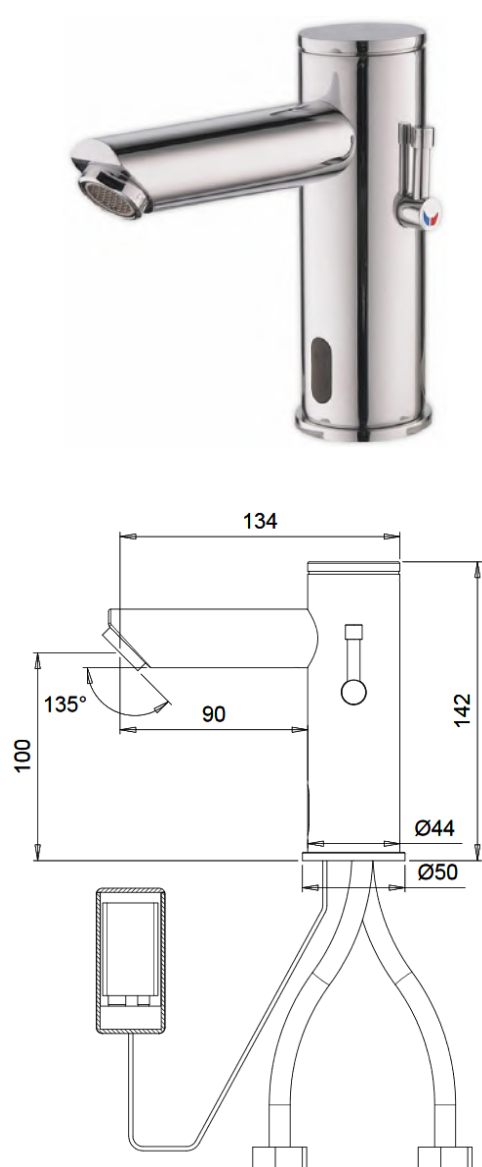







Acme Sanitary Ware Co Ltd

Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong
 Tel: 2388 7171 Fax: 2710 8012
 E-mail: acme@acmesanitary.com.hk
 Website: www.acmesanitaryware.com.hk



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	


SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Stern (Israel) "Smart 1000 L" Chrome plated deck mounted long spout sensor mixer with adjustable temperature limiter in 9V DC Supply with IP67 waterproof battery box			<div>Illustration/ Drawing</div> 																
Dimensions	L90 x W44 x H142 mm																			
Model	Smart 1000 LB																			
Code Number	235510																			
Finish	Chrome Plated																			
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen																			
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																			
E-mail	acme@acmesanitary.com.hk																			
Website	www.acmesanitary.com.hk																			
SMART 1000 LB Ref # 235510 Touch-free electronic faucet for deck mounted installations. Activated by infrared sensor. Long spout version. For hot and cold water. Includes a mixer for water temperature adjustment. Filters included. Chrome plated body, other finishes available. Latching solenoid valve is located above deck inside the product for added vandal protection. Regular faucet installation with simple battery connection. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. 24 hour mandatory hygiene flush available upon request.																				
Application: Deck-mounted faucets. Combining an elegant minimalist design with anti-vandal features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Prevents cross contamination. Ideal for stadiums, train and bus stations and highway rest stops.																				
Use: Touch-free electronic faucet. The faucet is automatically activated when the users place their hands in the sensor range and stops when the users remove their hands.																				
<table><tr><th>PART NUMBER</th><th>DESCRIPTION</th><th>POWER SUPPLY</th><th>TO BE SPECIFIED</th></tr><tr><td>235510</td><td>SMART 1000 LB</td><td>Battery operated</td><td><input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"</td></tr><tr><td>235610</td><td>SMART 1000 LE</td><td>Transformer Operated</td><td><input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"</td></tr></table>					PART NUMBER	DESCRIPTION	POWER SUPPLY	TO BE SPECIFIED	235510	SMART 1000 LB	Battery operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"	235610	SMART 1000 LE	Transformer Operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"				
PART NUMBER	DESCRIPTION	POWER SUPPLY	TO BE SPECIFIED																	
235510	SMART 1000 LB	Battery operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"																	
235610	SMART 1000 LE	Transformer Operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"																	
<table><tr><th colspan="2">OPTIONS</th><th>Power Supply Options</th><th>Water flow</th></tr><tr><td>Remote control for adjusting settings</td><td>07100005</td><td rowspan="3">External Battery Box with 9 V Alkaline Battery. IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries, 9 V Transformer, IP 69 Encapsulated 9 V Transformer.</td><td>0.5 GPM \ 1.89LPM</td></tr><tr><td>Matching soap dispenser battery operated</td><td>235920</td><td>Recommended Pressure</td><td>0.5-8.0 bar / 7-116 PSI</td></tr><tr><td>Matching soap dispenser transformer operated</td><td>235900</td><td>Water flow</td><td>Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM</td></tr></table>					OPTIONS		Power Supply Options	Water flow	Remote control for adjusting settings	07100005	External Battery Box with 9 V Alkaline Battery. IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries, 9 V Transformer, IP 69 Encapsulated 9 V Transformer.	0.5 GPM \ 1.89LPM	Matching soap dispenser battery operated	235920	Recommended Pressure	0.5-8.0 bar / 7-116 PSI	Matching soap dispenser transformer operated	235900	Water flow	Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM
OPTIONS		Power Supply Options	Water flow																	
Remote control for adjusting settings	07100005	External Battery Box with 9 V Alkaline Battery. IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries, 9 V Transformer, IP 69 Encapsulated 9 V Transformer.	0.5 GPM \ 1.89LPM																	
Matching soap dispenser battery operated	235920		Recommended Pressure	0.5-8.0 bar / 7-116 PSI																
Matching soap dispenser transformer operated	235900		Water flow	Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM																
<table><tr><td>Security Time</td><td>90 seconds. Adjustable by remote control</td></tr><tr><td>Water Temperature</td><td>Max. 70 °C</td></tr></table>					Security Time	90 seconds. Adjustable by remote control	Water Temperature	Max. 70 °C												
Security Time	90 seconds. Adjustable by remote control																			
Water Temperature	Max. 70 °C																			
<table><tr><td></td><td>Installation: Lavatory mounted</td></tr><tr><td></td><td>Water supply: Hot & Cold (2 inlets)</td></tr><tr><td></td><td>Water temperature: Max 70 °C</td></tr><tr><td></td><td>Operating pressure: 0.5 - 8.0 bar</td></tr><tr><td></td><td>Power source: 9V Alkaline battery</td></tr><tr><td></td><td>Stern Soap & Water: Smart matching soap dispenser</td></tr></table>						Installation: Lavatory mounted		Water supply: Hot & Cold (2 inlets)		Water temperature: Max 70 °C		Operating pressure: 0.5 - 8.0 bar		Power source: 9V Alkaline battery		Stern Soap & Water: Smart matching soap dispenser				
	Installation: Lavatory mounted																			
	Water supply: Hot & Cold (2 inlets)																			
	Water temperature: Max 70 °C																			
	Operating pressure: 0.5 - 8.0 bar																			
	Power source: 9V Alkaline battery																			
	Stern Soap & Water: Smart matching soap dispenser																			

* All information of the above is for the reference only. No prior notice is made if any changes.



SPARE PARTS LIST

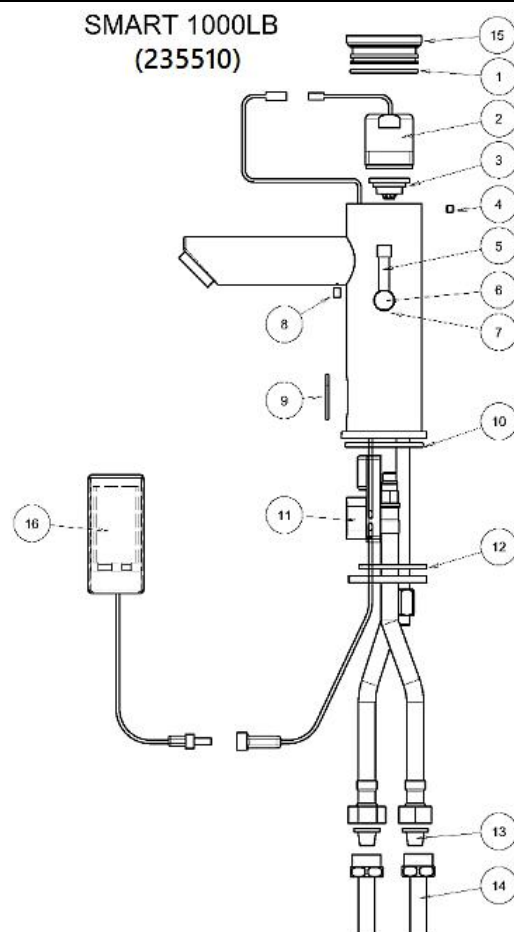

Quantity	Part Number	Description	Cat. No.
	-	Seals and Screws Kit	07210007
1	1	O-ring	
1	10	O-ring	
1	9	O-ring	
1	12	Gasket	
1	4	Screw	
1	8	Screw	
	-	Sensor Kit	07220184
1	11	Infra Red Sensor	
1	9	O-ring	
	-	Filter Adapter Kit	07212001
1	13	Filter	
1	14	Nipple	
	-	Cover Kit	07270003
1	15	Cover	
1	1	O-ring	
	-	Solenoid Valve Kit	07230003
1	2	Solenoid valve	
1	3	Diaphragm	
	3	Diaphragm	04500001
	-	Mixer Handle kit	07260002
1	5	Handle	
1	6	Axis	
1	7	O-ring	
	16	Battery box	06530018
	16	IP 67 Battery box	06530019

Note: In order to locate the relevant spare part, please check the corresponding parts and part number in the drawing. Minimum order quantity will be required.

** All information of the above is for the reference only. No prior notice is made if any changes.*




INSTALLATION

STEP 1 – PREPARATION FOR MOUNTING THE FAUCET


1

Shut off the water supply.

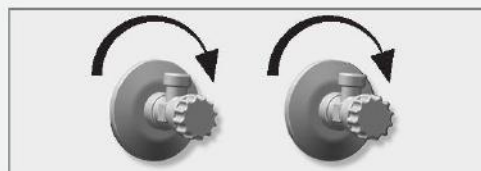

2


Remove the hexagonal nut, the disk and the gasket. Do not remove the O-ring from the base of the faucet.

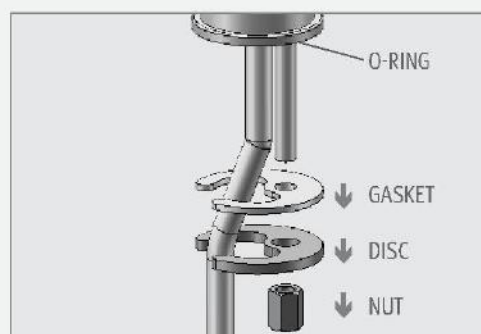

STEP 2 – INSTALLING THE FAUCET


1

Place the faucet with O-ring into the hole in deck or lavatory. Make sure the O-ring is located between the deck or lavatory and the bottom of the faucet.

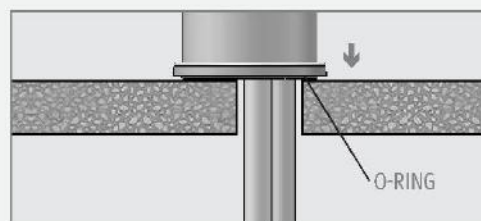

2

Slide the gasket, disk and hexagonal nut over the flexible hose and secure the faucet into place.

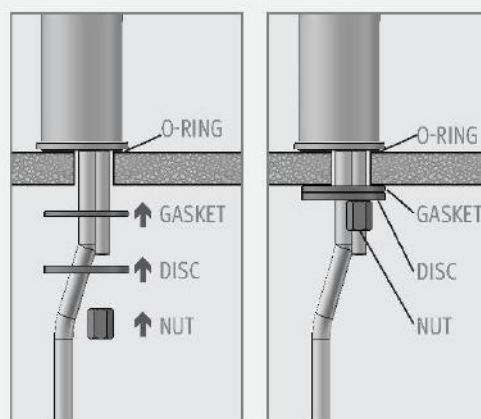



INSTALLATION

STEP 3 – CONNECTING THE WATER SUPPLY

1

Connect the flexible pipe to the water supply.


For models with temperature control connect the red flexible pipe to the hot water supply and the blue flexible pipe to the cold water supply.



MAKE SURE THAT THE FILTER(S) IS/ARE INSTALLED BETWEEN THE FLEXIBLE PIPE AND THE SHUT OFF VALVE (ANGLE VALVE) (NOT SUPPLIED).

2

Turn on the central water supply and the shut-off valves (angle valves) and check for leaks.

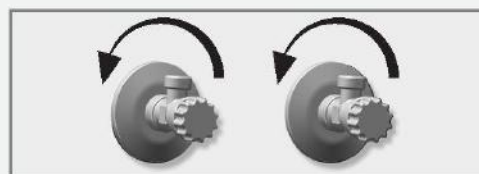



INSTALLATION

STEP 4 – CONNECTING THE POWER SOURCE

BATTERY VERSION

Install the battery box at the wall underneath the sink using the two sided adhesive foam tape. The cable connection must point down. (You can use an optional extension cable in order to assemble the battery box up to 10ft. away from the sink.)



1

TRANSFORMER VERSION

Plug the transformer into the electricity socket and connect the connectors.



2

In order to avoid entering into the adjusting mode, wait 10 seconds before operating the faucet. If the range is unsatisfactory, refer to the section titled “settings adjustment.”



ABOUT
10
SECONDS

NOTE: This model includes a special aerator that allows you to adjust the water stream direction on site in order to prevent water splashing if needed. To change the angle of the water stream, simply move the adjustable tilting plate by pressing it smoothly.

ATTENTION! the aerator is tightened to prevent removal by hand.





TROUBLESHOOTING

PROBLEM	INDICATOR	CAUSE	SOLUTION
No water coming out of the faucet:	1. Sensor flashes continuously when user's hands are within the sensor's range.	Low battery.	Replace battery
	2. LED in the sensor does not flash once when user's hands are within the sensor's range.	1. Range is too short.	Increase the range
		2. Range is too long.	Decrease the range
		3. Battery is completely used up	The battery must be replaced.
		4. Unit is in "Security Mode"	
		5. Sensor is picking up reflections from the washbasin or another object.	Eliminate cause of reflection.
	3. LED in the sensor flashes once when user's hands are within the sensor's range.	1. Connectors between the electronic unit and solenoid are disconnected.	Connect the electronic unit connectors to the solenoid.
		2. Debris or scale in solenoid.	Unscrew solenoid, pull out the plunger and the spring from the solenoid and clean them. Use scale remover material if needed. When replacing the plunger, please make sure that the spring is in vertical position.
		3. The central orifice in the diaphragm is plugged or the diaphragm is torn	Clean the orifice or replace diaphragm.
		4. The water supply pressure is higher than 8 bar.	Reduce the supply water pressure.
		5. The water supply pressure is under 8 bars and yet the pressure in the faucet's body is higher. This situation could be caused by a sudden increase in the water supply pressure that the back check prevents from dropping, even after water supply pressure drops under 8 bars.	Shut off water supply and unscrew one of the flexible pipes in order to reduce the pressure that blocks the product.
Water flow from spout does not stop:	1. Sensor flashes once when user's hands are within the sensor's range.	Debris or scale in diaphragm	Clean the orifice or replace diaphragm.
	2. LED in the sensor does not flash once when user's hands are within the sensor's range.	1. Sensor is dirty or covered.**	Clean or eliminate cause of interference.
		2. Sensor is picking up reflections from the washbasin or another object.	Decrease the range or eliminate cause of reflection.
Water flow diminished		Filter or aerator is clogged	Remove, clean, re-install

* "Security Mode": If the sensor is covered for more than 90 sec. the faucet will automatically shut off water flow. To return to normal operation remove any blockage.

** In this case, the water flow will stop anyway after 90 seconds because of the security time.