



PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET


<p>Item Descriptions</p>	<p>Stern (Israel) "Smart 1000 Plus" Chrome plated deck mounted extended body sensor mixer with adjustable temperature limiter in AC Supply with 5m wire AC 110-240 Vac 50/60Hz to 9V 0.3A IP68 waterproof switching transformers</p>	<p style="text-align: center;">Illustration/ Drawing</p>																			
Dimensions	L60 x W44 x H338 mm																				
Model	Smart 1000 Plus E																				
Code Number	235650																				
Finish	Chrome Plated																				
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Wilson Hung																				
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012																				
E-mail	acme@acmesanitary.com.hk																				
Website	www.acmesanitary.com.hk																				
<p>SMART 1000 PLUS E Ref # 235650</p> <p>Touch-free electronic faucet for deck mounted installations. Activated by infrared sensor. Tall version for counter top washbasins. For hot and cold water. Includes a mixer for water temperature adjustment. Filters included. Chrome plated body, other finishes available. Latching solenoid valve is located above deck inside the product for added vandal protection. Regular faucet installation with simple transformer connection. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. 24 hour mandatory hygiene flush available upon request.</p> <p>Application: Deck-mounted faucets. Combining an elegant minimalist design with anti-vandal features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Prevents cross contamination. Ideal for stadiums, train and bus stations and highway rest stops.</p> <p>Use: Touch-free electronic faucet. The faucet is automatically activated when the users place their hands in the sensor range and stops when the users remove their hands.</p>																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">PART NUMBER</th> <th style="width: 25%;">DESCRIPTION</th> <th style="width: 20%;">POWER SUPPLY</th> <th style="width: 40%;">TO BE SPECIFIED</th> </tr> </thead> <tbody> <tr> <td>235550</td> <td>Smart 1000 Plus B</td> <td>Battery operated</td> <td> <input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30" </td> </tr> <tr> <td>235650</td> <td>Smart 1000 Plus E</td> <td>Transformer Operated</td> <td> <input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30" </td> </tr> </tbody> </table>		PART NUMBER	DESCRIPTION	POWER SUPPLY	TO BE SPECIFIED	235550	Smart 1000 Plus B	Battery operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"	235650	Smart 1000 Plus E	Transformer Operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"								
PART NUMBER	DESCRIPTION	POWER SUPPLY	TO BE SPECIFIED																		
235550	Smart 1000 Plus B	Battery operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"																		
235650	Smart 1000 Plus E	Transformer Operated	<input type="checkbox"/> Spout length 90mm \ 3.54" <input type="checkbox"/> Tall body 338mm \ 13.30"																		
<p style="text-align: center;">OPTIONS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Remote control for adjusting settings</th> <th style="width: 20%;">07100005</th> <th style="width: 20%;">Power Supply Options</th> <th style="width: 40%;">External Battery Box with 9V Alkaline Battery.</th> </tr> </thead> <tbody> <tr> <td>Matching soap dispenser battery operated</td> <td>235920</td> <td>Recommended Pressure</td> <td>IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries. 9 V Transformer. IP 68 Encapsulated 9V Transformer.</td> </tr> <tr> <td>Matching soap dispenser transformer operated</td> <td>235900</td> <td>Water flow</td> <td>0.5-8.0 bar / 7-116 PSI 0.5 GPM \ 1.89LPM Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM</td> </tr> <tr> <td></td> <td></td> <td>Security Time</td> <td>90 seconds. Adjustable by remote control</td> </tr> <tr> <td></td> <td></td> <td>Water Temperature</td> <td>Max. 70 °C</td> </tr> </tbody> </table>		Remote control for adjusting settings	07100005	Power Supply Options	External Battery Box with 9V Alkaline Battery.	Matching soap dispenser battery operated	235920	Recommended Pressure	IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries. 9 V Transformer. IP 68 Encapsulated 9V Transformer.	Matching soap dispenser transformer operated	235900	Water flow	0.5-8.0 bar / 7-116 PSI 0.5 GPM \ 1.89LPM Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM			Security Time	90 seconds. Adjustable by remote control			Water Temperature	Max. 70 °C
Remote control for adjusting settings	07100005	Power Supply Options	External Battery Box with 9V Alkaline Battery.																		
Matching soap dispenser battery operated	235920	Recommended Pressure	IP67 Battery Box including 6 AA, 1.5 V Alkaline batteries. 9 V Transformer. IP 68 Encapsulated 9V Transformer.																		
Matching soap dispenser transformer operated	235900	Water flow	0.5-8.0 bar / 7-116 PSI 0.5 GPM \ 1.89LPM Other options: - 1 GPM \ 3.78LPM - 1.58 GPM \ 6LPM - 2.1 GPM \ 8LPM																		
		Security Time	90 seconds. Adjustable by remote control																		
		Water Temperature	Max. 70 °C																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; text-align: center;"></td> <td>Installation: Lavatory mounted</td> </tr> <tr> <td style="text-align: center;"></td> <td>Water supply: Hot & Cold (2 inlets)</td> </tr> <tr> <td style="text-align: center;"></td> <td>Water temperature: Max 70 °C</td> </tr> <tr> <td style="text-align: center;"></td> <td>Operating pressure: 0.5 - 8.0 bar</td> </tr> <tr> <td style="text-align: center;"></td> <td>Power source: 9V transformer</td> </tr> <tr> <td style="text-align: center;"></td> <td>Stern Soap & Water: Smart matching soap dispenser</td> </tr> </table>			Installation: Lavatory mounted		Water supply: Hot & Cold (2 inlets)		Water temperature: Max 70 °C		Operating pressure: 0.5 - 8.0 bar		Power source: 9V transformer		Stern Soap & Water: Smart matching soap dispenser								
	Installation: Lavatory mounted																				
	Water supply: Hot & Cold (2 inlets)																				
	Water temperature: Max 70 °C																				
	Operating pressure: 0.5 - 8.0 bar																				
	Power source: 9V transformer																				
	Stern Soap & Water: Smart matching soap dispenser																				

* All information of the above is for the reference only. No prior notice is made if any changes.



SPARE PARTS LIST

Smart 1000 Plus E (235650)

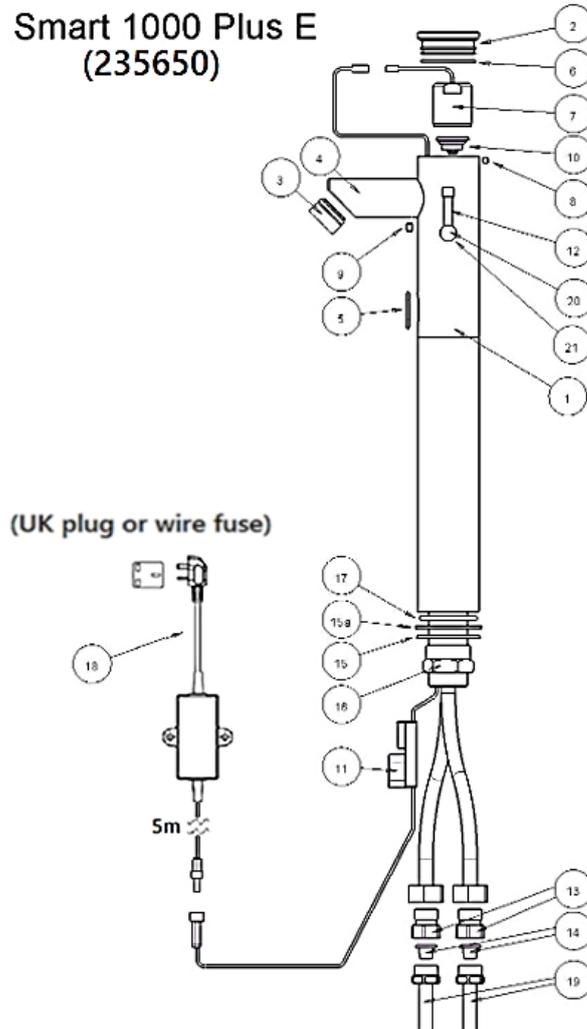

Quantity	Part Number	Description	Cat. No.
-	-	Seals and Screws Kit	07210022
1	6	O-ring	
1	17	O-ring	
1	5	O-ring	
1	15a	Gasket	
1	8	Screw	
1	9	Screw	
-	-	Sensor Kit	07220197
1	11	Infra Red Sensor	
1	5	O-ring	
-	-	Filter and Back Check Adapter Kit	08520003
1	13	Back check and Filter adapter	
1	14	Filter	
1	19	Nipple	
-	-	Cover Kit	07270003
1	2	Cover	
1	6	O-ring	
-	-	Solenoid Valve Kit	07230003
1	7	Solenoid valve	
1	10	Diaphragm	
-	-	Diaphragm	04500001
-	-	Mixer Handle kit	07260002
1	12	Handle	
1	20	Axis	
1	21	O-ring	
-	-	Transformer	TBC

Note: In order to locate the relevant spare part, please check the corresponding parts and part number in the drawing. Minimum order quantity will be required.


* All information of the above is for the reference only. No prior notice is made if any changes.




INSTALLATION

STEP 1 – PREPARATION FOR MOUNTING THE FAUCET

1 Shut off the water supply.

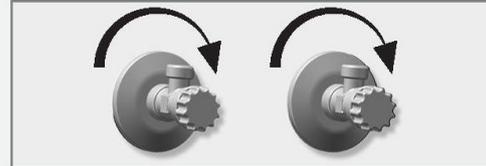


2 Remove the hexagonal nut, the disk and the gasket. Do not remove the O-ring from the base of the faucet.

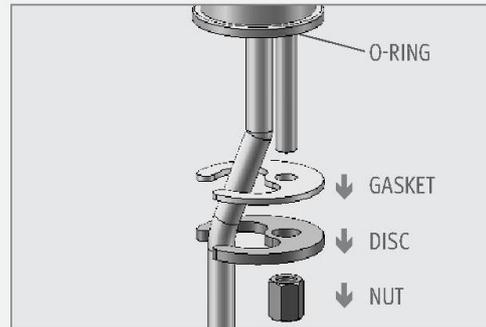


STEP 2 – INSTALLING THE FAUCET

1 Place the faucet with O-ring into the hole in deck or lavatory. Make sure the O-ring is located between the deck or lavatory and the bottom of the faucet.

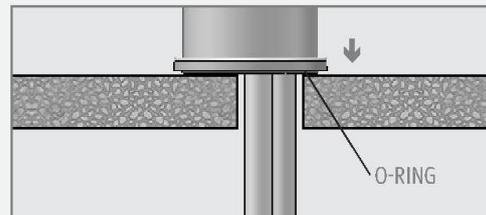

2 Slide the gasket, disk and hexagonal nut over the flexible hose and secure the faucet into place.

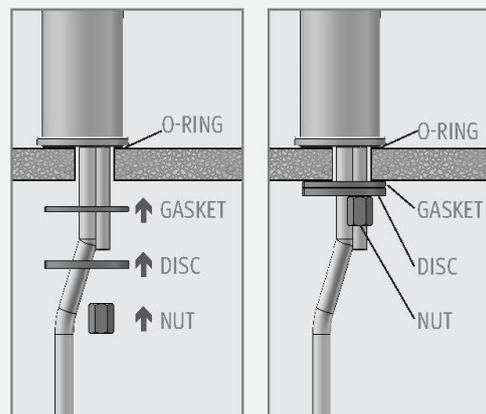




INSTALLATION

STEP 3 – CONNECTING THE WATER SUPPLY

1

Connect the flexible pipe to the water supply.


For models with temperature control connect the red flexible pipe to the hot water supply and the blue flexible pipe to the cold water supply.

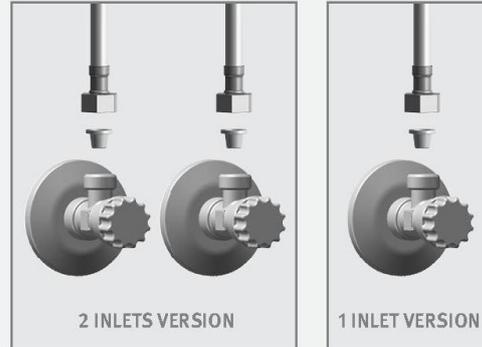

MAKE SURE THAT THE FILTER(S) IS/ARE INSTALLED BETWEEN THE FLEXIBLE PIPE AND THE SHUT OFF VALVE (ANGLE VALVE) (NOT SUPPLIED).

2

Turn on the central water supply and the shut-off valves (angle valves) and check for leaks.

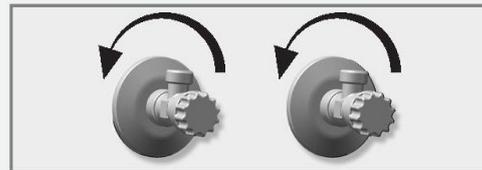




INSTALLATION

STEP 4 – CONNECTING THE POWER SOURCE

BATTERY VERSION

Install the battery box at the wall underneath the sink using the two sided adhesive foam tape. The cable connection must point down. (You can use an optional extension cable in order to assemble the battery box up to 10ft. away from the sink.)

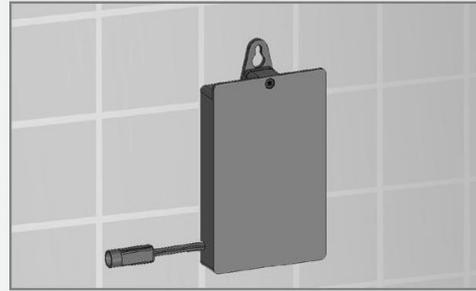

1

TRANSFORMER VERSION

Plug the transformer into the electricity socket and connect the connectors.



2

In order to avoid entering into the adjusting mode, wait 10 seconds before operating the faucet. If the range is unsatisfactory, refer to the section titled “settings adjustment.



ABOUT
10
SECONDS

NOTE: This model includes a special aerator that allows you to adjust the water stream direction on site in order to prevent water splashing if needed. To change the angle of the water stream, simply move the adjustable tilting plate by pressing it smoothly.

ATTENTION! the aerator is tightened to prevent removal by hand.





TROUBLESHOOTING

PROBLEM	INDICATOR	CAUSE	SOLUTION
No water coming out of the faucet:	1. Sensor flashes continuously when user's hands are within the sensor's range.	Low battery.	Replace battery
	2. LED in the sensor does not flash once when user's hands are within the sensor's range.	1. Range is too short. 2. Range is too long. 3. Battery is completely used up 4. Unit is in "Security Mode" 5. Sensor is picking up reflections from the washbasin or another object.	Increase the range Decrease the range The battery must be replaced. Eliminate cause of reflection.
	3. LED in the sensor flashes once when user's hands are within the sensor's range.	1. Connectors between the electronic unit and solenoid are disconnected. 2. Debris or scale in solenoid. 3. The central orifice in the diaphragm is plugged or the diaphragm is torn 4. The water supply pressure is higher than 8 bar. 5. The water supply pressure is under 8 bars and yet the pressure in the faucet's body is higher. This situation could be caused by a sudden increase in the water supply pressure that the back check prevents from dropping, even after water supply pressure drops under 8 bars.	Connect the electronic unit connectors to the solenoid. Unscrew solenoid, pull out the plunger and the spring from the solenoid and clean them. Use scale remover material if needed. When replacing the plunger, please make sure that the spring is in vertical position. Clean the orifice or replace diaphragm. Reduce the supply water pressure. Shut off water supply and unscrew one of the flexible pipes in order to reduce the pressure that blocks the product.
Water flow from spout does not stop:	1. Sensor flashes once when user's hands are within the sensor's range.	Debris or scale in diaphragm	Clean the orifice or replace diaphragm.
	2. LED in the sensor does not flash once when user's hands are within the sensor's range.	1. Sensor is dirty or covered.** 2. Sensor is picking up reflections from the washbasin or another object.	Clean or eliminate cause of interference. Decrease the range or eliminate cause of reflection.
Water flow diminished		Filter or aerator is clogged	Remove, clean, re-install

* "Security Mode": If the sensor is covered for more than 90 sec. the faucet will automatically shut off water flow. To return to normal operation remove any blockage.

** In this case, the water flow will stop anyway after 90 seconds because of the security time.