



Since 1949

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong


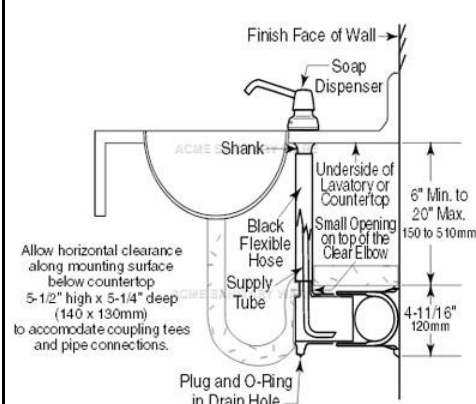
Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

Item Descriptions	Bobrick (USA) Lavatory-mounted soap dispensers with under-the-counter soap reservoir	<div>Illustration/ Drawing</div> 
Model	B-922	
Spout Material/ Finish	ABS/ Chrome Plated	
Manufacturer	Bobrick Washroom Equipment Inc. (USA)	
Supplier	Acme Sanitary Ware Co. Ltd Mr. Eric Wong/ Mr. Don Yuen	
Contact Tel/Fax	(852) 2388-7171 / (852) 2710-8012	
E-mail	acme@acmesanitary.com.hk	
Website	www.acmesanitary.com.hk	
MATERIALS: Piston, Spout, and Cover — Type-304 stainless steel with bright polished finish. Cover Spacer — Rigid, impact-resistant polyester. Escutcheon — Chrome-plated, high-impact-resistant ABS with bright polished finish. Concealed locking mechanism. Body and Shank — High-impact-resistant ABS. Valve — ABS cylinder. Stainless steel spring. U-packing seal and duckbills. Corrosion-resistant to most soaps and detergents. Equipped with a 36" (915mm) long supply tube; cut-to-fit in the field. Coupling Tee — Black molded ABS. Fits standard 3" ABS or PVC pipe, schedule 40, with 3-1/2" (90mm) outside diameter (88–90mm nominal pipe sizes). Clear Elbow — Smoke-grey, translucent ABS. 10" (255mm) long; cut-to-fit in the field. Drain hole in the bottom has a removable threaded plug with o-ring. Black Flexible Hose — 1-1/4" (32mm) diameter, black, flexible Silicone plastic hose. 33" (840mm) long; cut-to-fit in the field.		
Designer's Notes: Mounting screws, pipe connections, and end-caps are not furnished. Provide 1/4" (6mm) screws, washers, and lock-washers. Purchase pipe connections and end-caps locally from plumbing supply wholesaler. Pipe connection must be standard 3" ABS or PVC pipe, schedule 40, with outside diameter (88–90mm nominal pipe sizes). Black ABS end-caps for 3" standard U.S./Canadian pipe with 3 -1/2" outside diameter are available from Bobrick as an optional accessory; order Bobrick Part No. 922-45 (set of 2 end-caps		

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.



Since 1949

Acme Sanitary Ware Co. Ltd.

1/F, Acme Building, 22-28 Nanking Street, Kowloon, Hong Kong

Tel: 2388 7171 Fax: 2710 8012

Email: acme@acmesanitary.com.hk

Website: www.acmesanitary.com.hk

PROJECT		REF		REV	ITEM CODE	
LOCATION		DATE			PAGE	

SANITARY WARE SPECIFICATION SHEET

1 1/16" (25 1/8mm) Dia. Mounting Hole

6" Min. to 20" Max.
150 to 510mm

4-11/16" (120mm)

Plug and O-Ring in Drain Hole

Allow horizontal clearance along mounting surface below countertop 5-1/2" high x 5-1/4" deep (140 x 130mm) to accommodate coupling tees and pipe connections.

7-7/8" (200mm)

11-13/16" (300mm)

Centerline of coupling tee should be within 6" (150mm) of soap dispenser centerline.

Soap Dispenser

Soap Pump Assembly

Black Flexible Hose

Clear Elbow

Coupling Tee

Pipe Connections not furnished

End-Caps available from Bobrick as optional accessory, order Part No. 922-45 for 3" standard pipe size.

Specify Model Required:

Model Number	<input type="checkbox"/> B-922	<input type="checkbox"/> B-9226
Spout Length	4" (100mm)	6" (150mm)
Spout Height	3" (75mm)	3-7/8" (100mm)

REPLACEMENT PARTS LIST

Soap Dispenser (includes Soap Pump Assembly, and Universal Mounting Group)	4" (100mm) Spout 922-405	6" (150mm) Spout 9226-405
Soap Pump Assembly (includes Escutcheon, Piston, Spout, Valve, and Supply Tube)	4" Spout 922-619	6" Spout 9226-619
Universal Mounting Group (includes Plastic & Rubber Washers, Shank, Spring Washer, and Retaining Nut)	822-402	
BobKey 24-17		
ABS End-Caps (set of 2) for 3" (75mm) standard pipe in U.S.A. and Canada (optional) 922-45		
Pipe Connections (not furnished)		
Black Flexible Hose 922-20		
Plug 922-10 and O-Ring 922-11		
Clear Elbow 922-2		
Coupling Tee 922-1		
Mounting Screws (not furnished)		

The B-922 Series Under-The-Counter Reservoir contains a large volume of soap. Impact by washroom maintenance equipment, or acts of vandalism may cause soap to leak onto the floor creating a safety hazard.

To reduce the possibility of this hazard, the following steps are recommended.

- 1) Install B-922 Series Mounting/Coupling Tees as high as possible under lavatory or countertop.
- 2) Reduce the length of each Clear Elbow (Installation Step No. 6) to minimize B-922 Series projection from the wall.
- 3) Keep washroom maintenance away from Under-The-Counter Soap Reservoir.
- 4) Do not install the B-922 Series in washrooms subject to vandalism.

Note:

* All information of the above is for the reference only. No prior notice is made if any changes.

Source: Bobrick Washroom Equipment Inc.